


0' 8' 16' 32' 64'

SITE LIGHTING DESIGN SCOPE



Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC


Revisions:	
Landmarks Resubmission	2024.12.30

THESE DRAWINGS ARE FOR THE EXCLUSIVE USE OF SPINAOROURKE + PARTNERS, INC. AND MAY NOT BE DUPLICATED, REPRODUCED OR USED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SPINAOROURKE + PARTNERS, INC. ALL RIGHTS RESERVED



The Society of the Four Arts - John E. Rovensky Building

100 Four Arts Plaza, Palm Beach, FL 33480




SPINAOROURKE
+ PARTNERS

Architecture • Interior Design
Keith M. Spina # AN13419

285 Banyan Blvd
West Palm Beach
Florida 33401
561.684.6844
spinaorourke.com
FL Lic # RA00002399

120 Broadway
20th Floor
New York, NY
212.779.8900
beyerblinderbelle.com

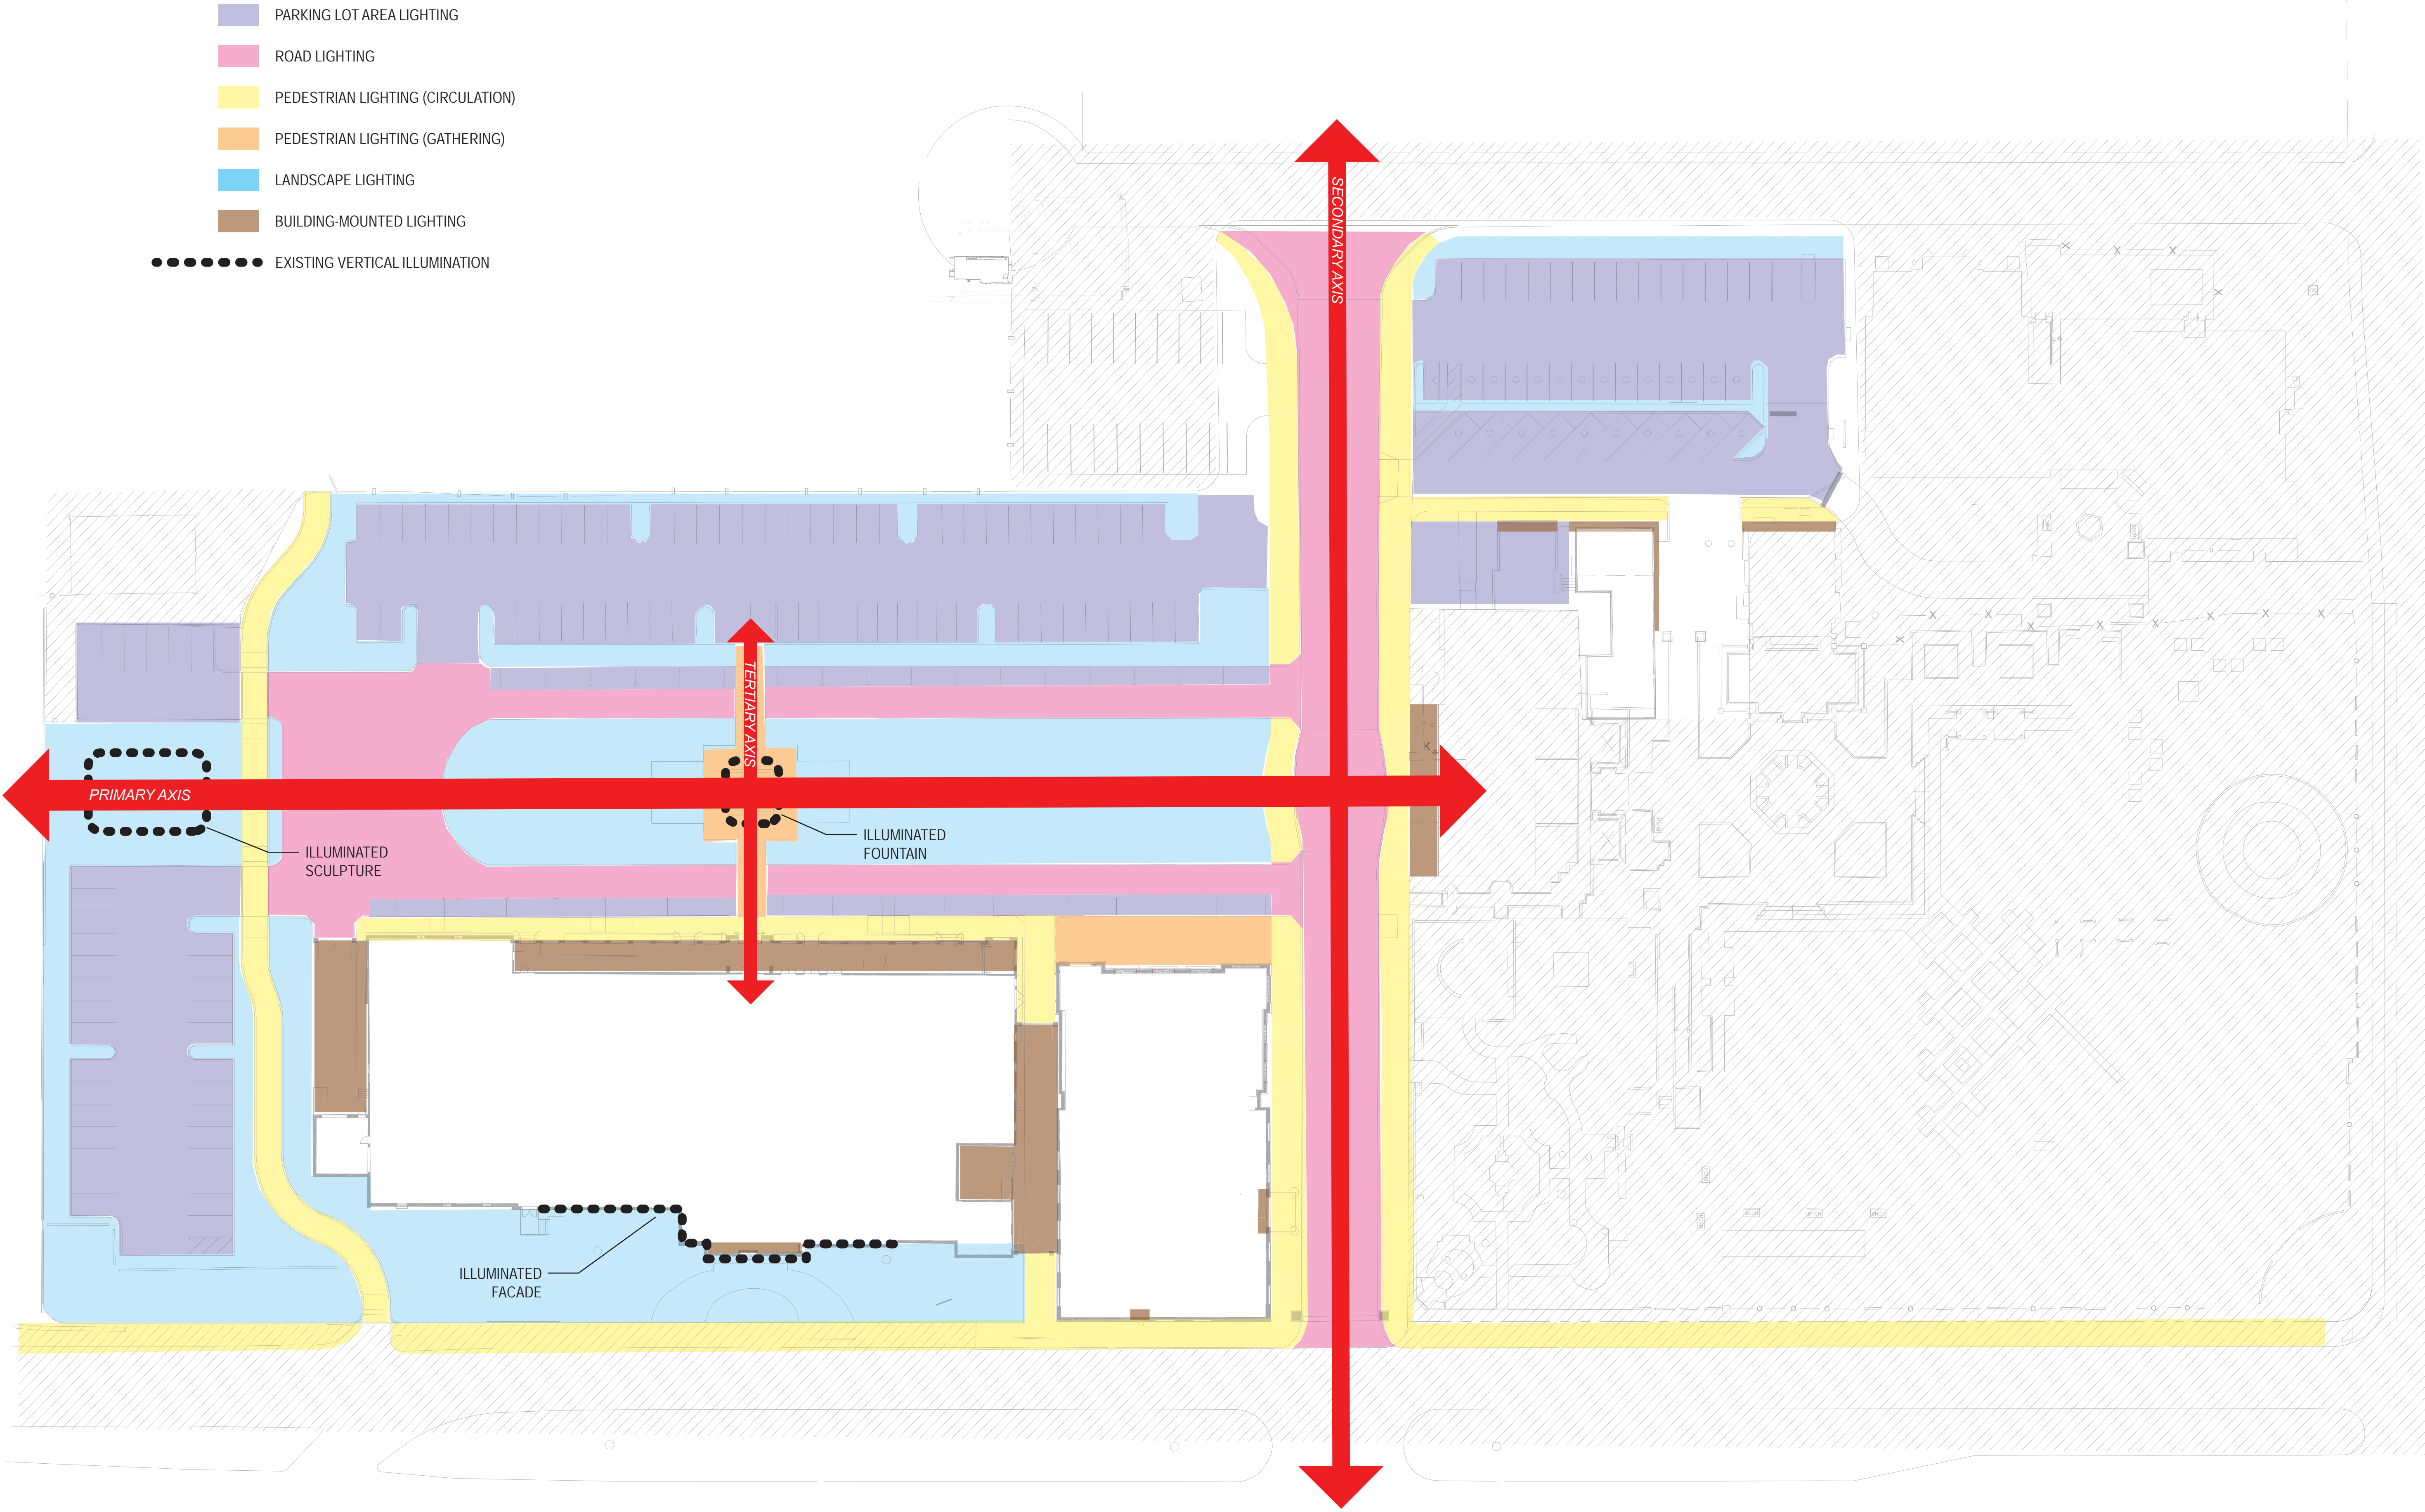

120 Broadway
20th Floor
New York, NY
212 778 2800
beyerblinderbelle.com

285 Banyan Blvd
West Palm Beach
Florida 33401
561.684.6844
spinaorourke.com
FL Lic # RA00002399


SPINAOROURKE
+ PARTNERS
Architecture • Interior Design
Keith M. Spina # AY13419

The Arts
**The Society of the Four Arts -
John E. Rovensky Building**
100 Four Arts Plaza, Palm Beach, FL 33480

THESE DRAWINGS ARE FOR THE
EXCLUSIVE USE OF SPINA OROURKE +
PARTNERS, INC. AND MAY NOT BE
DUPLICATED, REPRODUCED OR USED IN
ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SPINA OROURKE
+ PARTNERS, INC. ALL RIGHTS RESERVED

Revisions:	
Landmarks Resubmission	2024.12.30

Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC

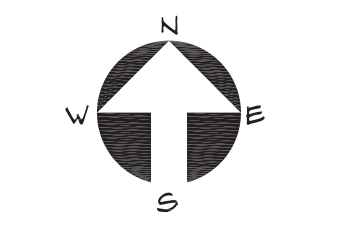

LT.1.2
Final Submittal

SITE LIGHTING CONCEPT DIAGRAM



TYPE A



TYPE B



TYPE C



TYPE D



TYPE F



TYPE G



TYPE H




TYPE J



TYPE K



TYPE M

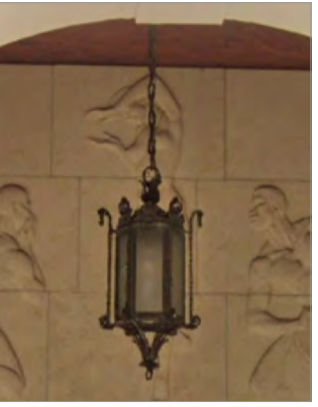

TYPE N



TYPE P



TYPE Q




TYPE R



EXISTING SITE LIGHTING

LT.1.3

Final Submittal



Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC

Revisions:
Landmarks Resubmission 2024.12.30

THESE DRAWINGS ARE FOR THE EXCLUSIVE USE OF SPINAOROURKE + PARTNERS, INC. AND MAY NOT BE DUPLICATED, REPRODUCED OR USED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SPINAOROURKE + PARTNERS, INC. ALL RIGHTS RESERVED

The Society of the Four Arts -
John E. Rovensky Building
100 Four Arts Plaza, Palm Beach, FL 33480



SPINAOROURKE
+ PARTNERS
Architecture • Interior Design
Kath M. Spina # AN13419

285 Banyan Blvd
West Palm Beach
Florida 33401
561.684.6844
spinaorourke.com
FL Lic # RA00002399

120 Broadway
20th Floor
New York, NY
212.778.8990
beyerblinderbelle.com


TOWN OF PALM BEACH EXTERIOR LIGHTING REQUIREMENTS - COMPLIANCE NOTES

1. LIGHT FIXTURE CUT SHEETS AND LIGHTING LOCATIONS ARE SHOWN BELOW.
2. PARKING LOT LIGHTING CONSISTS OF COLUMN TOP FIXTURES SO IT IS EXEMPT FROM REQUIREMENT THAT SOURCES OF ILLUMINATION SHOULD NOT BE VISIBLE FROM OUTSIDE THE PROPERTY LINE.
3. N/A, LED LIGHTING ONLY
4. PARKING LOT LIGHTING DOES NOT EXCEED 8 FOOTCANDLES. TOTAL WATTAGE OF ALL PARKING LOT AREAS SHOWN IS BELOW 3000 WATTS.
5. N/A, LED LIGHTING ONLY
6. N/A, LED LIGHTING ONLY
7. N/A, LED LIGHTING ONLY
8. QUANTITY OF LANDSCAPE LIGHTING FIXTURES DOES NOT EXCEED 150 PER ACRE.
9. MINIMAL DECORATIVE WALL-MOUNTED FIXTURES ARE USED. SECURITY LIGHTING IS FULLY SHIELDED AND NOT VISIBLE OUTSIDE THE PROPERTY LINE.
10. LIGHT SPILL OUTSIDE PROPERTY LINES DOES NOT EXCEED 0.5 FOOTCANDLES. PARKING LOT LIGHTING IS DIRECTED TOWARD THE GROUND AND DOES NOT CREATE GLARE FOR ABUTTING PROPERTIES OR PASSERSBY.
11. SHIELDED WALL-PACKS AT LOADING DOCK, ALLEY, AND EQUIPMENT YARD ARE CONCEALED BEHIND GATES AND NOT VISIBLE OUTSIDE THE PROPERTY LINE.
12. N/A, LED LIGHTING ONLY
13. ALL PARKING LOT LIGHTING IS 4000K.
14. GROUND-MOUNTED LIGHT FIXTURES CONSIST OF DECORATIVE PATH LIGHTS IN LANDSCAPE AT O'KEEFE BUILDING ARCADE, AND IN-GRADE UPLIGHTS NOT VISIBLE FROM OUTSIDE THE PROPERTY LINE.

NOTE: EXCEPT FOR BUILDING-MOUNTED FIXTURES AT LOADING DOCK, CALCULATIONS INCLUDE POLE-MOUNTED FIXTURES ONLY. MOUNTING HEIGHT FOR ALL POLE-MOUNTED FIXTURES = 12'-0"

CALCULATION SUMMARY

LOCATION	FIXTURE QTY.	TOTAL AREA (SQ.FT.)	TOTAL LOAD (WATTS)	CALCULATION TYPE	UNITS	AVG.	MAX.	MIN.	AVG/MIN	MAX/MIN
WEST CAMPUS - SOUTHWEST PARKING LOT	7	9,930	560	ILLUMINANCE	FC	2.3	6.8	0.2	11.3	34
WEST CAMPUS - NORTH PARKING LOT	11	20,635	880	ILLUMINANCE	FC	1.6	6.4	0.1	16.4	64
WEST CAMPUS - NORTHWEST PARKING LOT	2	2,620	160	ILLUMINANCE	FC	2.6	5.7	0.1	26.6	57
EAST CAMPUS - PARKING LOT	9	15,111	720	ILLUMINANCE	FC	2.3	7.8	0.1	23.1	76
PARKING LOTS - TOTAL	27	48,296	2320	ILLUMINANCE	FC	2	7.6	0.1	20	76
WEST CAMPUS - DRIVEWAY	20	21,407	1600	ILLUMINANCE	FC	2.3	5.7	0.7	3.2	8.1
WEST CAMPUS - FOUR ARTS PLAZA	14	14,495	1120	ILLUMINANCE	FC	2.3	3.7	0.8	2.8	4.6
ROADS - TOTAL	34	35,902	2720	ILLUMINANCE	FC	2.3	5.7	0.7	3.3	8.1
WEST CAMPUS - LAKE TRAIL	N/A	3,608	N/A	ILLUMINANCE	FC	1.1	5.0	0.1	12	50
WEST CAMPUS - O'KEEFE SIDEWALK	N/A	1,554	N/A	ILLUMINANCE	FC	1.2	2.3	0.9	1.3	2.6
WEST CAMPUS - PEDESTRIAN PLAZA	N/A	3,248	N/A	ILLUMINANCE	FC	2.3	3	1.8	1.3	1.7
WEST CAMPUS - CHILDREN'S PLAZA	N/A	1,593	N/A	ILLUMINANCE	FC	1.0	1.7	0.6	1.7	2.8
WEST CAMPUS - FAP WEST SIDEWALK	N/A	2,883	N/A	ILLUMINANCE	FC	2.4	3.9	0.8	3.0	4.9
WEST CAMPUS - FAP EAST SIDEWALK	N/A	2,182	N/A	ILLUMINANCE	FC	2.0	3.0	0.5	3.9	6.0
EAST CAMPUS - SIDEWALK	N/A	580	N/A	ILLUMINANCE	FC	0.3	1.6	0.1	3.4	16
SIDEWALKS - TOTAL	N/A	15,648	N/A	ILLUMINANCE	FC	1.5	5.0	0.1	15	50
LOADING DOCK	N/A	1,540	148	ILLUMINANCE	FC	6.3	15.3	0.9	7	17

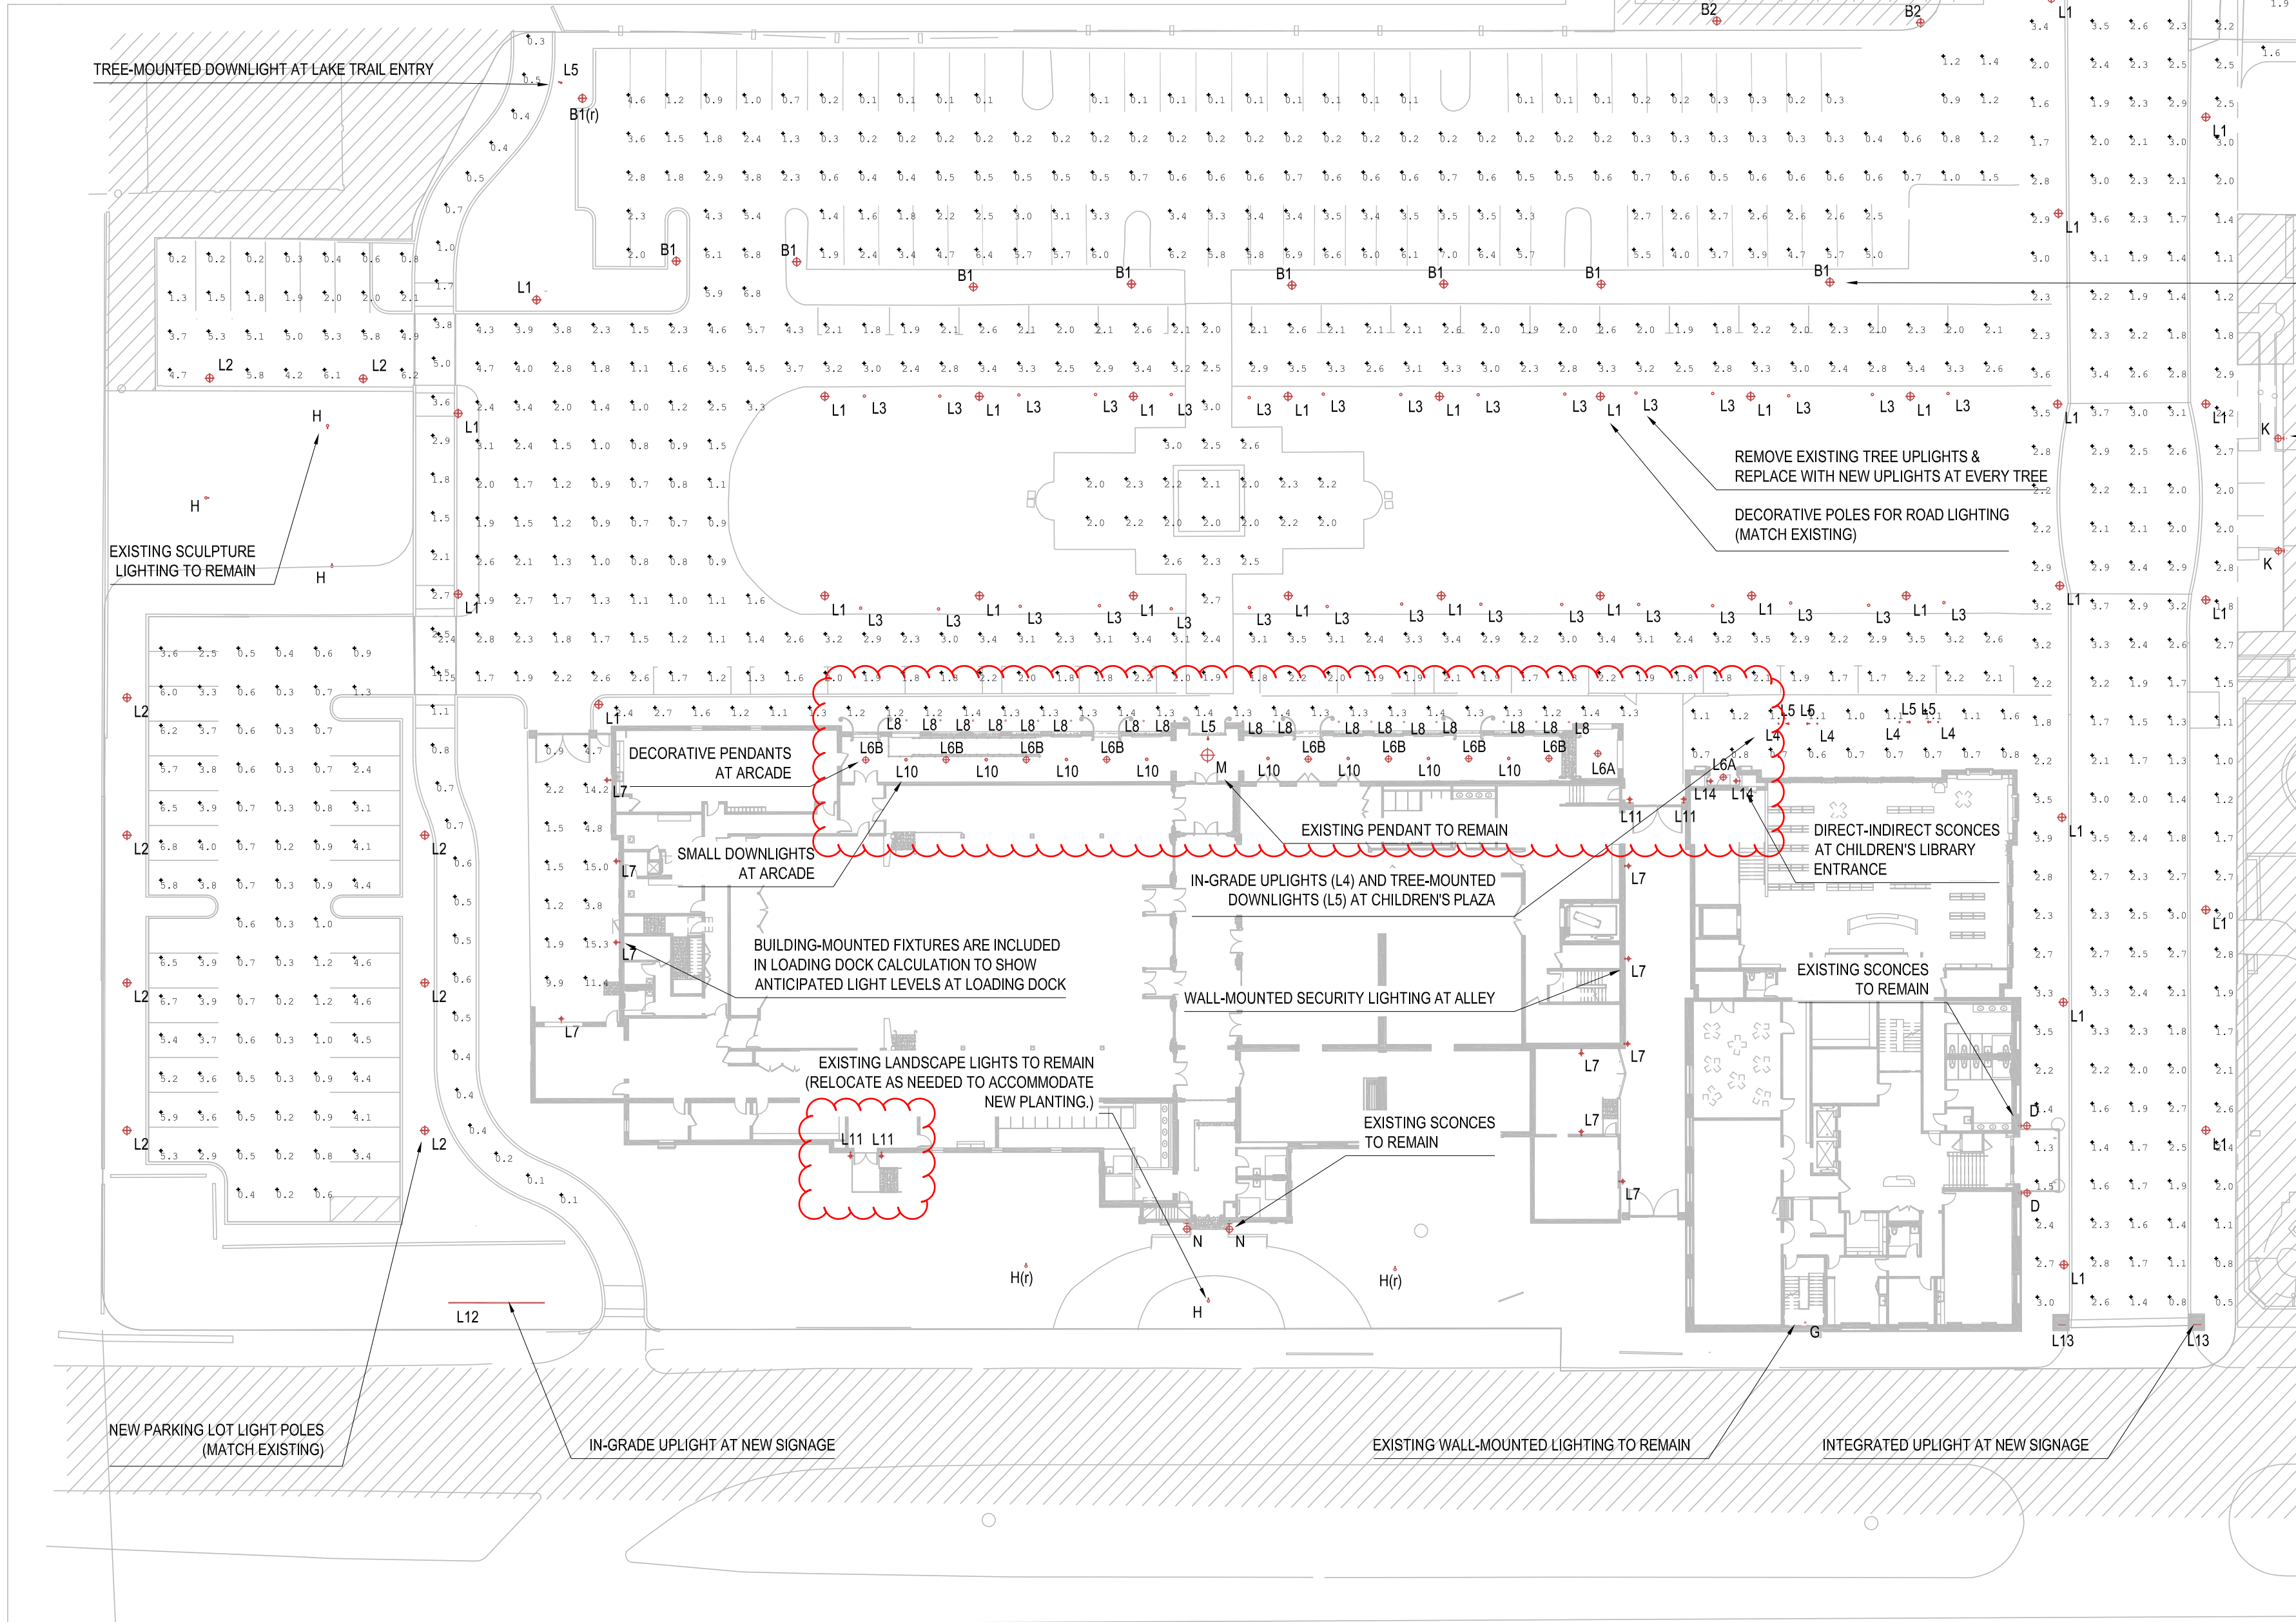

EXISTING LIGHT POLES TO REMAIN



EXISTING MUNICIPAL STREET LIGHT TO REMAIN

EXISTING LIGHT POLES TO BE RELOCATED

DECORATIVE SCONCES AT SHADE HOUSE

EXISTING SCONCES TO REMAIN

EXISTING LANTERNS TO REMAIN

EXISTING LIGHT POLES TO REMAIN

EXISTING SCONCES TO REMAIN

LIGHT FIXTURE SCHEDULE

FIXTURE TYPE	LIGHT SOURCE	VOLTAGE (V)	SYSTEM POWER (Watt, K, or ft)	OUTPUT (lm)	OPTICS	CRI	CCT (K)	CONTROL TYPE	MANUFACTURER PRODUCT	DESCRIPTION	
B1	LED (INTEGRAL DRIVER)	120-277	80	Wuln	7000	TYPE III	70	4000	0-10V	BEACON WIN40-AC-30NB-80-4K-UNV-QIR3-PT-SPK-BBT	EXISTING POLE-MOUNTED AREA LIGHT AT PARKING LOTS. EXISTING TO REMAIN.
B1 POLE					N/A					BEACON RSAB-FLAK-S-12-40-B	12'-0" EXISTING LIGHT POLE AT PARKING LOTS. EXISTING TO REMAIN.
B2	LED (INTEGRAL DRIVER)	120-277	80	Wuln	7000	TYPE IV	70	4000	0-10V	BEACON WIN40-AC-30NB-80-4K-UNV-QIR4-PT-SPK-BBT	EXISTING POLE-MOUNTED AREA LIGHT AT PARKING LOTS. EXISTING TO REMAIN.
B2 POLE					N/A					BEACON RSAB-FLAK-S-12-40-B	12'-0" EXISTING LIGHT POLE AT PARKING LOTS. EXISTING TO REMAIN.
L1	LED (INTEGRAL DRIVER)	120-277	80	Wuln	7000	TYPE V	70	4000	0-10V	BEACON WIN40-AC-36L-80-4K-UNV-QIR5-PT-SPK-BLT	12'-0" PEDESTRIAN LIGHT POLE. MATCH EXISTING (TYPE B) WITH MODIFIED OPTICS.
L1 POLE					N/A					BEACON RSAB-FLAK-S-12-40-B	12'-0" LIGHT POLE AT PARKING LOTS. MATCH EXISTING.
L2	LED (INTEGRAL DRIVER)	120-277	80	Wuln	7000	TYPE III	70	4000	0-10V	BEACON WIN40-AC-30NB-80-4K-UNV-QIR3-PT-SPK-BBT	12'-0" PEDESTRIAN LIGHT POLE. MATCH EXISTING (TYPE B).
L2 POLE					N/A					BEACON RSAB-FLAK-S-12-40-B	12'-0" LIGHT POLE AT PARKING LOTS. MATCH EXISTING.
L3	LED (REMOTE DRIVER)	24VDC	10	Wuln	690	14"	85	3000	0-10V	FLIK RDT60-TMH-30-SP-24-XX/FEED CABLE LENGTH-1	IN-GRADE UPLIGHTS AT TREES
L4	LED (REMOTE DRIVER)	24VDC	6	Wuln	450	31"	85	3000	0-10V	FLIK RDT60-TMH-30-FL-24-XX/FEED CABLE LENGTH-1	IN-GRADE UPLIGHTS AT CHILDREN'S PLAZA
L5	LED (REMOTE DRIVER)	120-277	7	Wuln	450	30"	90	3000	0-10V	BK LIGHTING MH-LED-483-FL-XX/FINISH-12-11-XX(CAP)	ADJUSTABLE ACCENT LIGHT AT TREES AND O'KEEFE ARCADE
L6A					TBD					LIGHTS OF TUSCANY 2024-3 SPANISH STYLE PENDANT HANGING LIGHT	DECORATIVE PENDANT AT O'KEEFE ARCADE (SHOWN FOR DESIGN INTENT)
L6B					TBD					LIGHTS OF TUSCANY 2024-1 SPANISH-CONTEMPORARY WROUGHT IRON PENDANT LIGHT	DECORATIVE PENDANT AT O'KEEFE ARCADE (SHOWN FOR DESIGN INTENT)
L7	LED (INTEGRAL DRIVER)	120-277	37	Wuln	3339	DIFFUSE	71	3000	0-10V	RAB SLIM-FC-37-Y-XX/FINISH-010	BUILDING-MOUNTED LIGHT AT ALLEY AND LOADING DOCK
L8	LED (REMOTE DRIVER)	24VDC	4	Wuln	114	DIFFUSE	82	2700	0-10V	CAST COPLCHB	PATH LIGHT AT LANDSCAPING
L9					TBD					LIGHTS OF TUSCANY 7012-1 SANTA BARBARA WROUGHT IRON TORCH	DECORATIVE SCONCE AT O'KEEFE ARCADE (SHOWN FOR DESIGN INTENT)
L10	LED (INTEGRAL DRIVER)	12VAC	8.4	Wuln	565	40"	90	3000	0-10V	HEVLITE HL-336-XX/FINISH-BLED-E-FL-12L-1	DOWNLIGHT AT O'KEEFE ARCADE
L11					TBD					LIGHTS OF TUSCANY 7280-1 TUSCAN-SPANISH STYLE OUTDOOR LIGHTING FIXTURE	DECORATIVE SCONCE AT SHADE HOUSE (SHOWN FOR DESIGN INTENT)
L12	LED (REMOTE DRIVER)	24VDC	2.3	Wuln	80	31"	80	3000	0-10V	FLIK SMD-100-H-30-FL-24	IN-GRADE LINEAR UPLIGHT AT SIGNAGE
L13	LED (REMOTE DRIVER)	120/24VDC	1.5	WIF	109	DIFFUSE	98	3000	0-10V	OTL KURY-SW-XX(MOUNTING)-WET-30-1-5-ENCLT-XX-XX(WIRE IN/OUT)-XX(END CAPS)-XX(LENGTH)	LINEAR LED INTEGRATED AT FOUR ARTS PLAZA ENTRY POSTS
L14	LED (INTEGRAL DRIVER)	120-277	28	Wuln	2235	18" UP 18" DOWN	80	3000	0-10V	BEGA B040B-K3-XX/FINISH	DIRECT-INDIRECT SCONCE AT CHILDREN'S LIBRARY ENTRANCE

NOTE: EXCEPT FOR TYPE L7 AT LOADING DOCK, CALCULATIONS INCLUDE POLE-MOUNTED FIXTURES ONLY: TYPES B1, B2, L1, L2

120 Broadway
20th Floor
New York, NY
212 778-2800
beyerblinderbelle.com

285 Banyan Blvd
West Palm Beach
Florida 33401
561.684.6844
spinaorourke.com
FL Lic # PA00002379


SPINAOROURKE
+ PARTNERS
Architecture • Interior Design
Kath M. Spina # AY13419

The Society of the Four Arts -
John E. Rovensky Building
100 Four Arts Plaza, Palm Beach, FL 33480

THESE DRAWINGS ARE FOR THE EXCLUSIVE USE OF SPINAOROURKE + PARTNERS, INC. AND MAY NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SPINAOROURKE + PARTNERS, INC. ALL RIGHTS RESERVED.

Revisions:
Landmarks Resubmission 2024.12.30


Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC



LT.2.1

Final Submittal

TYPE L3



Win40

40" WINDSOR LUMINAIRE

DATE: _____

LOCATION: _____

TYPE: _____

PROJECT: _____

CATALOG #: _____

ORDERING GUIDE

Example: WIN40-AC-24L-SS-SK-UNV-QR2-PEC-PT-SBK-PLT

CATALOG # []


ORDERING INFORMATION

WIN40	Series	Lens Option	Engine/Watts	CCC Color Temp	Voltage	QR2	Electrical Options
WIN40	WIN40-XX	AC* Acrylic, frosted AS Acrylic, seeded AW Acrylic, white PC Polycarbonated, clear PF Polycarbonated, frosted	24L-19 19 watts -LED only 35L-80 80 watts -LED only 48L-160 160 watts -LED only 60L-136 136 watts -LED only	3K 3000K 4K 4000K 5K 5000K (adj)	UNV 220-277V 347 347V 480 480V	QR2 Type I DIR2 Type II DIR4 Type IV DIR5 Type V	PEC Photocell, button → TYPE B1, L2 → TYPE B2 → TYPE B1

Controls Options	Mounting Options	Style Options	Color
GEN-XX Emergent	PT For TO PW Pendant Mount	SPK Sinks	BLT Back Matte Textured BL5 Back Glass Smooth DBT Dark Bronze Matte Textured DBS Dark Bronze Glass Smooth GTT Graphite Matte Textured LGS Light Gray Glass Smooth PSS Platinum Silver Smooth WMT White Matte Textured WGS White Glass Smooth WST White/Green Textured
			Color Option CC Custom Color

Notes:

- When ordering Emergent, specify the routine setting codes (example GEN-04, See Emergent brochure and instructions for setting sites and options. Not available with sensor options.
- 42" only



currentlighting.com/beacon



© 2025 All Rights Reserved. All rights reserved. Information and specifications subject to change without notice. All values are design to fit (note values when measured color accuracy conditions).

Page 9 of 9

Rev: 08/04/22

WIN_40_LED_Luminaire_Rev01_2021

TYPE L4

 	
<h2>RDТ60 Tilt Adjustable</h2> <h3>ORDERING INFORMATION</h3>	
MODEL	RDТ60
INSTALLATION	
TM	• Trim (TM)
TS	• Trimless (TS)
POWER	
H	• H - 8W, 2700K - 3000K - 450 lm
COLOR TEMP.	
27	• 27 - 2700K
30	• 30 - 3000K
OPTICS	
SP	• SP - Spot - 14°
FL	• FL - Flood - 31°
SX	• SX - Spot - 14° + hax
FX	• FX - Flood - 31° + hax
VOLTAGE	
24	• 24 - 24VDC fixture voltage
OPTIONS	
3	• 3 - luminaire supplied with 3m (10') feed cable
6	• 6 - luminaire supplied with 6m (20') feed cable
9	• 9 - luminaire supplied with 9m (30') feed cable
GLARE CONTROL	
0	• 0 - no half moon
1	• 1 - with half moon

**The Society of the Four Arts -
John E. Rovensky Building**
100 Four Arts Plaza, Palm Beach, FL 33480

SPINAOROURKE
+ PARTNERS

285 Banyan Blvd
West Palm Beach
Florida 33401

561.684.6844
spinaorourke.com
FL Lic # AA240002399


Architecture • Interior Design

Keith M. Spina # AR13419

THESE DRAWINGS ARE FOR THE
EXCLUSIVE USE OF SPINA OROURKE +
PARTNERS, INC. AND MAY NOT BE
DUPLICATED, REPRODUCED OR USED IN
ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SPINA OROURKE
+ PARTNERS, INC. ALL RIGHTS RESERVED

Revisions:	
Landmarks Resubmission	2024.12.30

Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC



LT.2.2

Final Submittal

TYPE L7 (SHOWN FOR DESIGN INTENT)

SLIMCF37Y/D10

RAB

37, 57 and 62 Watt SLIM Wall packs are designed to cover the footprint of most traditional wall packs. They are suitable for mounting heights from 20' to 30', and replace HD Wallpacks from 200W N/A to 320W LM. These ultra-high efficiency fixtures are available in cut-off or full cut-off models.

Color: Bronze

Weight: 8.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.31A
208V	0.15A
240V	0.16A
277V	0.14A
Input Watts	35.2W

LED Info

Watts	37W
Color Temp	3000K (Warm)
Color Accuracy	71 CRI
L70 lifespan	100,000 hours
Lumens	3,339 lm
Efficiency	94.9 lm/W

Technical Specifications

Compliance

UL Listed:
Suitable for Wet Locations, Wall Mount Only.

IP Rating:

Ingress protection rating of IP66 for dust and water

IESNA LM-79 & LM-80 Testing:

RAB LED components have been tested in accordance with IESNA LM-79 and LM-80.

Dark Sky Compliance:

Allows for conformance to the IESNA's fully shielding requirement, emitting no light above 90 degrees.

Construction

Footprint:
Designed to replace RAB HD RPI wall packs, both in size and footprint template, so upgrading to LED is easy and seamless.

Cold Weather Rating:

The minimum start temperature is -40°C (-40°F)

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Housing:

Precision die-cast aluminum housing and door frame

Mounting:

Die-cast back box with four (4) conduit entry points and knockout pattern for junction box or direct wall mounting. Hinged housing and bubble level for easy installation.

Full Cutoff:

Allows for conformance to the IESNA's fully shielding requirement, emitting no light above 90 degrees.

Recommended Mounting Height:

Up to 20 ft

Lens:

Micropatterned; diffusion glass lens reduces glare and has smooth and even light distribution

Reflector:

Specular thermoplastic

Gaskets:

The unique design of the right lock gasket ensures no water or environmental elements will ever get inside the SLIM fixture

Finish:

Formulated for high durability and long-lasting color

Green Technology

Mercury and VDF Free, RoHS-compliant components.

LED Characteristics

LED:

Long-life, high-efficiency, micro-power, surface mount LEDs, binned and mixed for uniform light output and color

Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture to fixture color

Performance

100,000 Hour LED lifespan based on IESNA LM-80 results and TM-21 calculations

Other

Accessories:

Available accessories include polycrystal and wire support. Click badge to see all accessories.

Need help? | Tech help email: 888.422.1000 Email: sales@raztaghing.com Website: www.raztaghing.com

Copyright © 2024 RAB Lighting, All Rights Reserved. Note: Specifications are subject to change at any time without notice.

Page 1 of 3

SLIMFC37Y/D10

RAB

Technical Specifications (continued)

Patents:

The design of the SLIM™ is protected by patents pending in US, Canada, China, Taiwan and Mexico

HID Replacement Range:

Replaces 200W Metal Halide

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Optical

BUG Rating:

B1 UD-G0

Electrical

Driver:

Constant Current, 100-277V, 50/60Hz, 100-277VAC
0.6A, 4kV Surge Protection, 700mA, Power Factor
99.3%.

Dimensions

Features

Covers footprint of most traditional wall packs

Easy installation with hinged access, bubble level and multiple conduit entries

Tight-flock gasket keeps elements out

100,000-Hour LED Lifetime

5-Year, No-Compromise Warranty

need help? Tech help line: 888.722.1000 email: sales@rablighting.com Website: www.rablighting.com

Copyright © 2024 RAB Lighting All Rights Reserved. Note: Specifications are subject to change at any time without notice

Page 2 of 3

TYPE L8

LANDSCAPE™

Old world craftsmanship...tomorrow's technology™

CAST Craftsman Series China Hat Path Light (CCPLCHB and CCPLCHBL)

Now Available with **Integrated LED** or **Drop-In LED**

Description:

These solid bronze path lights are compact with extreme durability. Now available with integrated LED lamps or bi-pin drop-in LED lamps.

Features:

Durability

- ❑ CAST solid sand-cast bronze for unmatched corrosion resistance
- ❑ Unbreakable bodies, hats, stems, and stake
- ❑ No coatings to peel, flake, chip, or fade
- ❑ No threads that weaken stems
- ❑ Marine-grade Tin-Coated No-Ox Wire for lifetime electrical conductivity.

Performance

- ❑ Premium-quality LEDs deliver consistent color temperature and accurate color rendering.
- ❑ Electronics protected from electrical spikes and surges.
- ❑ Electromagnetic interference (EMI) filtered to prevent interference with wireless devices

Uses:

Suitable for lighting walkways, planting beds, and other areas.

Dimensions:

- 8.5" stake, 18" height body and stem
- Hat: 6" diameter x 1.75" height

Specifications:

CCPLCHB Integrated LED:

- LED components integrated into fixture bodies to draw heat away from the LEDs for maximum longevity and performance.
- Fully sealed and protected LED components.
- LED Light Source: 2 Cree LED, Life (L70): 62,000 Hrs.
- Color Temp: 2700°K, CRI: 82
- Input Voltage: 10-24 Volts AC or DC
- Power: 4 Amps, 4.22 Watts, Power Factor .89, Volt Amps 4.74
- Lumen output-fixture: 114 lm
- Maximum Candela: 46

CCPLCHBL Drop-In LED:

- Lamp is field replaceable
- LED Light Source: SLBP250L Drop-In Bi-Pin Lamp (included).
- Color Temp: 2750°K, CRI: 80
- Voltage Range: 10-20 Volts AC or DC
- Power: 2.5 Watts, Volt Amps 3.0
- Lumen output-fixture: 114 lm

Construction:

Solid sand cast Bronze hat and stakes; copper stems 5" tin-coated #18-2 No-Ox marine-grade wire.

Listing:

UL 1838 Listed Low Voltage Luminaire for wet locations.

www.cast-lighting.com 800.914.CAST

© Copyright 2019, CAST Lighting LLC. All rights reserved.

Revised April 2023

TYPE L9 (SHOWN FOR DESIGN INTENT)

Sale Price: **\$799.00**
 Original Price: ~~**\$899.00**~~
 SKU 7012-1
 7012-1 Santa Barbara Wrought Iron Torch

DETAILS	ADDITIONAL INFORMATION	OPTIONS
<p>This beautiful hand crafted outdoor wall light is made of all authentic hand forged wrought iron. All our fixtures are hand painted and available in any of our finish options. This fixture is perfect for garage lighting, outdoor walls, backyard and patio lighting.</p> <p>Total Fixture Dimensions: Height: 41" Width: 12" Extension: 12" Cage Dimensions: Height: 12" Width: 8" - HCO: 18" Back Plate: 7"H x 5"W Weight: 17 LBS Uses 1 medium base LED bulbs E26, up to 15W LED each, dimmable (bulbs not included)</p>		

TYPE L10

SPECIFICATIONS

DESCRIPTION:

Combed surface mount MR16 accent light.
Suitable for wet/damp/typical location installations.

MATERIAL:

Standard overall material is 6061 aluminum.
HL-336 - Machined Aluminum (standard)
HL-336-29 - Machined Brass
HL-336-T - Machined Stainless Steel

FINISH:

AA - Anodized Satin Aluminum
AP - Powder Coat Aluminum
BK - Powder Coat Black
BZ - Powder Coat Bronze
WT - Powder Coat White
N - Natural Brass or Stainless

Architect to confirm

HALOGEN LAMPING OPTION:

Lamp Type - 12V halogen MR16 lamp, pin GX-35 base, 50W max, not included (standard)

LED OPTIONS

Integrate high output LED, warm white 85 CRI (90 available)
2700K or 3000K Standard (6000K, 5000K, & 6500K available)

SLED - 3W LED - 180 lumens

ILED - 8W LED - 380 lumens

BLEDE - 6-W LED - 565 lumens

OPTICS

3LED and BLEDE:

SP - Spot, 12°

SP - Narrow Flood, 24°

FL - Flood, 36°

BLEDE:

SP - Spot 14°

SP - Narrow Flood, 26°

MF - Medium Flood, 30°

FL - Flood, 42°

VOLTAGE:

12 - 12 VAC output transformer required, not included.

MOUNTING:

Fixture is compatible with a fixed 1/2" NPS mount.

OPTIONS:

Glass shades

GL-10 - Short Angled, aluminum

GL-11 - Angled, aluminum

GL-13 - Straight, aluminum

Lenses/Louvers/Color Filters

LA-1 - Hexcell Louver (Black)

LA-2 - Phosphor Glass

LA-3 - Linear spread lens

LA-4 - Soft Focus lens (diffused)

LA-5 - Moonlight lens

LA-6 - Blue lens

See fixture accessories for more information.

RATING:

Wet/damp/typical location.

MADE IN THE USA

ORDER SPECIFICATION:

Fixture _____ Finish _____ Latching _____ Voltage _____ Options/Access _____

PROJECT:

APPROVED:

NOTE:

TYPE:

HEVI LITE, INC.

9714 Variel Ave, Chatsworth, CA 91311

Tel. (818) 341-8391 • Fax (818) 896-1886


Web Site <http://www.hevilitelighting.com>

CATALOG NUMBER:

HL-336

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HEVI LITE, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HEVI LITE, INC. IS PROHIBITED.

TYPE L11 (SHOWN FOR DESIGN INTENT)



Sale Price: \$499.00


Regular Price: \$549.00

SKU 7260-1

Tuscan-Spanish Style Outdoor Lighting/ Fixture

Light's Of Turkey®

Pick over for zoom

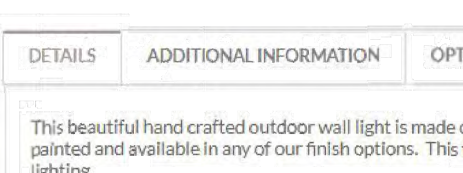

DETAILS	ADDITIONAL INFORMATION	OPTIONS
<p>This beautiful hand crafted outdoor wall light is made of all authentic: hand forged wrought iron. All our fixtures are hand painted and available in any of our finish options. This fixture is perfect for garage lighting, outdoor walls, backyard and patio lighting.</p> <p>Total Fixture Dimension: Height: 26" Width: 8" Extension: 10"</p> <p>Cage Dimension: Height: 14" Width: 8" HCO: 14"</p> <p>Back Plate: 20"H x 4.5"W Weight: 12 LBS</p> <p>Uses 1 medium base LED bulbs E26, up to 15W LED each, dimmable (Bulbs not included)</p>		

TYPE L12

FILIX
FILIX LIGHTING

Snake Deco

Specification Sheet

**UL STD 1508
IP67**

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Recessed floor installation
- Gravel, soil or concrete
- UL STD 1508, IP67, Wet location, drive over rated 1500 kg (3300lb)

Performance

- 90°C, terminated & tempered glass
- Continuous run
- Radius, min R 356mm (12.4')
- Tempered glass 241mm (9.5") thick
- Stainless steel type 304 construction
- Direct connection pour ABS installation housing
- Snap in installation with no exposed hardware
- Selective current protection (installation housing)
- Lifetime TM-21 @85C L80B10K+@5000h
- Supplied with oil and water resistant 0.5mm (7") feed cable as standard
- CR: > 85
- 3 Step Macadam

Safety

- Remote power supply
- Low voltage operation
- Recessed installation

Sustainability

- Recyclable material

Installation housing

- SN335

Cable options IP67 connectors

Jumper Cable

- 104387 - L= 1m (3.2') single color

Laid Cable

- 104089 - L= 1m (3.2') single color
- 104891 - ENDCAP M2X1.5 MALE

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

Click [here](#) to download fixture installation manual.
Click [here](#) to download housing installation manual.
Click [here](#) to download CAD file.
Click [here](#) to download IES-LID data.









FILIX

lighting.com sales@lighting.com

Filix reserves the right to make technical changes without notice.

Snake Deco

ORDERING INFORMATION

	MODEL	SND	
	LENGTH	100	• 121mm (4.8")
	POWER	H	• H - 2.3W, 2700K - 3000K, 80lm
	COLOR TEMP.	27	• 27 - 2700K
		30	• 30 - 3000K
	OPTICS	SP	• SP - Spot - 17°
		FL	• FL - Flood - 31°
	VOLTAGE	24	• 24 - 24Vdc fixture voltage



*Min order quantity 8pcs
*Max run from single feed 7m (23')

FILIX

TYPE L13

[illegible]

TYPE L14

Wall luminaire - Narrow beam upward - Narrow beam downward		BEGA													
Application Wall luminaires with directed narrow beam light distribution on both sides. Arranged individually or in groups, they are great design elements for all types of lighting applications.		Type: BEGA Product: Project: Modified:													
Materials Clear safety glass Marine grade, copper free (≥0.3% copper content) A860 0 aluminum alloy High temperature silicone gasket Mechanically anodized stainless steel fasteners Pure anodized aluminum reflector NRTL tested to North American Standards, suitable for wet locations Protection class IP 65															
Weight: 8.8 lbs.															
Electrical Operating voltage 120-277V AC Minimum start temperature <30°C LED module voltage 24.2V System voltage 28.0V Connectability 0-10V dimmable Color rendering index Ra > 80 Luminaire lifetime 22,000 hrs LED service life (L70) 60,000 hrs															
LED color temperature <input type="checkbox"/> 4000K (K4) <input type="checkbox"/> 3500K (K36) <input checked="" type="checkbox"/> 3000K (K27)		Available options <input type="checkbox"/> OUS Custom finish <input type="checkbox"/> FSC Fusing <input type="checkbox"/> MAGU Marine grade undercoat <input type="checkbox"/> RAL RAL finish													
BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details.		Available accessories <input type="checkbox"/> BT6547 Surface mounted wiring box See individual accessory spec sheet for details.													
Finish All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidirect finish provides superior frost protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL and custom color finishes provided in either polyester powder or liquid paint.		Available for pre-shipment <input type="checkbox"/> BT6537 Narrow opening wiring box													
Available colors <input type="checkbox"/> Black (BL0) <input type="checkbox"/> Silver (SLV) <input type="checkbox"/> RAL <input type="checkbox"/> Bronze (BRZ) <input type="checkbox"/> White (WHT) <input type="checkbox"/> OUS															
															
Wall luminaire - Narrow beam upward - Narrow beam downward															
<table border="1"> <thead> <tr> <th></th><th>LED</th><th>A</th><th>B</th><th>C</th><th>D₁</th></tr> </thead> <tbody> <tr> <td>BT6008</td><td>24.2W</td><td>18"</td><td>4 1/2"</td><td>16 1/2"</td><td>6 1/4"</td></tr> </tbody> </table>			LED	A	B	C	D ₁	BT6008	24.2W	18"	4 1/2"	16 1/2"	6 1/4"		
	LED	A	B	C	D ₁										
BT6008	24.2W	18"	4 1/2"	16 1/2"	6 1/4"										
BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 841-0533 info@bega-us.com		<small>BECA is a leader in lighting products and the associated accessories. Luminaire data on this sheet is subject to change at the discretion of BEGA North America. For the most current technical data, please visit us at bega-us.com. © copyright BEGA 2021</small>													

120 Broadway
20th Floor
New York, NY,
212 770 2800
beyerblinderbelle.com

85 Banyan Blvd
West Palm Beach
Florida 33401
561.684.6844
spinaourke.com

SPINAOROURKE
+ PARTNERS

Architecture • Interior Design


**The Society of the Four Arts -
John E. Rovensky Building
100 Four Arts Plaza, Palm Beach, FL 33480**

THESE DRAWINGS ARE FOR THE EXCLUSIVE USE OF SPINA OROURKE + PARTNERS, INC. AND MAY NOT BE DUPLICATED, REPRODUCED OR USED IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SPINA OROURKE + PARTNERS, INC. ALL RIGHTS RESERVED

Revisions:

Landmarks Resubmission 2024.12.30

Project no: 2953
Date: 2024.10.07
Drawn by: Flux Studio
Project Manager: FC



LT.2.4

Final Submittal