


This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.

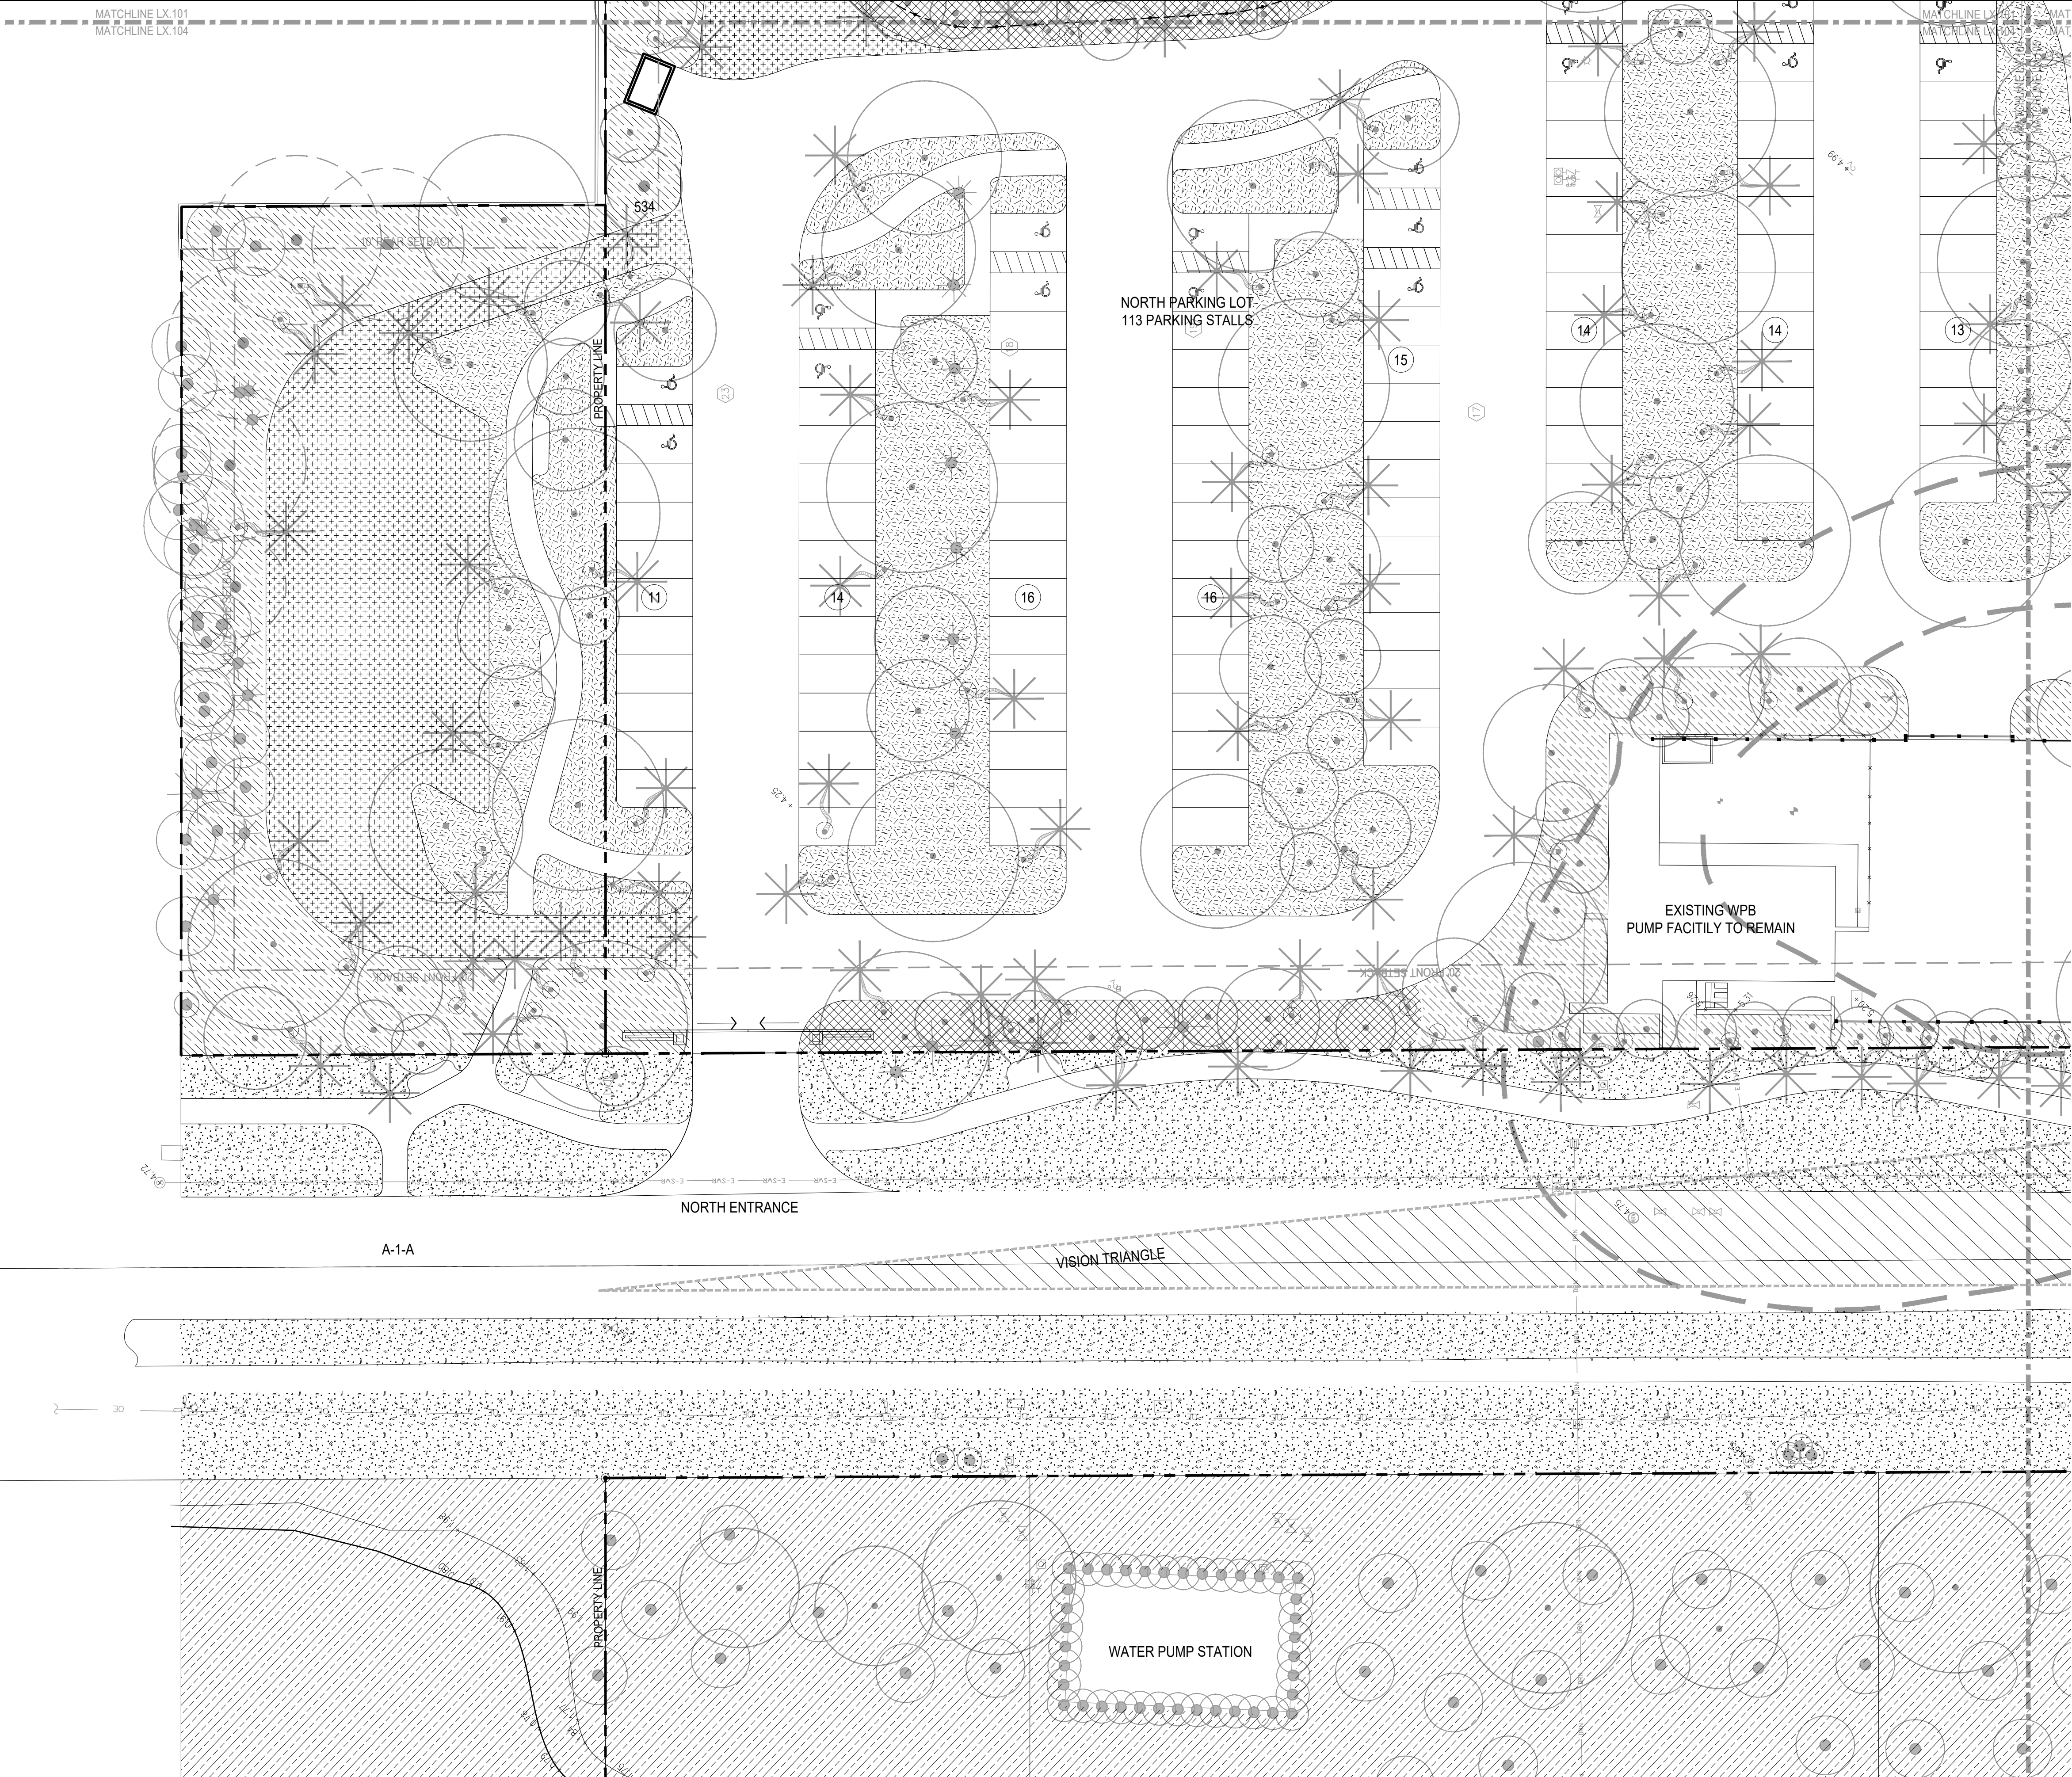

LEGEND


PROPERTY LINE
SETBACK
COASTAL CONSTRUCTION CONTROL LINE

VEGETATION LEGEND

- DUNE - PIONEER OPEN SAND
- DUNE - FACE
- COASTAL STRAND - PRICKLY ZONE
- COASTAL STRAND - WINDBREAK
- COASTAL STRAND - OPEN COS
- MARITIME HAMMOCK
- GRASS
- MARITIME HAMMOCK - EDGE
- WILDFLOWER GARDEN
- MARITIME HAMMOCK - BUFFER
- INTERDUNAL SWALE
- GRASS - STABILIZED
- RAINGARDENS
- MARITIME HAMMOCK - WEST

GENERAL NOTES:

- CONTRACTOR IS RESPONSIBLE FOR CALCULATING / VERIFYING ALL QUANTITIES.
- GENERAL CONTRACTOR SHALL SUBMIT, OBTAIN AND KEEP RECORDS OF ALL PERMITTING REQUIRED BY LOCAL CODES.
- ALL PLANT MATERIAL ARE TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PROCUREMENT.
- ALL PLANT MATERIALS AND ELEMENTS LOCATION / LAYOUT SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION. LANDSCAPE ARCHITECT SHALL BE PROVIDED 3 WEEKS NOTIFICATION IN ADVANCE OF LAYOUT WORK, TO APPROVE ON-SITE FORM WORK, PRIOR TO FABRICATION.
- REFER TO SHEET LP.300 FOR PLANTING SCHEDULE.
- ALL UNDERGROUND UTILITIES SHALL BE VERIFIED IN FILED BY GENERAL CONTRACTOR PRIOR TO TREE AND PALM INSTALLATION.
- ALL NEW UNDERGROUND UTILITIES SHALL BE COORDINATED WITH LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS
NEW YORK • PALM BEACH
FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY


CHECKED BY

UNDERSTORY PLAN
NORTHWEST



**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER
LP.204

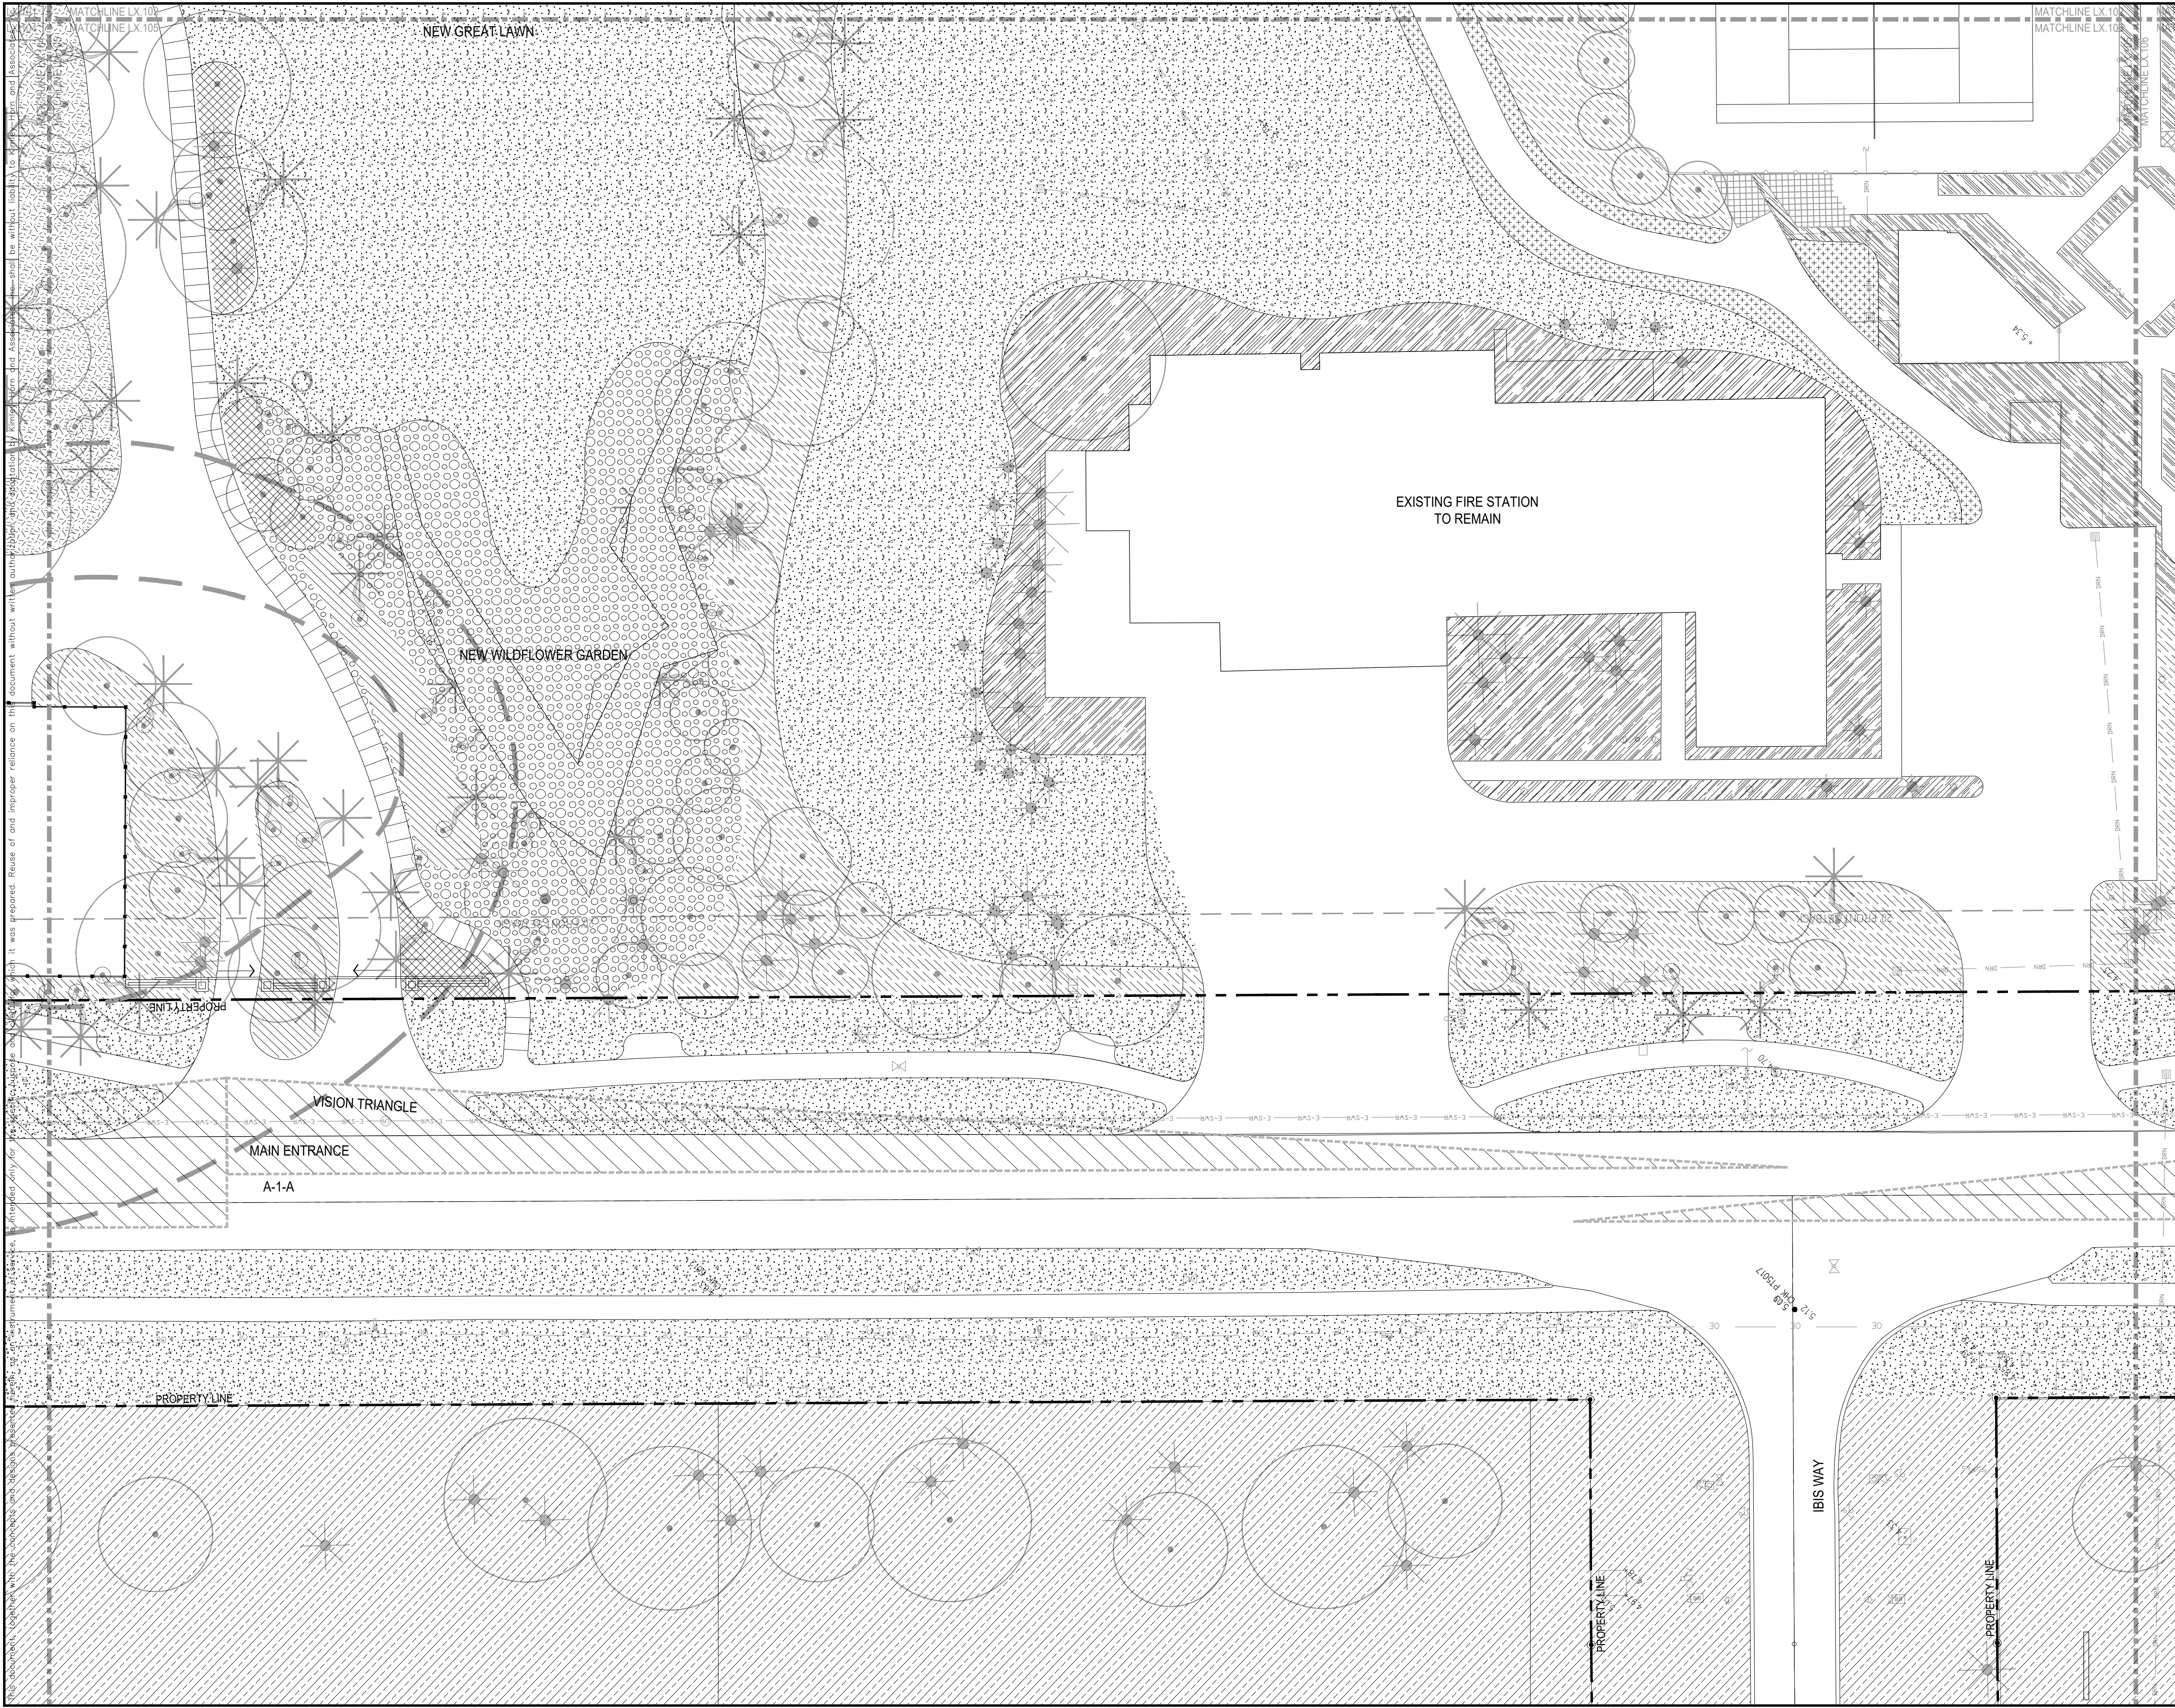


LEGEND

- PROPERTY LINE
SETBACK
COASTAL CONSTRUCTION CONTROL LINE

- VEGETATION LEGEND
- DUNE - PIONEER OPEN SAND
 - DUNE - FACE
 - COASTAL STRAND - PRICKLY ZONE
 - COASTAL STRAND - WINDBREAK
 - COASTAL STRAND - OPEN COS
 - MARITIME HAMMOCK
 - GRASS
 - MARITIME HAMMOCK - EDGE
 - WILDFLOWER GARDEN
 - MARITIME HAMMOCK - BUFFER
 - INTERDUNAL SWALE
 - GRASS - STABILIZED
 - RAINGARDENS
 - MARITIME HAMMOCK - WEST

GENERAL NOTES:

- CONTRACTOR IS RESPONSIBLE FOR CALCULATING / VERIFYING ALL QUANTITIES.
- GENERAL CONTRACTOR SHALL SUBMIT, OBTAIN AND KEEP RECORDS OF ALL PERMITTING REQUIRED BY LOCAL CODES.
- ALL PLANT MATERIAL ARE TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PROCUREMENT.
- ALL PLANT MATERIALS AND ELEMENTS LOCATION / LAYOUT SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION. LANDSCAPE ARCHITECT SHALL BE PROVIDED 3 WEEKS NOTIFICATION IN ADVANCE OF LAYOUT WORK, TO APPROVE ON-SITE FORM WORK, PRIOR TO FABRICATION.
- REFER TO SHEET LP.300 FOR PLANTING SCHEDULE.
- ALL UNDERGROUND UTILITIES SHALL BE VERIFIED IN FILED BY GENERAL CONTRACTOR PRIOR TO TREE AND PALM INSTALLATION.
- ALL NEW UNDERGROUND UTILITIES SHALL BE COORDINATED WITH LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.

2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No. REVISIONS DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY


CHECKED BY

UNDERSTORY PLAN
CENTER WEST



**PHIPPS OCEAN
PARK**
PREPARED FOR
**TOWN OF PALM
BEACH**

SHEET NUMBER
LP.205

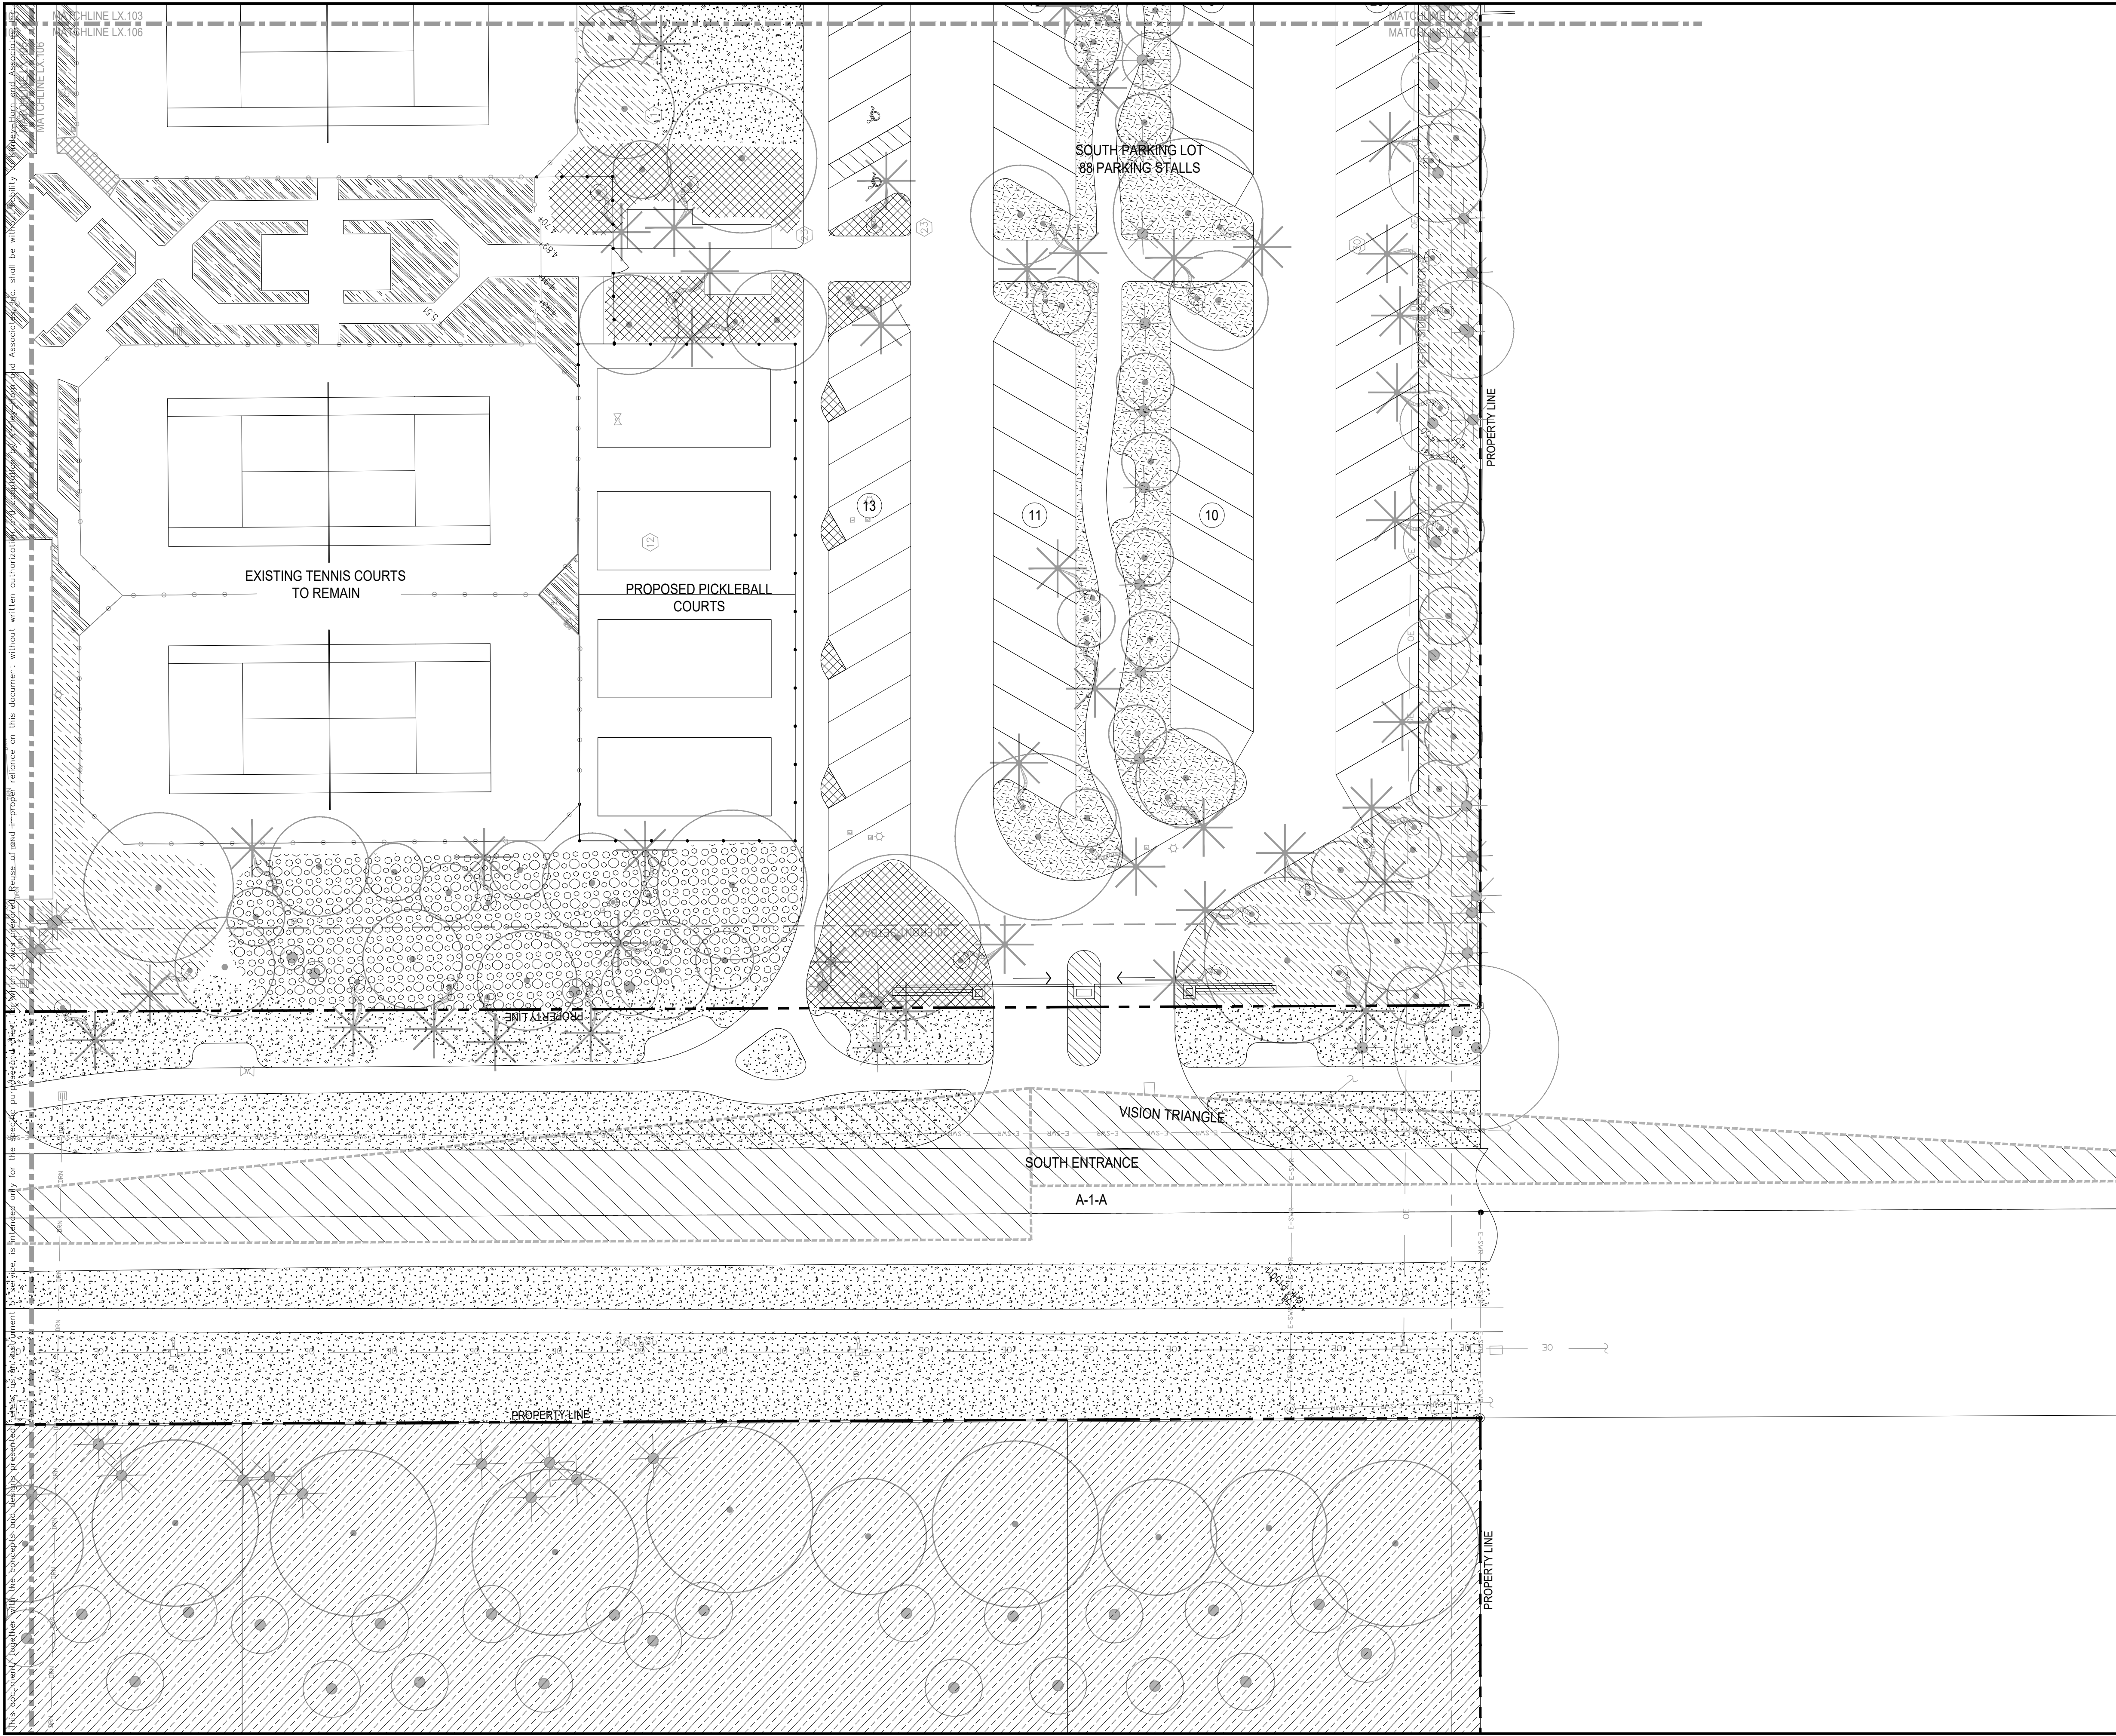

LEGEND


- PROPERTY LINE
SETBACK
COASTAL CONSTRUCTION CONTROL LINE

VEGETATION LEGEND

- DUNE - PIONEER OPEN SAND
DUNE - FACE
COASTAL STRAND - PRICKLY ZONE
COASTAL STRAND - WINDBREAK
COASTAL STRAND - OPEN COS
MARITIME HAMMOCK
GRASS
MARITIME HAMMOCK - EDGE
WILDFLOWER GARDEN
MARITIME HAMMOCK - BUFFER
INTERDUNAL SWALE
GRASS - STABILIZED
RAINGARDENS
MARITIME HAMMOCK - WEST

GENERAL NOTES:

- CONTRACTOR IS RESPONSIBLE FOR CALCULATING / VERIFYING ALL QUANTITIES.
- GENERAL CONTRACTOR SHALL SUBMIT, OBTAIN AND KEEP RECORDS OF ALL PERMITTING REQUIRED BY LOCAL CODES.
- ALL PLANT MATERIAL ARE TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PROCUREMENT.
- ALL PLANT MATERIALS AND ELEMENTS LOCATION / LAYOUT SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION. LANDSCAPE ARCHITECT SHALL BE PROVIDED 3 WEEKS NOTIFICATION IN ADVANCE OF LAYOUT WORK, TO APPROVE ON-SITE FORM WORK, PRIOR TO FABRICATION.
- REFER TO SHEET LP.300 FOR PLANTING SCHEDULE.
- ALL UNDERGROUND UTILITIES SHALL BE VERIFIED IN FILED BY GENERAL CONTRACTOR PRIOR TO TREE AND PALM INSTALLATION.
- ALL NEW UNDERGROUND UTILITIES SHALL BE COORDINATED WITH LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE
-----	-----------	------



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY

CHECKED BY


UNDERSTORY PLAN
SOUTHWEST




**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER
LP.206


This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.

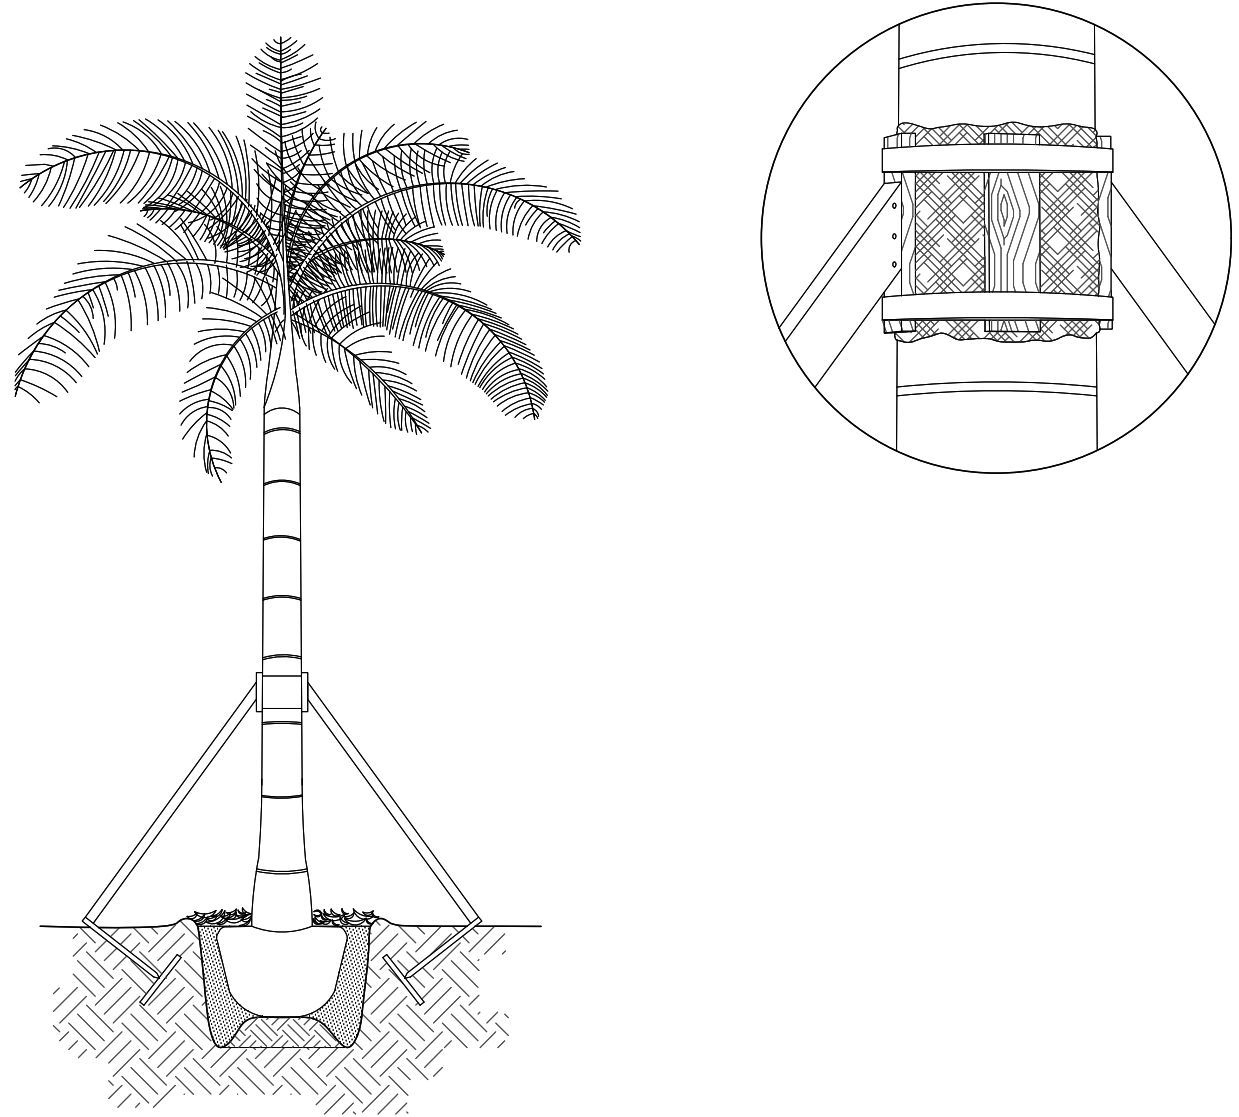


1 PALM PLANTING AND STAKING DETAIL
SCALE: N/A

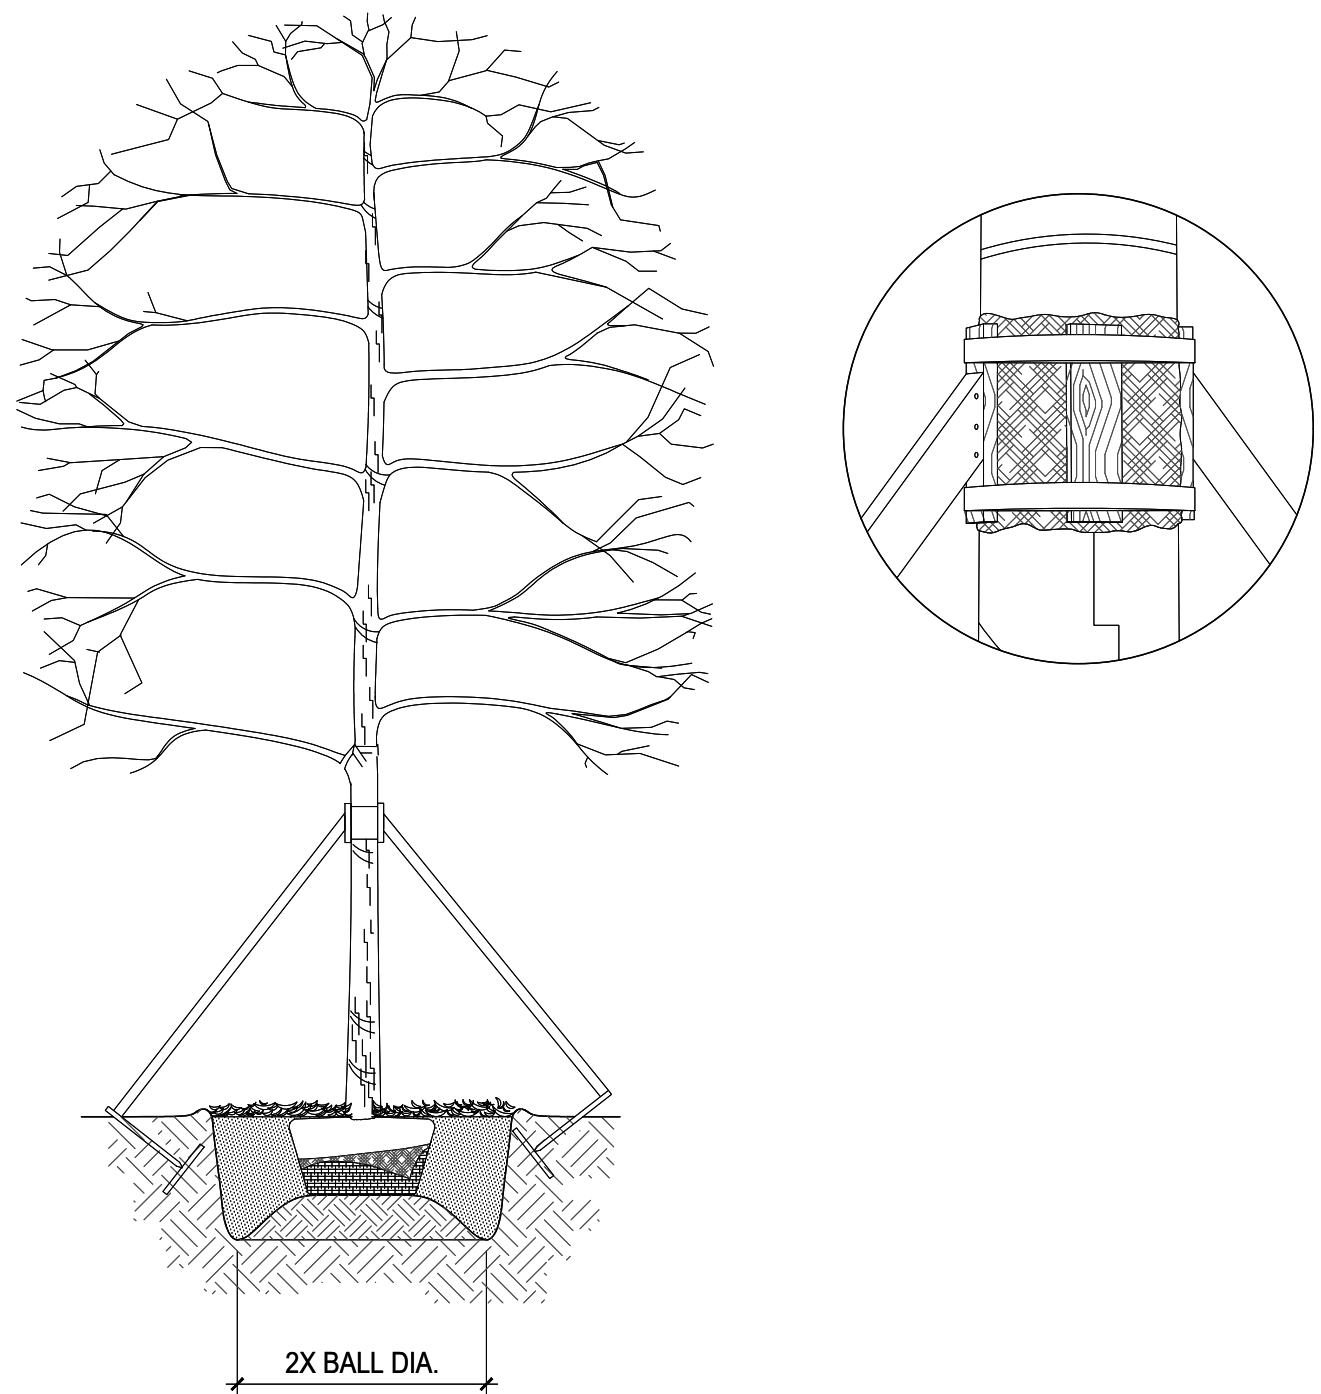


5 TREE PLANTING AND STAKING DETAIL
SCALE: N/A

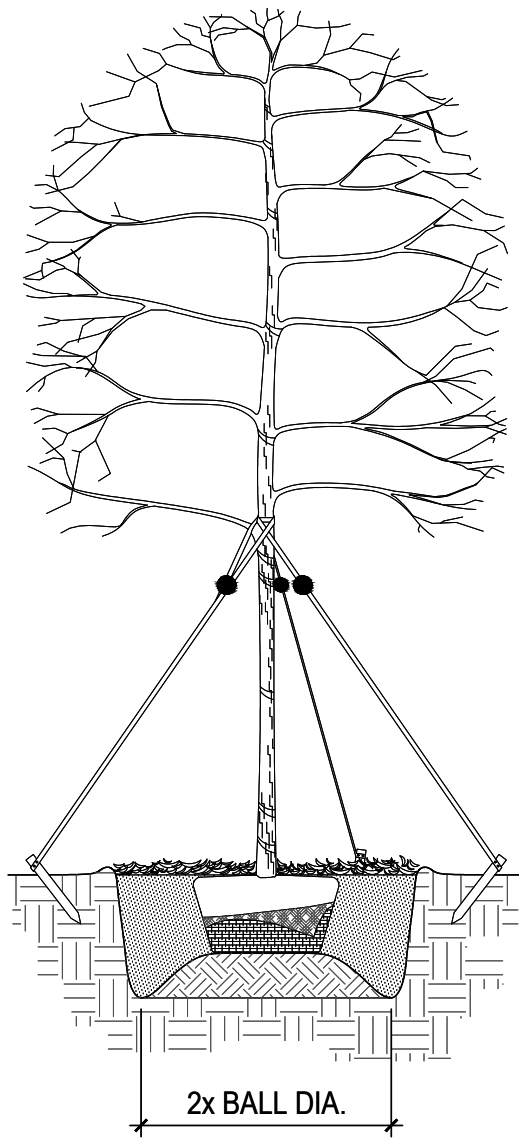


2 UNDERSTORY TREE PLANTING AND STAKING DETAIL
SCALE: N/A

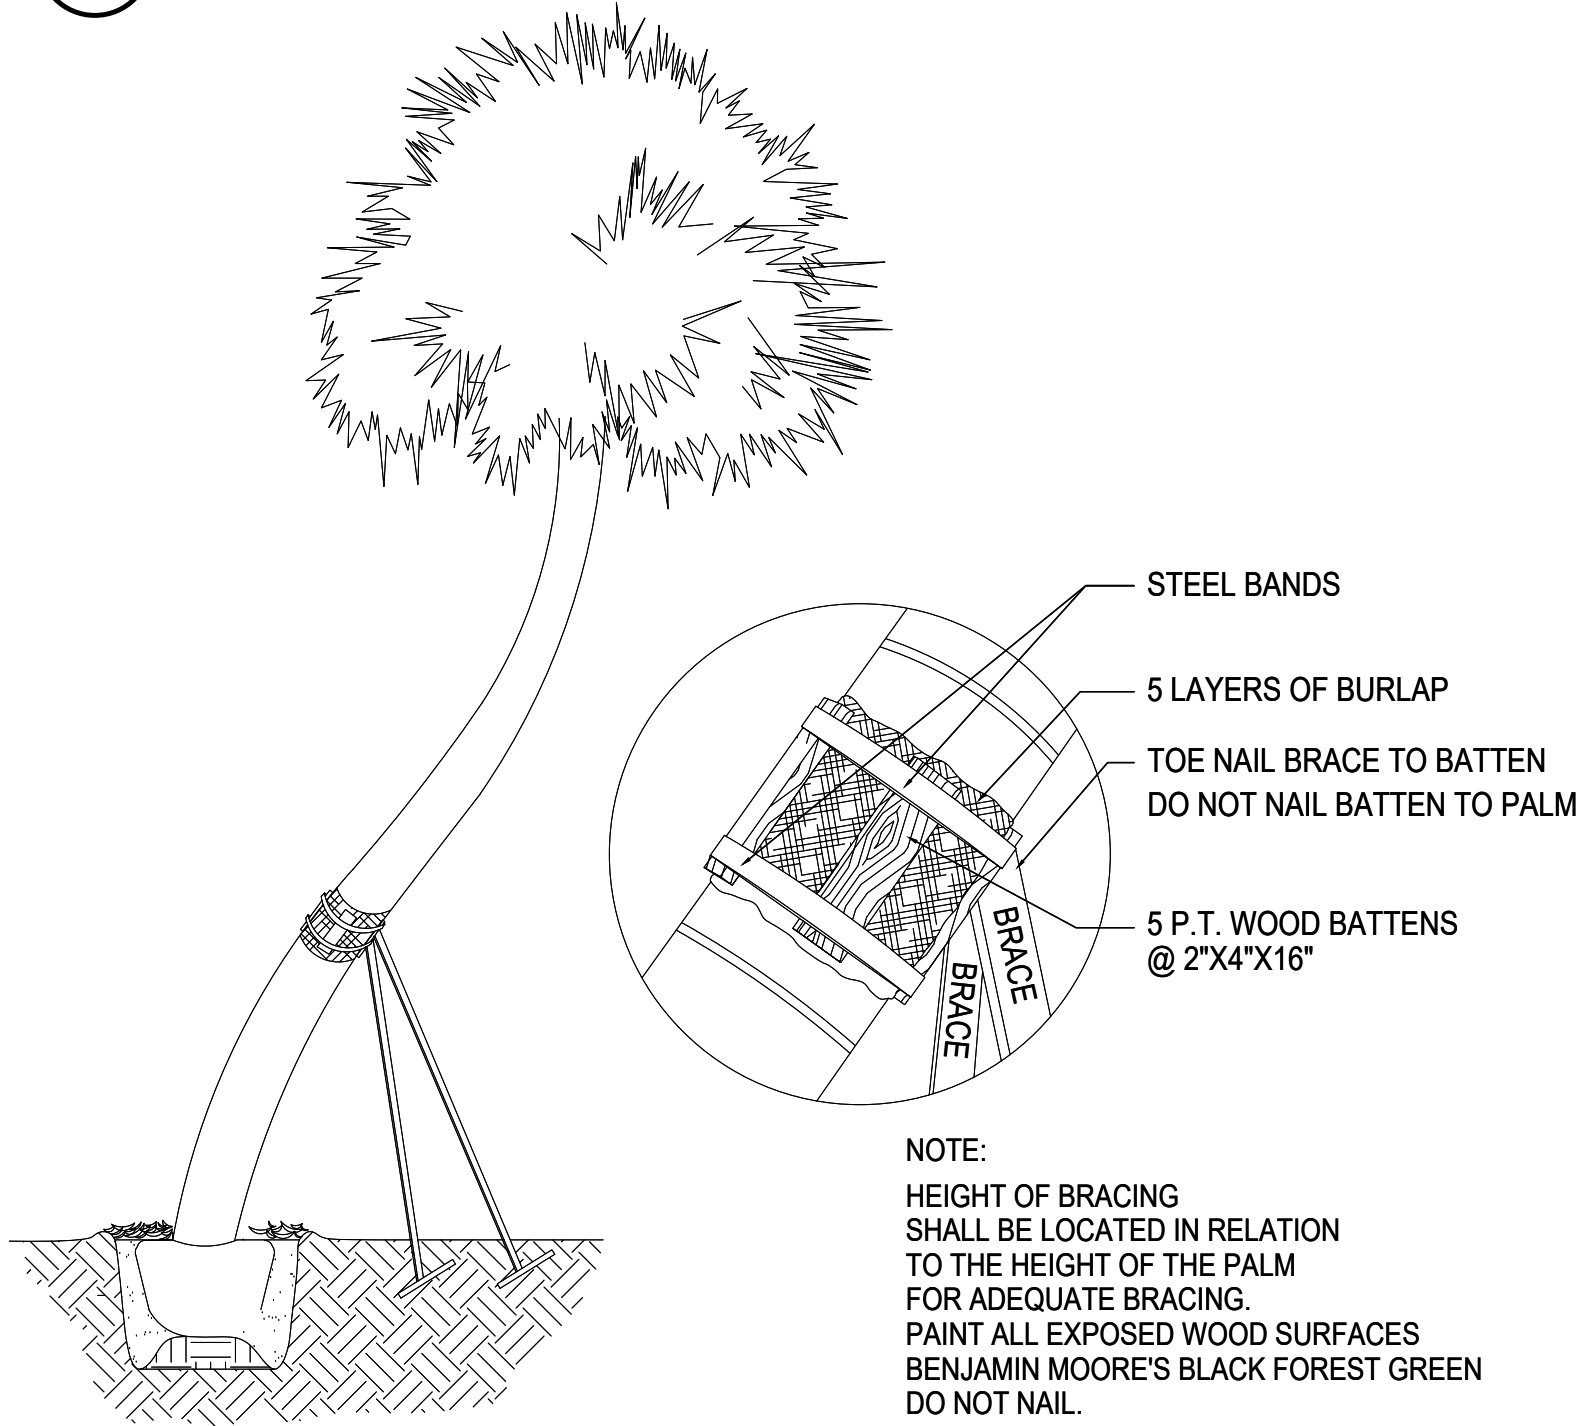


6 CHARACTER PALM PLANTING AND STAKING DETAILS
SCALE: N/A

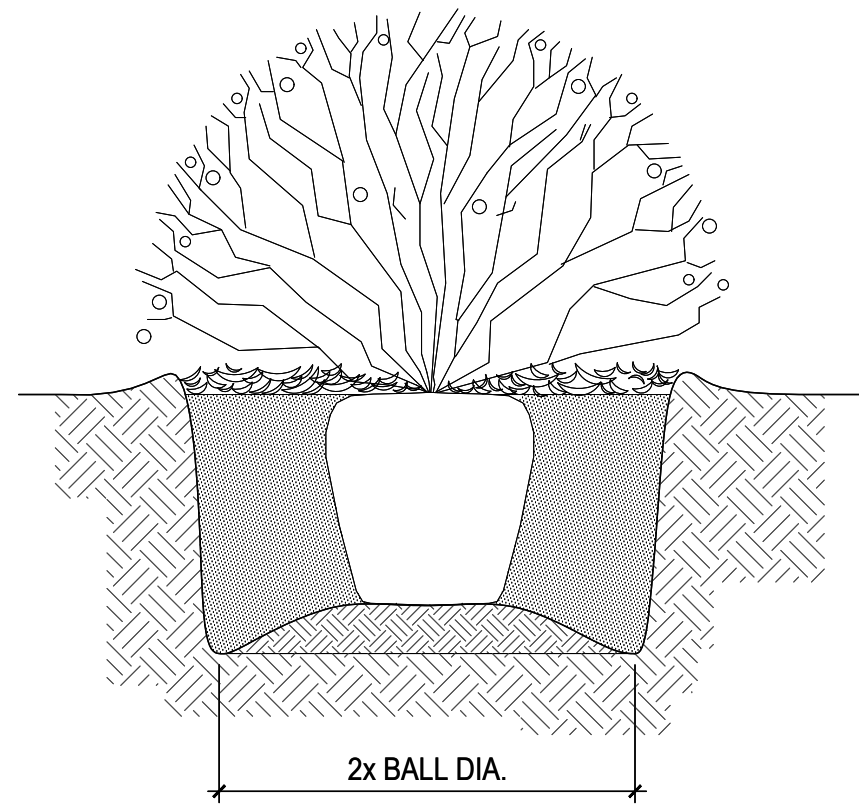

3 SHRUB PLANTING DETAIL
SCALE: N/A

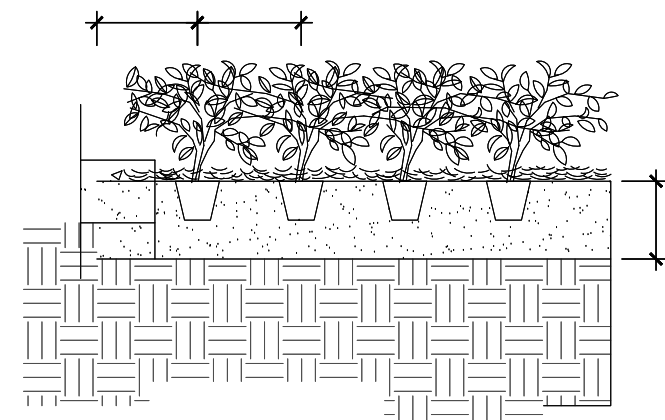

4 GROUND COVER PLANTING DETAIL
SCALE: N/A

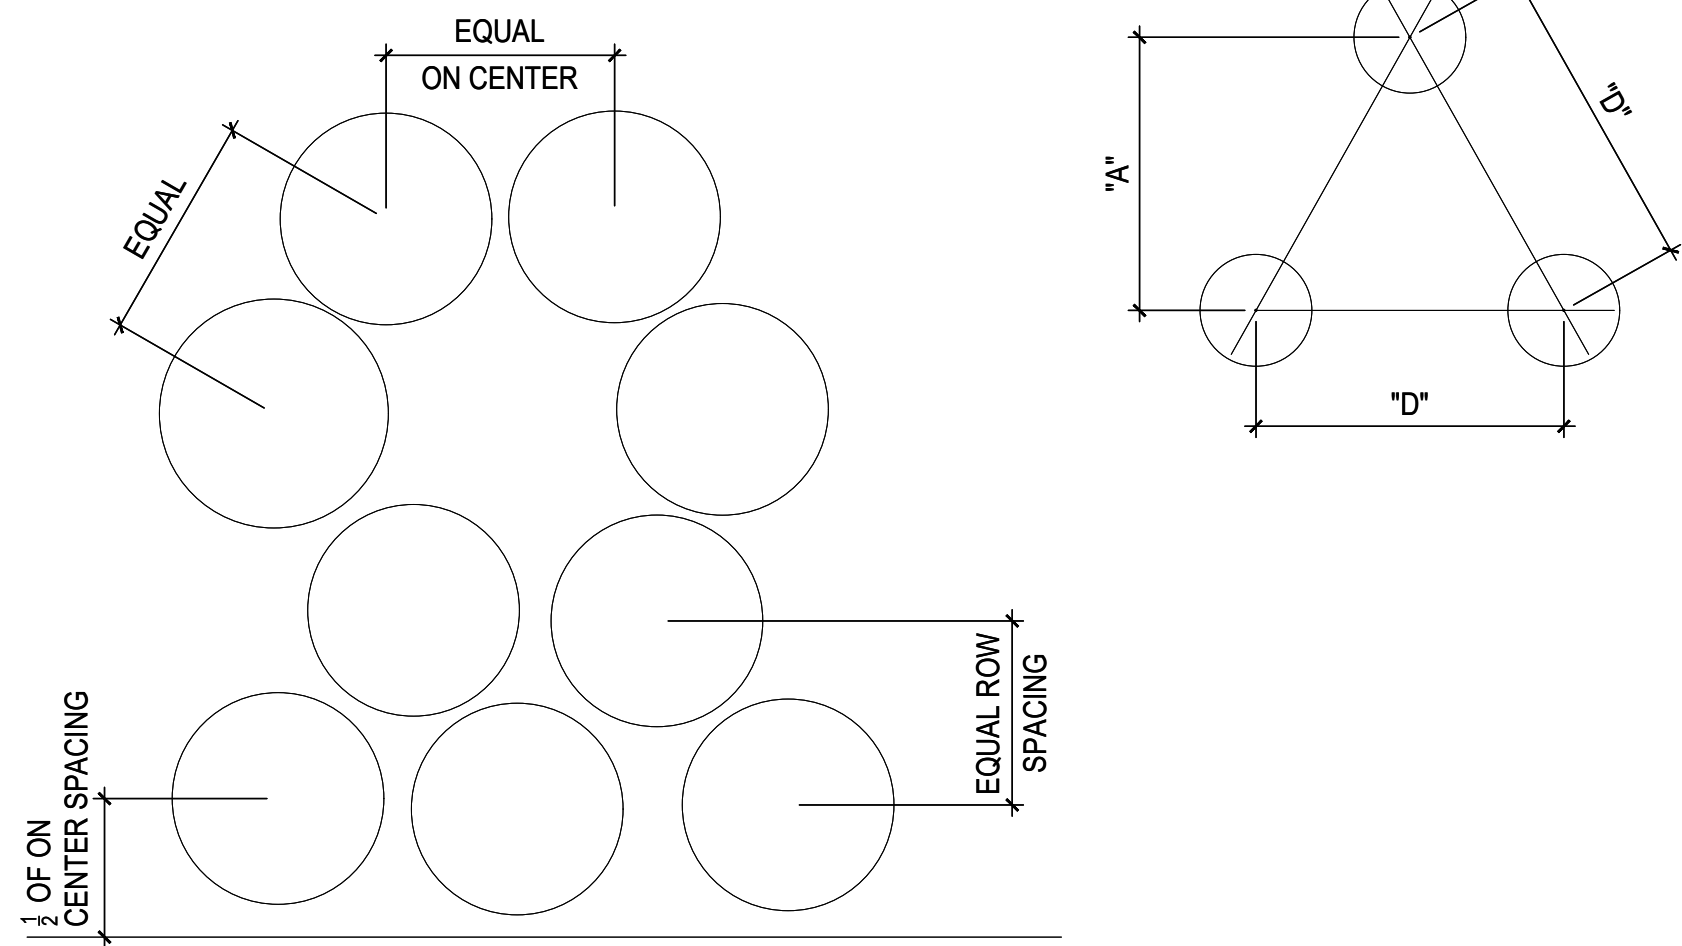

7 PLANT & SHRUB SPACING DETAIL
SCALE: N/A

CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591


LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY

CHECKED BY

PLANTING DETAILS



**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER
LP.400

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.

GENERAL LANDSCAPE NOTES AND SPECIFICATIONS

1. LANDSCAPE CONTRACTOR SHALL BECOME FAMILIAR WITH THE SCOPE OF WORK AS WELL AS THE SITE, DIGGING CONDITIONS, AND ANY OBSTACLES PRIOR TO SUBMITTING A BID.

2. LANDSCAPE CONTRACTOR SHALL PROVIDE AN INSTALLATION SCHEDULE TO THE GENERAL CONTRACTOR AND LANDSCAPE ARCHITECT FOR REVIEW AND APPROVAL.

3. LANDSCAPE CONTRACTOR SHOULD VERIFY ALL ESTIMATED QUANTITIES OF MATERIAL SHOWN ON THE LANDSCAPE ARCHITECT'S DRAWINGS PRIOR TO SUBMITTING A BID.

4. PLANT LIST SHALL TAKE PRECEDENCE OVER PLANTING PLAN IN CASE OF DISCREPANCIES.

5. ALL PLANT MATERIAL SYMBOLS SHOWN ON LANDSCAPE PLANS SHALL BE CONSIDERED DIAGRAMMATIC AND SHOULD BE ADJUSTED IN THE FIELD BY LANDSCAPE CONTRACTOR TO AVOID ALL UTILITIES AND ALL OTHER OBSTRUCTIONS, AFTER CONSULTING THE LANDSCAPE ARCHITECT.

6. ALL SIZES SPECIFIED FOR PLANT MATERIAL ON THE PLAN AND PLANT LIST SHALL BE CONSIDERED MINIMUM.

7. ALL PLANT MATERIAL MUST MEET OR EXCEED THE SPECIFIED MINIMUM REQUIREMENTS FOR BOTH HEIGHT AND SPREAD.

8. ANY SPECIFIC REQUIREMENTS SUCH AS SPECIFIC SHAPE, CHARACTER, NUMBER OF TREE TRUNKS, PLANT SOURCE, TRANSPORTING, AND OR SPECIAL BRACING NOTED ON THE PLAN OR PLANT LIST, WILL REQUIRE APPROVAL AND OR COORDINATION WITH THE LANDSCAPE ARCHITECT.

9. NO CHANGE OR SUBSTITUTION SHALL BE MADE WITHOUT PRIOR APPROVAL OF THE LANDSCAPE ARCHITECT. ANY REVISION OR MODIFICATIONS TO THE LANDSCAPE PLAN MUST HAVE PRIOR APPROVAL BY THE THE LANDSCAPE ARCHITECT & OWNER

10. ALL MATERIAL SHALL BE SUBJECT TO AVAILABILITY AT TIME OF INSTALLATION. SUBSTITUTIONS MAY BE MADE AFTER CONSULTATION WITH THE LANDSCAPE ARCHITECT.

11. ALL TREES, PALMS, SHRUBS AND GROUND COVERS SHALL BE GUARANTEED FOR A PERIOD OF 12 MONTHS FROM DATE OF FINAL ACCEPTANCE.

12. CHANGES MAY OCCUR DURING THE NORMAL COURSE OF IMPLEMENTATION. VERBAL CHANGE ORDERS WILL NOT BE HONORED. ANY CHANGES MUST BE SUBMITTED TO THE LANDSCAPE ARCHITECT IN WRITING AS A CHANGE ORDER TO BE REVIEWED AND APPROVED IN WRITING BY OWNER/CLIENT.

13. LANDSCAPE CONTRACTOR SHALL LOCATE AND VERIFY ALL UNDERGROUND UTILITIES OR STRUCTURES PRIOR TO DIGGING. LANDSCAPE CONTRACTOR SHALL REPAIR ALL DAMAGES TO UNDERGROUND UTILITIES, AND OR CONSTRUCTION CAUSED BY LANDSCAPE INSTALLATION, AT NO COST TO THE OWNER.

14. LANDSCAPE CONTRACTOR SHALL COORDINATE WITH THE GENERAL CONTRACTOR, THE REMOVAL OF ALL BUILDING CONSTRUCTION DEBRIS AND FOREIGN MATERIAL PRIOR TO INSTALLATION OF ANY PLANT MATERIAL.

15. SITE PREPARATION SHOULD INCLUDE THE ERADICATION AND REMOVAL OF ANY WEEDS OR GRASS, REMOVAL AND CLEAN UP OF ANY DEAD MATERIAL AND ROUGH AND FINISH GRADING PER SPECS AND OR LANDSCAPE PLANS.

16. FOR PLANT MATERIAL DESIGNATED TO BE REMOVED, THE ENTIRE ROOT SYSTEM SHALL BE DUG AND REMOVED FROM THE SITE.

17. ALL PLANTING AREAS SHALL BE EXCAVATED TO A MINIMUM OF 3' FOR GROUND COVER'S AND MORE THAN 3' FOR SHRUBS, TREES, AND PALMS, AND SHOULD RECEIVE AN 80/20 MIX FILL SOIL. SAND USED IN PLANTING SOIL MIX SHALL BE SILICA SAND.
18. ALL PLANT MATERIAL SHALL BE FLORIDA NO. 1 OR BETTER AS SET FORTH IN THE FLORIDA DEPARTMENT OF AGRICULTURE 'GRADES AND STANDARDS FOR NURSERY PLANTS' SECOND EDITION FEB. 1998 INCLUDING REVISIONS AND WHICH MEET OR EXCEED THE SIZES INDICATED IN THE PLANTING SCHEDULE AND DETAILS.

19. ALL TREES SHALL BE STAKED IN A GOOD WORKMANLIKE MANNER. NO NAIL STAKING PERMITTED. (REFER TO BRACING NOTES AND PLANTING DETAILS)

20. AFTER REMOVAL OR RELOCATION OF EXISTING TREES AND PALMS, ALL REMAINING HOLES SHALL BE BACK FILLED AROUND AND UNDER ROOT BALL WITH WASHED BEACH SAND. SOD DISTURBED AREA, IF REQUIRED. ALL SHRUB BEDS TO BE INSTALLED WITH WASHED BEACH SAND. (SEE SPEC)

21. ALL TREES, PALMS, SHRUBS AND GROUND COVER PLANTS SHALL BE FERTILIZED AT INSTALLATION, WITH LONG LASTING FERTILIZER, ACCORDING TO MANUFACTURERS' RECOMMENDATIONS AND BASED ON SOIL TESTS OF EXISTING ON-SITE SOILS.

22. ALL EXISTING PLANT MATERIAL TO REMAIN, SHALL BE PROTECTED DURING ALL CONSTRUCTION PHASES. ANY PLANT MATERIAL SCARRED OR DESTROYED DESIGNATED TO REMAIN MUST BE REPLACED AT THE CONTRACTOR'S EXPENSE WITH SIMILAR SPECIES SIZE AND QUALITY.

23. ALL TREES ON SOD AREA SHALL RECEIVE A HARDWOOD / PINE NEEDLE MULCH MIX RING 2' IN DIAMETER TYPICAL. MULCH TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PURCHASE AND/OR INSTALLATION.

24. ALL PLANTING AREAS SHALL BE MULCHED WITH SHREDDED ORGANIC MULCH TO A MINIMUM OF 3"; WITH THE EXCEPTION OF BEACH PLANTING. DO NOT USE CYPRESS OR RED MULCH.

25. ALL TREES SHALL HAVE 2" CALIPER AT D.B.H. MINIMUM FOR A 10' HEIGHT TREE, UNLESS NOTED OTHERWISE.

26. ALL 1 GALLON MATERIAL SHALL HAVE 12" SPREAD MINIMUM, ALL 3 GALLON MATERIAL TO HAVE 20-24" SPREAD MINIMUM.

27. ALL PLANTING AREAS WITHIN THE LIMITS OF WORK SHALL RECEIVE 100% COVERAGE BY AUTOMATIC IRRIGATION SYSTEM (DRIP PREFERRED) UNLESS OTHERWISE DIRECTED BY OWNER. SEE IRRIGATION PLANS FOR ADDITIONAL SPECIFICATIONS.

28. LANDSCAPE CONTRACTOR TO COORDINATE INSTALLATION OF IRRIGATION SYSTEM WITH IRRIGATION CONTRACTOR. IRRIGATION TIME CLOCK TO BE HARD WIRED ON COMPLETION - RESPONSIBILITY OF IRRIGATION CONTRACTOR. LANDSCAPE CONTRACTOR SHALL HAND WATER OR ARRANGE FOR WATERING DURING PLANTING UNTIL IRRIGATION SYSTEM IS 100% OPERABLE. THIS IS THE RESPONSIBILITY OF THE LANDSCAPE CONTRACTOR.

29. LANDSCAPE CONTRACTOR SHALL COORDINATE HIS WORK WITH ALL OTHER APPROPRIATE CONTRACTORS.

30. THE LANDSCAPE CONTRACTOR SHALL AT ALL TIMES KEEP THE JOB SITE CLEAN AND FREE FROM ACCUMULATION OF WASTE MATERIAL, DEBRIS, AND RUBBISH.

31. LANDSCAPE PLAN SHALL BE INSTALLED IN COMPLIANCE WITH ALL LOCAL CODES.

32. ON-SITE LAYOUT OF PLANT MATERIAL SHALL BE COORDINATED WITH LANDSCAPE ARCHITECT AT THE TIME OF INSTALLATION.

33. ALL PLANTS, MATERIALS, WORKMANSHIP, AND INVOICE APPROVAL ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT.

34. CONTRACTOR TO FLAG ALL PROPOSED TREE AND PALM LOCATIONS FOR OWNER AND LANDSCAPE ARCHITECT'S APPROVAL PRIOR TO EXCAVATION OR INSTALLATION. PLAN LOCATIONS ARE SUBJECT TO FIELD ADJUSTMENTS BY THE LANDSCAPE ARCHITECT.

35. LANDSCAPE ARCHITECT TO APPROVE ALL SHRUB AND GROUND COVER PLANTING LOCATION AND LAYOUT PRIOR TO INSTALLATION.

36. CONTRACTOR SHALL PROVIDE DIGITAL PHOTOGRAPHIC DOCUMENTATION DURING INSTALLATION FOR LANDSCAPE ARCHITECT'S REVIEW, DAILEY.

37. LANDSCAPE CONTRACTOR TO INSURE ALL PLANT MATERIAL IS INSTALLED AT THE CORRECT ELEVATION, REFER TO GRADING PLAN.

38. THE LANDSCAPE CONTRACTOR SHALL MAINTAIN OR COORDINATE WITH THE IRRIGATION CONTRACTOR AND LANDSCAPING MAINTENANCE SERVICES ALL PLANTING INCLUDING WATERING, MOWING, MULCHING, WEED, AND PEST CONTROL UNTIL FINAL ACCEPTANCE BY THE LANDSCAPE ARCHITECT AND OWNER.

39. THE AWARDED LANDSCAPE CONTRACTOR SHALL SUBMIT A PROPOSED BID / CONTRACT WITH PRICING FOR ALL PLANT MATERIAL INCLUDING (WARRANTY, LABOR, TRANSPORTATION, RELOCATION, SITE MAINTENANCE AND PREPARATION) AS PER THE LANDSCAPE ARCHITECT'S SPECIFICATIONS AND OR PLANTING PLANS.

40. THE LANDSCAPE CONTRACTOR'S CONTRACT SHALL ACKNOWLEDGE ALL TERMS AND CONDITIONS SET FORTH UNDER THESE GENERAL LANDSCAPE NOTES AND SPECIFICATIONS.

41. THESE DRAWINGS, DOCUMENTS, AND ALL CONTENTS ARE THE PROPERTY OF RAYMOND JUNGLES, INC. ALL RIGHTS ARE RESERVED. UNAUTHORIZED USE OR PRODUCTION, IN PART OR WHOLE, FOR ANY PURPOSE IS UNLAWFUL AND PROHIBITED EXCEPT BY EXPRESS WRITTEN CONSENT.

42. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ANY PERMITS OR APPROVALS FROM THE FEDERAL, STATE OR LOCAL GOVERNMENT REQUIRED FOR THE WORK INCLUDED IN THIS CONTRACT AND ON THESE DRAWINGS.

43. PLANT SHRUBS IN CIRCULAR PITS WITH A DIAMETER 16" GREATER THAN ROOTBALL OR CONTAINER. PLANT TREES IN CIRCULAR PITS WITH A DIAMETER 36" GREATER THAN ROOTBALL OR CONTAINER. PLACE PLANTS WITH BEST "FACE" FORWARD.

44. BACKFILL ALL PLANTING PITS WITH THE FOLLOWING MIXTURE ; ½ ONSITE SOIL, ½ CLEAN FRIABLE TOPSOIL. SUBMIT TOPSOIL SAMPLE AND SOIL TEST ANALYSIS FOR APPROVAL BY LANDSCAPE ARCHITECT, (SEE PLANTING DETAILS). REMOVE EXCESS SOIL EXCAVATED FROM PLANT PIT FROM THE SITE OR DISTRIBUTE ON-SITE AS DIRECTED BY L.A.

45. VERIFY ALL QUANTITIES IN THE PLANTING SCHEDULE AND INSTALL ALL PLANTS AND MATERIALS AS INDICATED IN THE PLAN. PROVIDE COMPOSITE UNIT PRICES FOR EACH PLANT, WHICH INCLUDE ALL OTHER INCIDENTAL MATERIALS, (I.E. MULCH, FERTILIZER, TOPSOIL, LABOR, ETC.)

46. NOTIFY THE OWNER AND LANDSCAPE ARCHITECT OF ANY UNFORESEEN CONDITIONS, I.E., COMPACTED SOIL / SUBGRADE, POOR DRAINAGE, UNCONSOLIDATED SOIL, EROSION, UTILITY CONFLICTS, EXCESSIVE SUN OR SHADE, ETC., PRIOR TO PROCEEDING WITH LANDSCAPE INSTALLATION.

47. ALL PLANTS, MATERIALS AND WORKMANSHIP ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT AND OWNER.

GENERAL TREE BRACING NOTES AND SPECIFICATIONS:

TREES AND PALMS GREATER THAN 6" DBH TO BE BRACED WITH PROPS:

1. CHOOSE THE CORRECT SIZE, LENGTH, AND NUMBER OF PROPS TO BE USED (PRESSURE TREATED (PT), TIMBER BAMBOO (GUADUA ANGUSTIFOLIA) 3" DIA.).

2. ALL (PRESSURE TREATED (PT) 2"x4", 4"x4"). STAKES SHALL BE PAINTED AS SPECIFIED BY THE LANDSCAPE ARCHITECT. WRAP AT LEAST 5 LAYERS OF BURLAP AROUND TRUNK OF THE PALM AT LEAST 4 INCHES WIDER THAN THE BATTENS BEING USED. BATTENS SHOULD BE MOUNTED AT A POINT 1/3 OF THE DISTANCE FROM GROUND TO THE CLEAR TRUNK OF THE TREE OR PALM, BUT NOT LESS THAN 4 FEET, WHICHEVER IS GREATER.

3. SELECT THE PROPER LENGTH AND SIZE OF BATTENS (PT 2"x4"x12'-16")

4. USE THE SAME NUMBER OF BATTENS AS PROPS BEING USED.

5. PLACE THE BATTENS VERTICALLY AND EVENLY SPACED AGAINST THE BURLAP.

6. SECURE THE BATTENS IN PLACE WITH METAL OR PLASTIC BANDING STRAPS. DO NOT NAIL TREE.

7. WEDGE LOWER END OF PROP INTO SOIL AND SECURE WITH A 2"x4"x30" STAKE. PROPS SHOULD BE INSTALLED AT A 30 TO 40 DEGREE ANGLE FROM THE BATTENS AND OF SUFFICIENT LENGTH TO REACH THE GROUND. NOTE: ON STRAIGHT TREES OR PALMS OR TREES, SPACE PROPS EQUAL DISTANCE AROUND TREE OR PALM ON CURVED (CHARACTER) PALMS OR TREES, SPACE PROPS AGAINST THE FRONT OF THE CURVE OF THE PALM.

8. CUT A SMOOTH ANGLE AT THE END OF THE PROPS. ALIGN WITH AND NAIL INTO BATTENS. DO NOT PENETRATE TREE OR PALM WITH NAILS.

9. IF IT APPEARS THAT ADDITIONAL CONSTRUCTION WORK WILL TAKE PLACE NEAR TO OR IN THE VICINITY OF THE NEWLY BRACED TREES OR PALMS, THEN PROPS ARE TO BE CLEARLY LABELED WITH DURABLE, WEATHERPROOF SIGN TAGS AND INCLUDE THE STATEMENT, "DO NOT REMOVE."

10. PROPS ARE NOT TO BE REMOVED UNTIL APPROVED BY THE LANDSCAPE CONTRACTOR AND LANDSCAPE ARCHITECT.

TREES AND PALMS LESS THAN 6" DBH TO BE BRACED BY GUYING:

1. CHOOSE THE CORRECT SIZE AND NUMBER OF STAKES AND SIZE OF SLEEVE AND WIRE. GUYING SHALL BE COMPLETED WITHIN 48 HOURS OF PLANTING THE TREE.

2. CUT LENGTHS OF STAKING SLEEVE TO EXTEND 2 INCHES PAST TREE TRUNK WHEN WRAPPING AROUND.

3. SPACE STAKES EVENLY ON OUTSIDE OF WATER RING AND DRIVE EACH FIRMLY INTO THE GROUND. STAKES SHOULD BE DRIVEN AT A 30 DEGREE ANGLE WITH THE POINT OF THE STAKE TOWARD THE TREE UNTIL 4 TO 5 INCHES ARE LEFT SHOWING.

4. PLACE THE SLEEVE AROUND THE TRUNK JUST ABOVE THE LOWEST BRANCH.

5. THREAD THE WIRE THROUGH THE SLEEVE AND PAST THE STAKE, ALLOWING APPROXIMATELY 2 FEET OF EACH OF THE TWO ENDS BEYOND THE STAKE BEFORE CUTTING THE WIRE.

6. TWIST WIRE AT RUBBER SLEEVE TO KEEP IT IN PLACE

7. PULL WIRE DOWN AND WIND BOTH ENDS AROUND STAKE TWICE. TWIST WIRE BACK ONTO ITSELF TO SECURE IT BEFORE CUTTING OFF THE EXCESS.

8. THE ABOVE PROCEDURES ARE TO BE FOLLOWED FOR EACH STAKE, KEEPING THE TREE STRAIGHT AT ALL TIMES.

9. THERE SHOULD BE A 1 TO 3 INCH SWAY IN THE TREE (THE WIRES SHOULD NOT BE PULLED TIGHT) FOR BEST ESTABLISHMENT.

10. FLAG THE GUY WIRES WITH EMERGENCY ORANGE SURVEYOR'S FLAGGING OR APPROVED EQUAL FOR SAFETY.

11. WIRES ARE NOT TO BE REMOVED UNTIL APPROVED BY LANDSCAPE ARCHITECT OR AN ESTABLISHMENT PERIOD OF AT LEAST ONE YEAR; WHICHEVER COMES FIRST.

SHOP DRAWINGS / SUBMITTALS AND MOCK-UPS

1. LANDSCAPE: SUBMIT PHOTOGRAPHS OF ALL MATERIALS WITH SCALE REFERENCE. INDICATE GROWER'S LOCATION AND ANY LEAD TIME FOR ROOT PRUNING OR PREPARATION.

CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY

CHECKED BY


PLANTING NOTES & SPECIFICATIONS



PHIPPS OCEAN
PARK
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER

LP.401

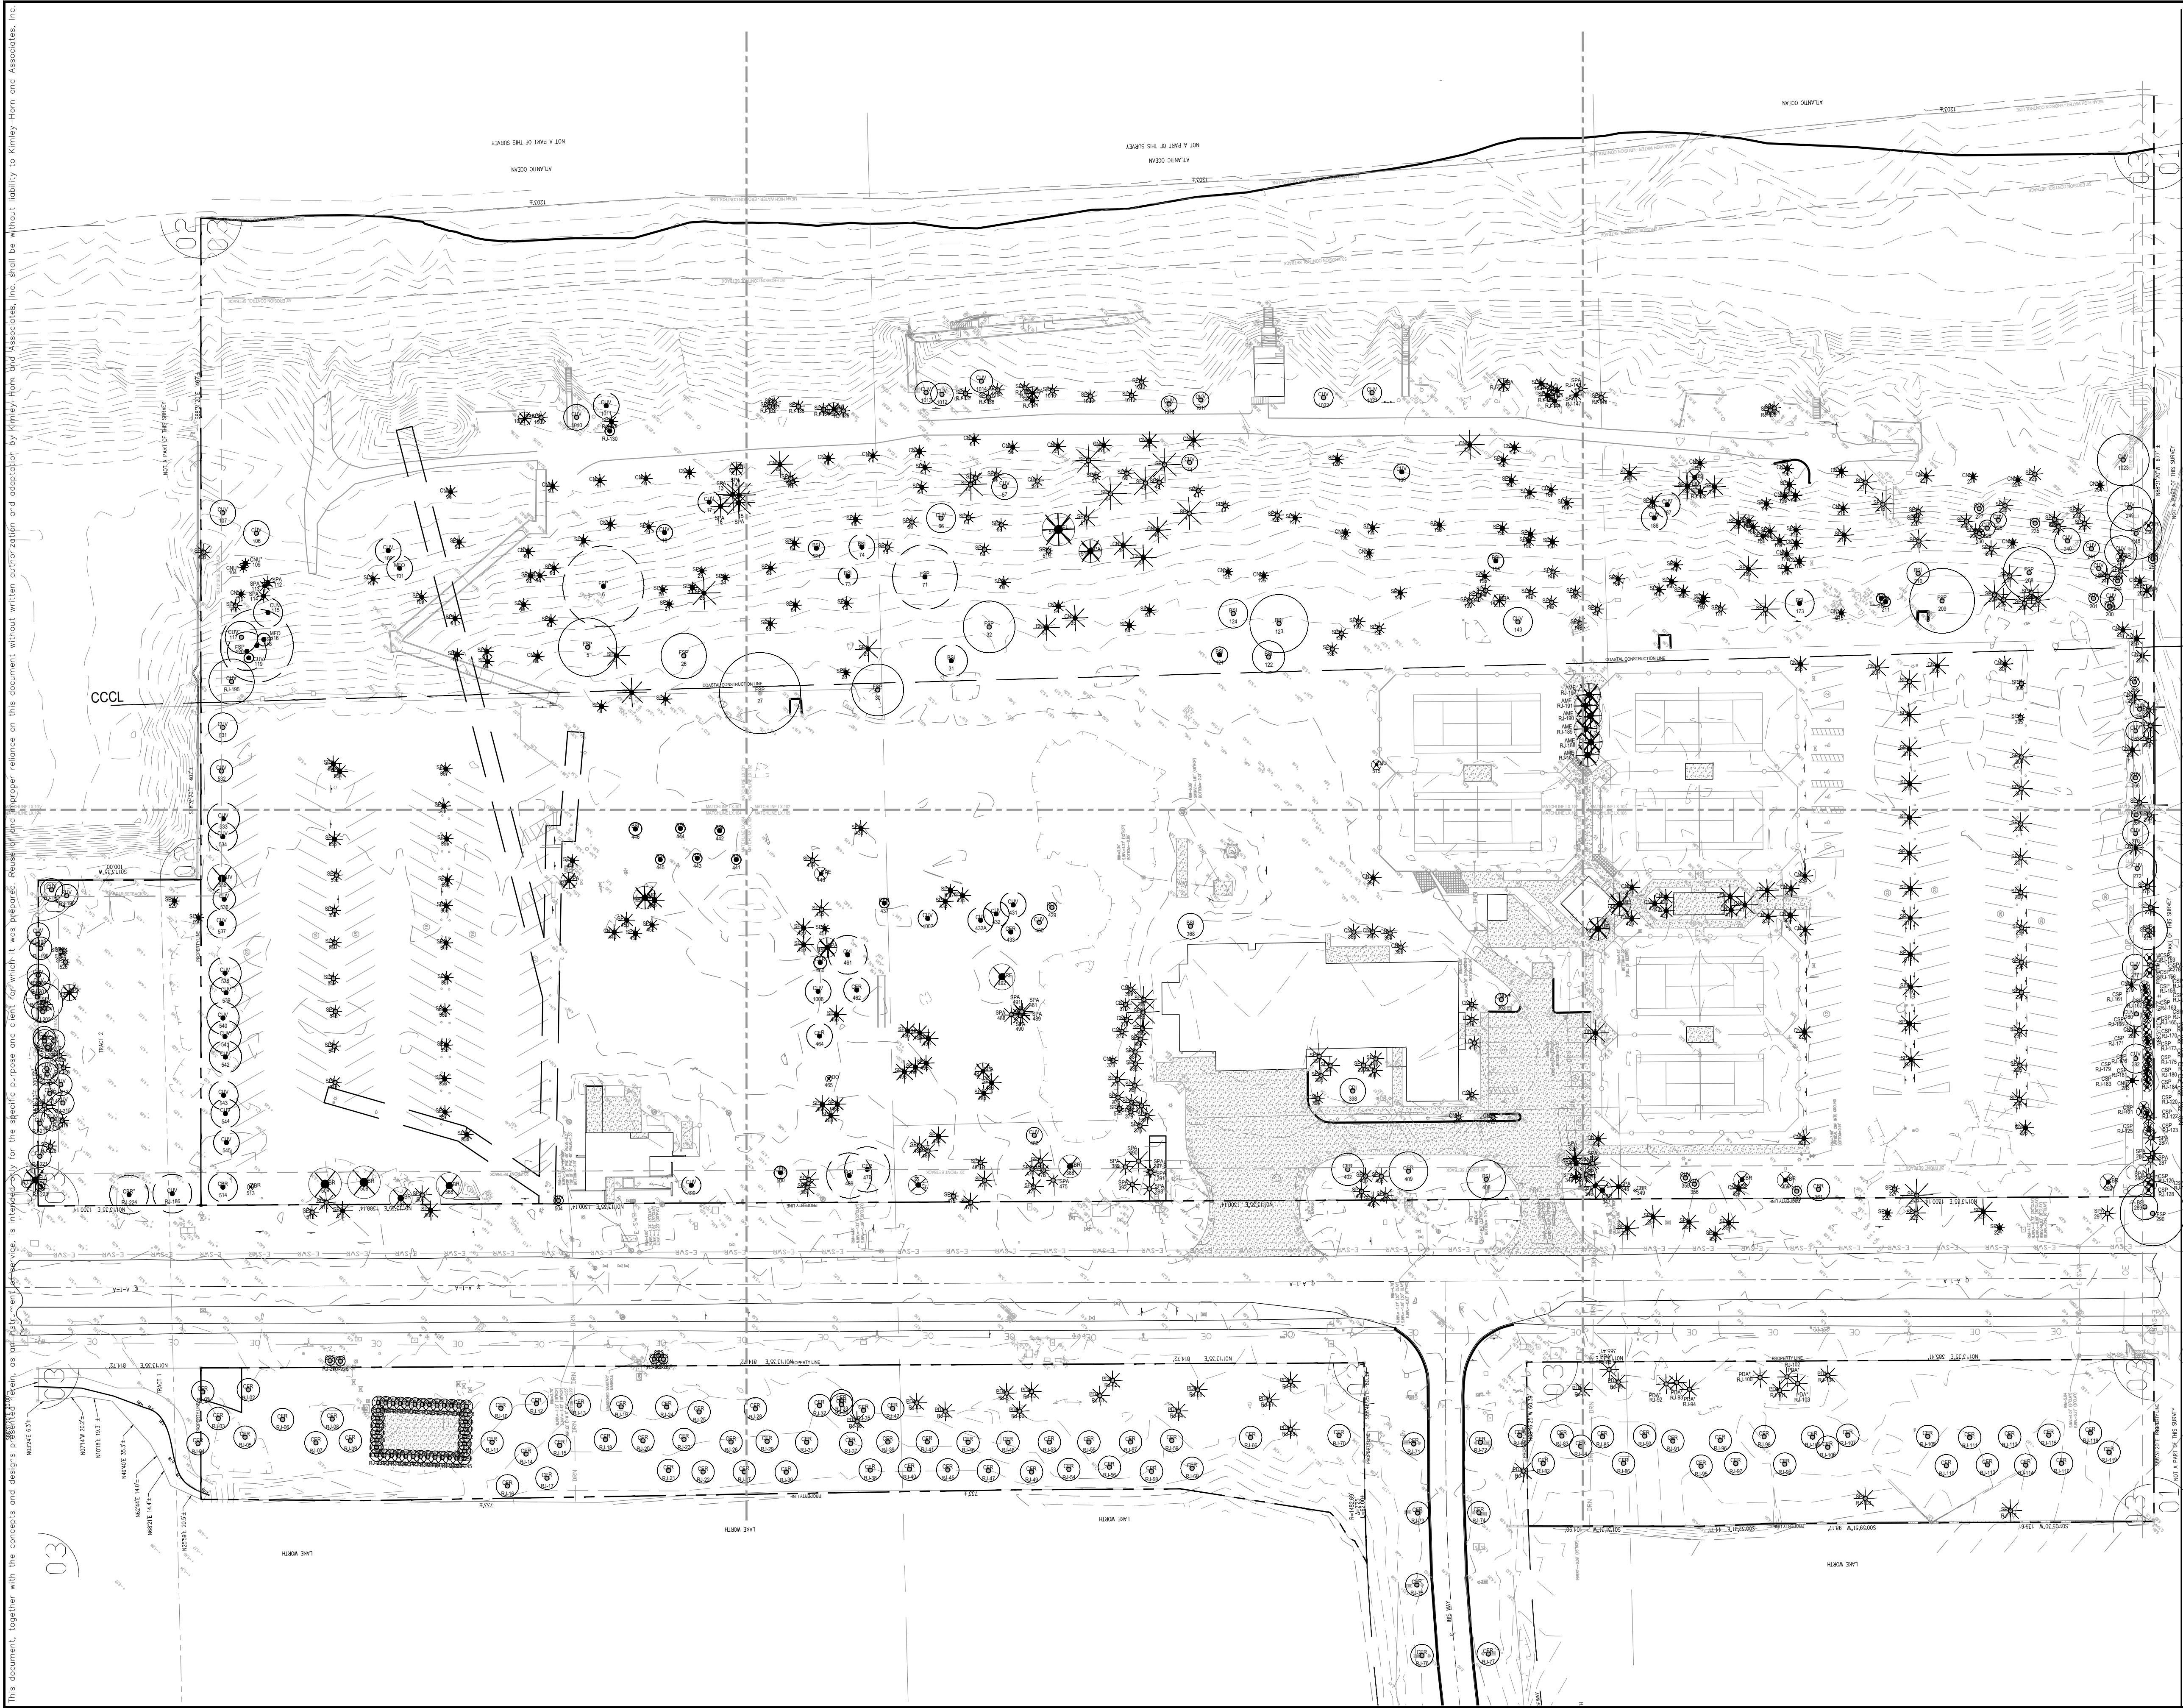

LEGEND

PROPERTY LINE
SETBACK LINE

EXISTING TO REMAIN
TREES



EXISTING TO BE REMOVED
TREES



EXISTING TO BE RELOCATED
TREES



EXISTING OFFSITE TO REMAIN
TREES



PALMS



EXISTING TO BE REMOVED
PALMS



EXISTING TO BE RELOCATED
PALMS




EXISTING OFFSITE TO REMAIN
PALMS



GENERAL NOTES:

1. TREE SURVEY BASED ON ALL AVAILABLE INFORMATION. CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION. RAYMOND JUNGLES, INC. MAY ASSIST WITH THE TAGGING OF ALL TREES IN THE FIELD.
2. ALL TREES TO BE RELOCATED SHALL BE ROOT PRUNED 60 DAYS PRIOR TO THEIR RELOCATION. RJI WILL ALSO OVERSEE ANY RECOMMENDATIONS FOR FURTHER MODIFICATIONS TO ANY EXISTING MATERIAL.
3. ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.
4. CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON SITE EXCAVATION.
5. SEE LR.200 FOR TREE DISPOSITION SCHEDULE.
6. REVIEW ADDITIONAL NOTES AND SPECIFICATIONS ON SHEET LR.201 FOR RELOCATED MATERIAL.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY


CHECKED BY

TREE DISPOSITION
PLAN



**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER
LR.100

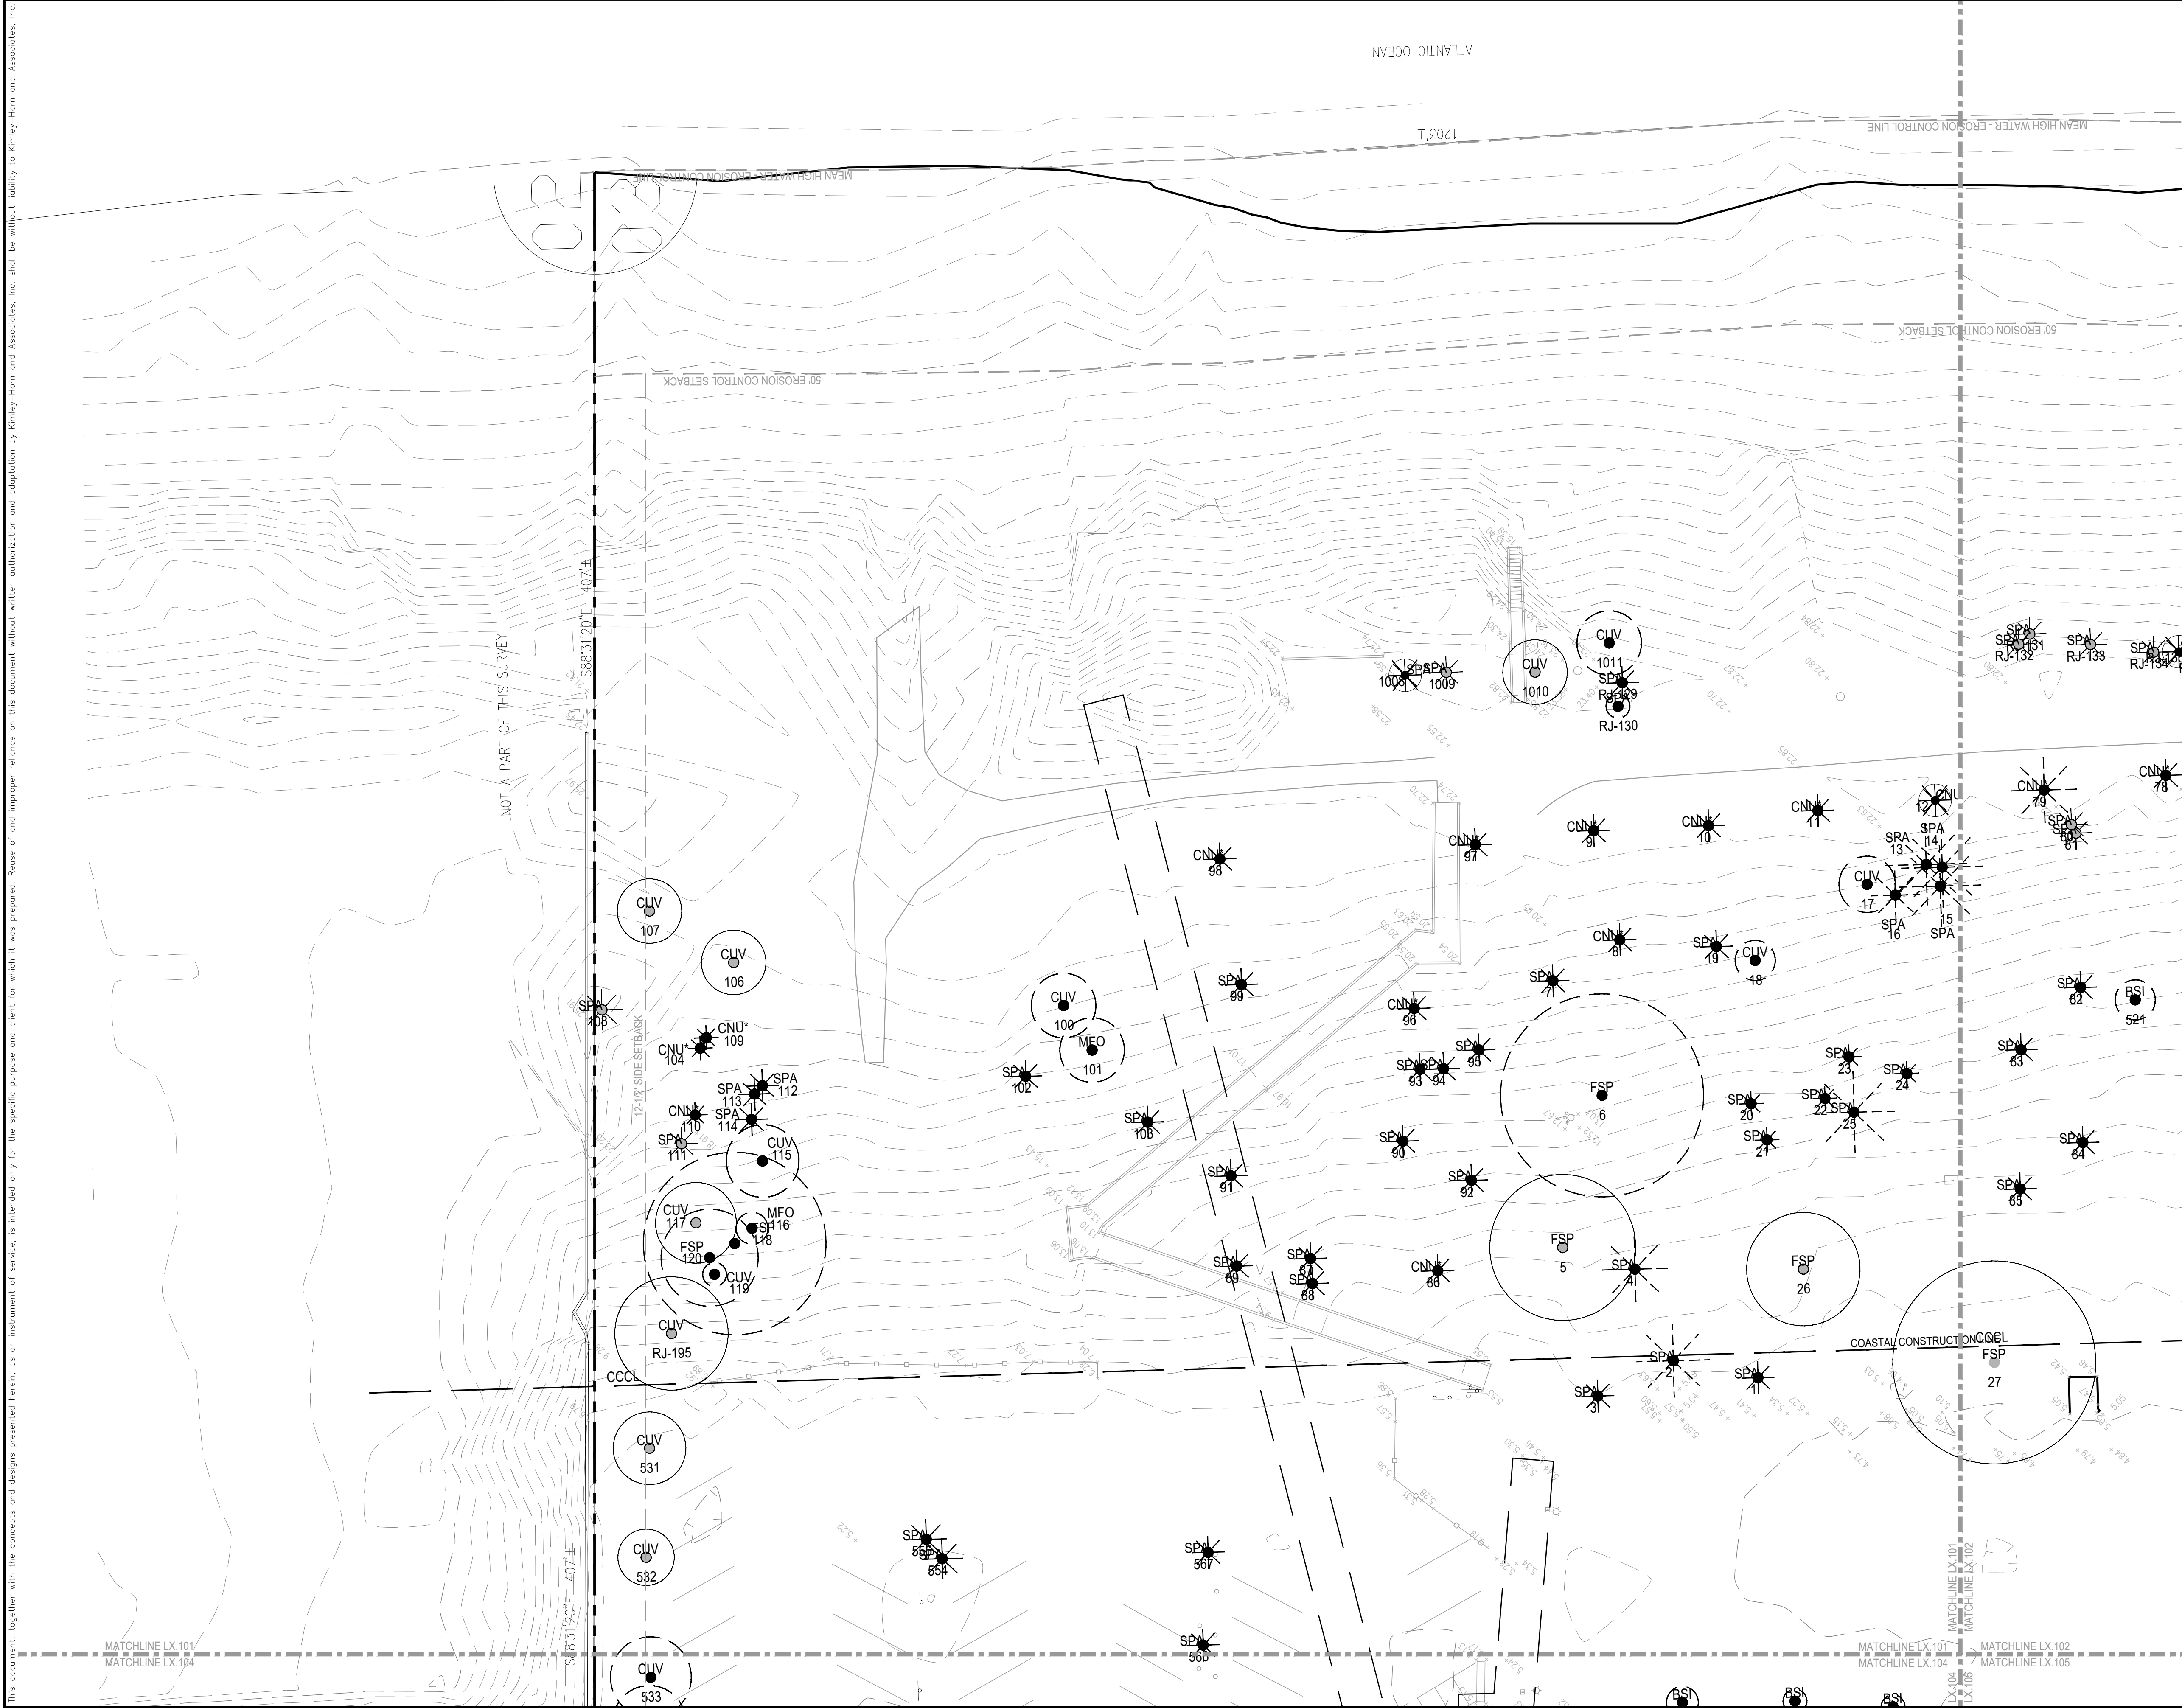

LEGEND

PROPERTY LINE
SETBACK LINE

EXISTING TO REMAIN
TREES



EXISTING TO BE REMOVED
TREES



EXISTING TO BE RELOCATED
TREES




EXISTING OFFSITE TO REMAIN
TREES



GENERAL NOTES:

1. TREE SURVEY BASED ON ALL AVAILABLE INFORMATION. CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION. RAYMOND JUNGLES, INC. MAY ASSIST WITH THE TAGGING OF ALL TREES IN THE FIELD.
2. ALL TREES TO BE RELOCATED SHALL BE ROOT PRUNED 60 DAYS PRIOR TO THEIR RELOCATION. RJ WILL ALSO OVERSEE ANY RECOMMENDATIONS FOR FURTHER MODIFICATIONS TO ANY EXISTING MATERIAL.
3. ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.
4. CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON SITE EXCAVATION.
5. SEE LR.200 FOR TREE DISPOSITION SCHEDULE.
6. REVIEW ADDITIONAL NOTES AND SPECIFICATIONS ON SHEET LR.201 FOR RELOCATED MATERIAL.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS

NEW YORK - PALM BEACH
FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY


CHECKED BY

TREE DISPOSITION
PLAN NORTHEAST



**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER
LR.101

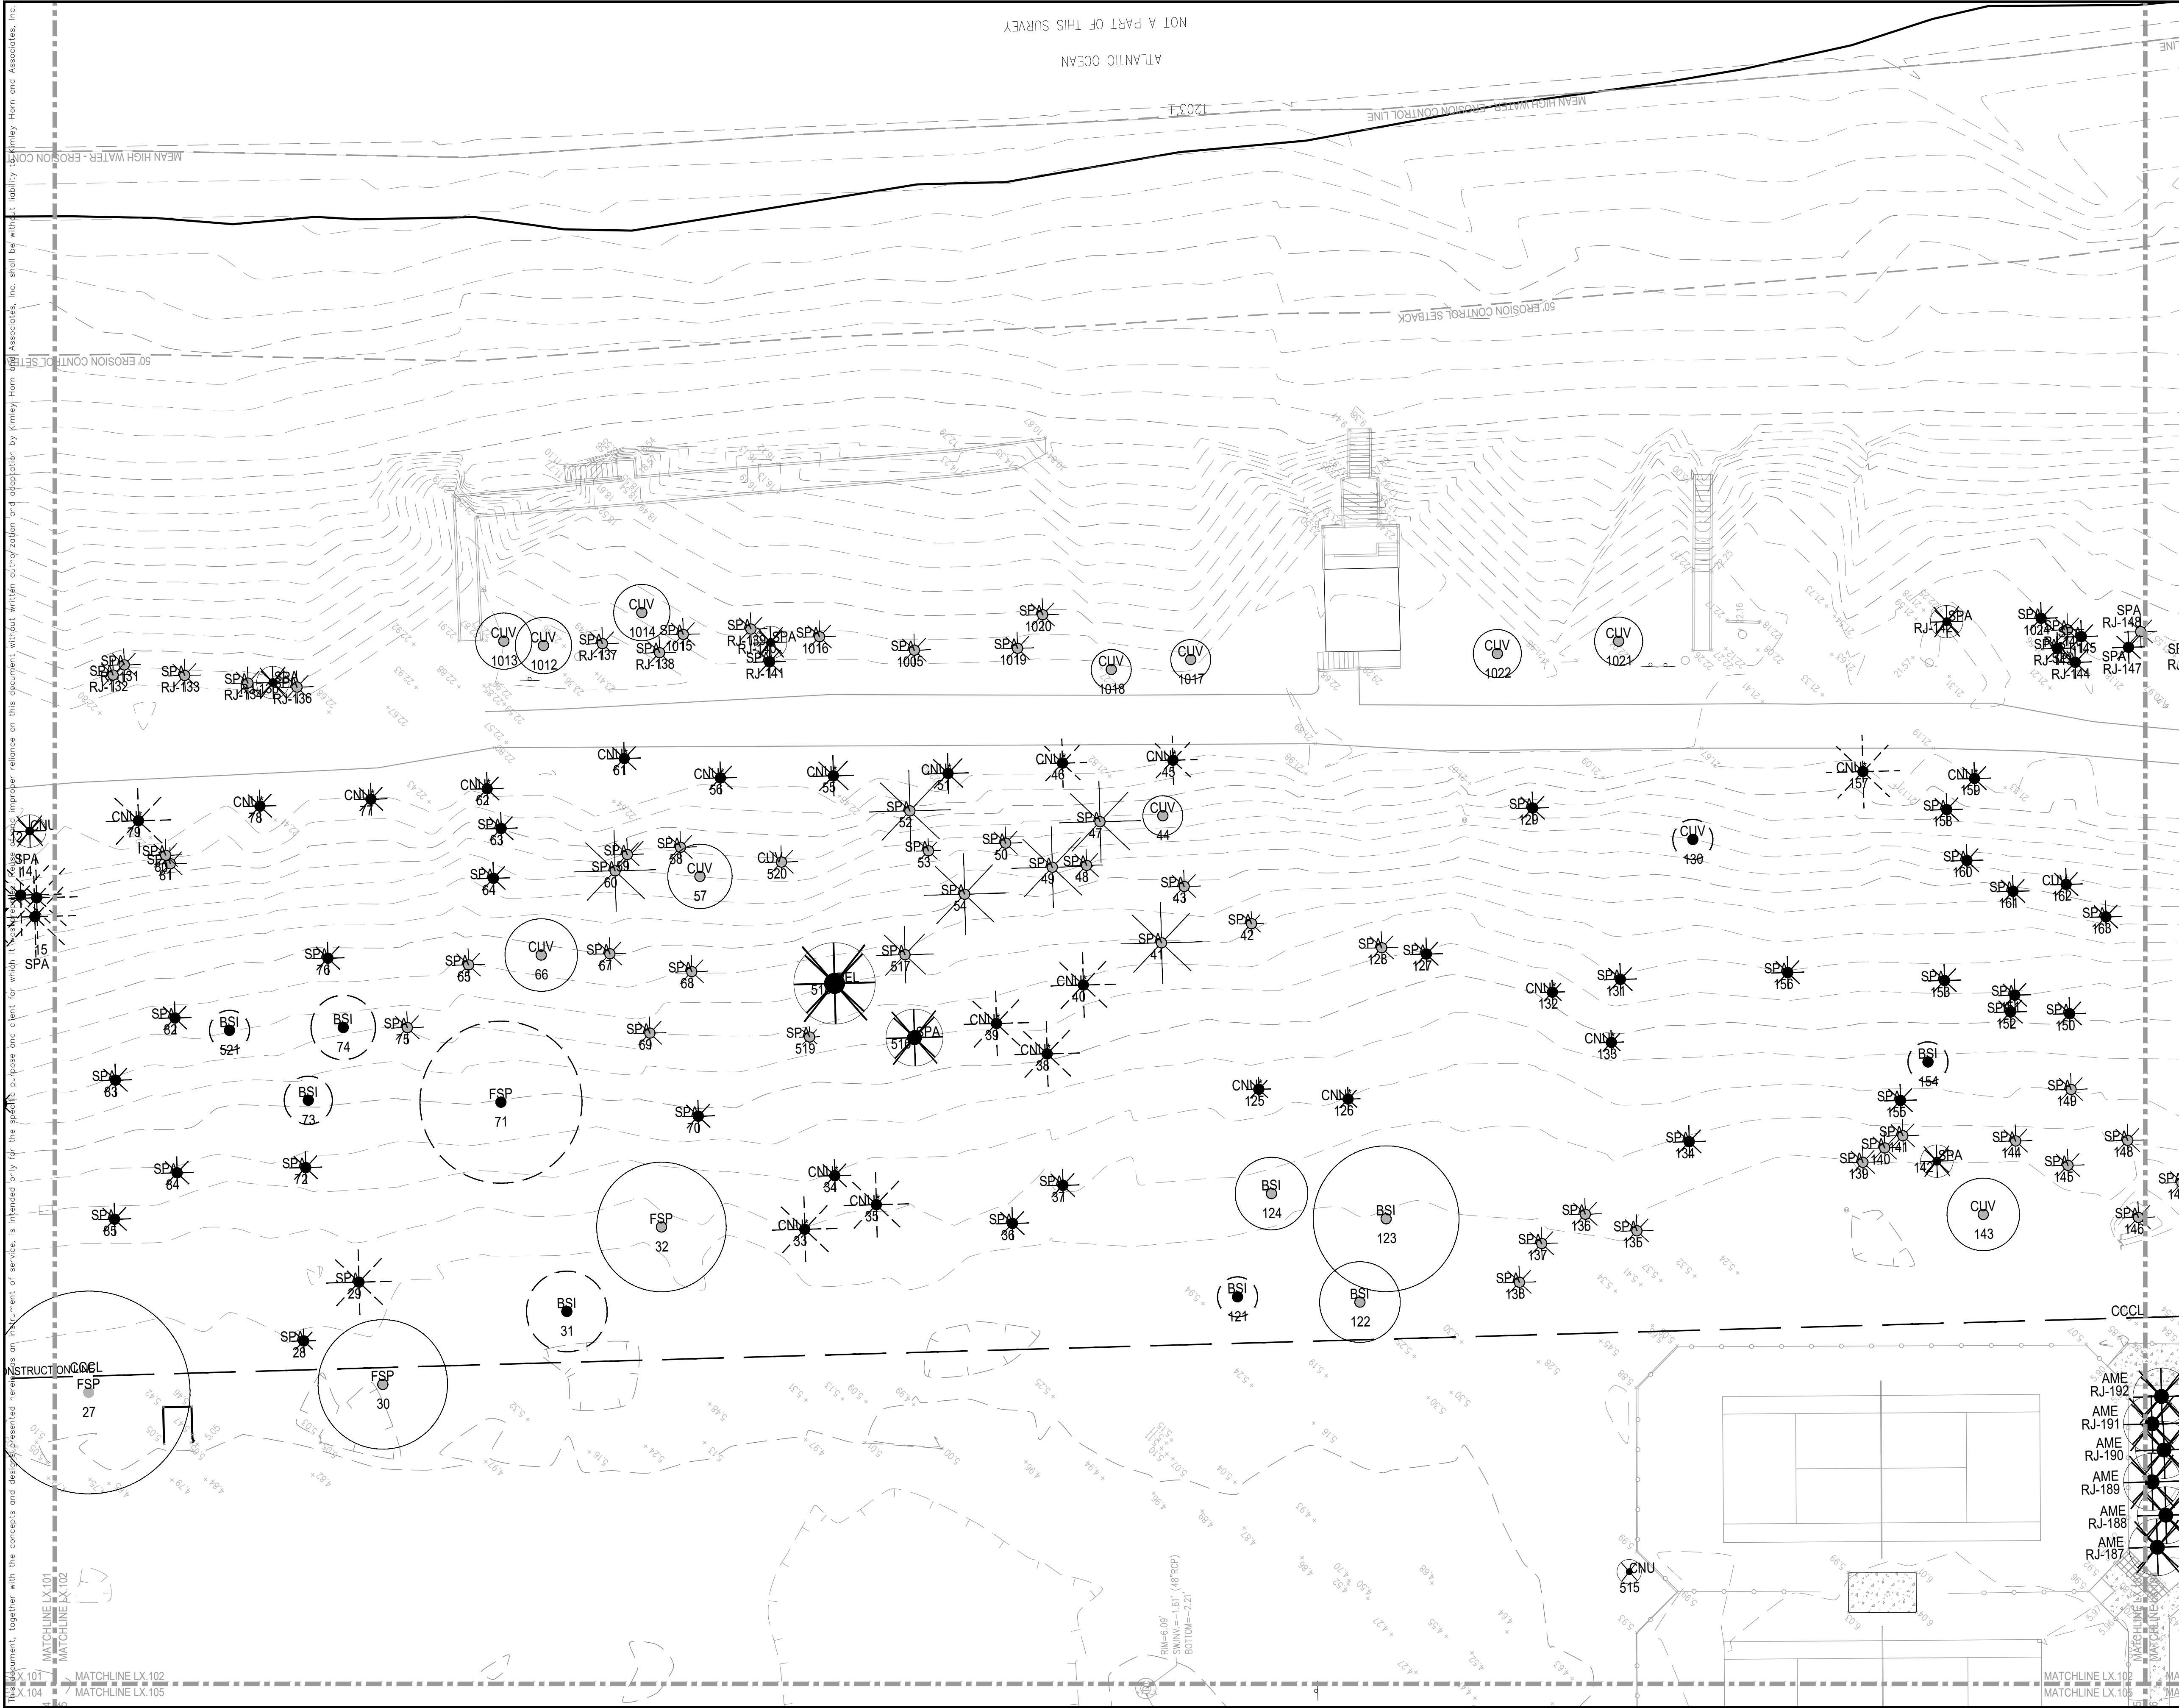

LEGEND

PROPERTY LINE

SETBACK LINE

EXISTING TO REMAIN TREES

PALMS

EXISTING TO BE REMOVED TREES

PALMS

EXISTING TO BE RELOCATED TREES

PALMS

EXISTING OFFSITE TO REMAIN TREES

PALMS

GENERAL NOTES:

1. TREE SURVEY BASED ON ALL AVAILABLE INFORMATION. CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION. RAYMOND JUNGLES, INC. MAY ASSIST WITH THE TAGGING OF ALL TREES IN THE FIELD.

2. ALL TREES TO BE RELOCATED SHALL BE ROOT PRUNED 60 DAYS PRIOR TO THEIR RELOCATION. RJI WILL ALSO OVERSEE ANY RECOMMENDATIONS FOR FURTHER MODIFICATIONS TO ANY EXISTING MATERIAL.

3. ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.

4. CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON SITE EXCAVATION.

5. SEE LR.200 FOR TREE DISPOSITION SCHEDULE.

6. REVIEW ADDITIONAL NOTES AND SPECIFICATIONS ON SHEET LR.201 FOR RELOCATED MATERIAL.

CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT

FAIRFAX & SAMMONS

NEW YORK - PALM BEACH

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037

ZON: 22-107

No.	REVISIONS	DATE

STATE OF FLORIDA

RAYMOND JUNGLES, INC.

LANDSCAPE ARCHITECT

PROJECT No.

DATE

SCALE

DESIGNED BY

DRAWN BY

CHECKED BY

10/28/2022

AS SHOWN

TREE DISPOSITION
PLAN CENTER EAST


SEAL OF THE TOWN OF PALM BEACH, FLORIDA

PHIPPS OCEAN
PARK
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER

LR.102

S:\PROJECT\202050_Phipps Ocean Park Master Plan\20 DESIGN\24 WORKING\CAD\Sheets\2050_01_LR.101_Tree Disposition Plan.dwg
Luy Du
2022/10/28




CHECKED BY _____

LR.103



SHEET NUMBER
LR.104

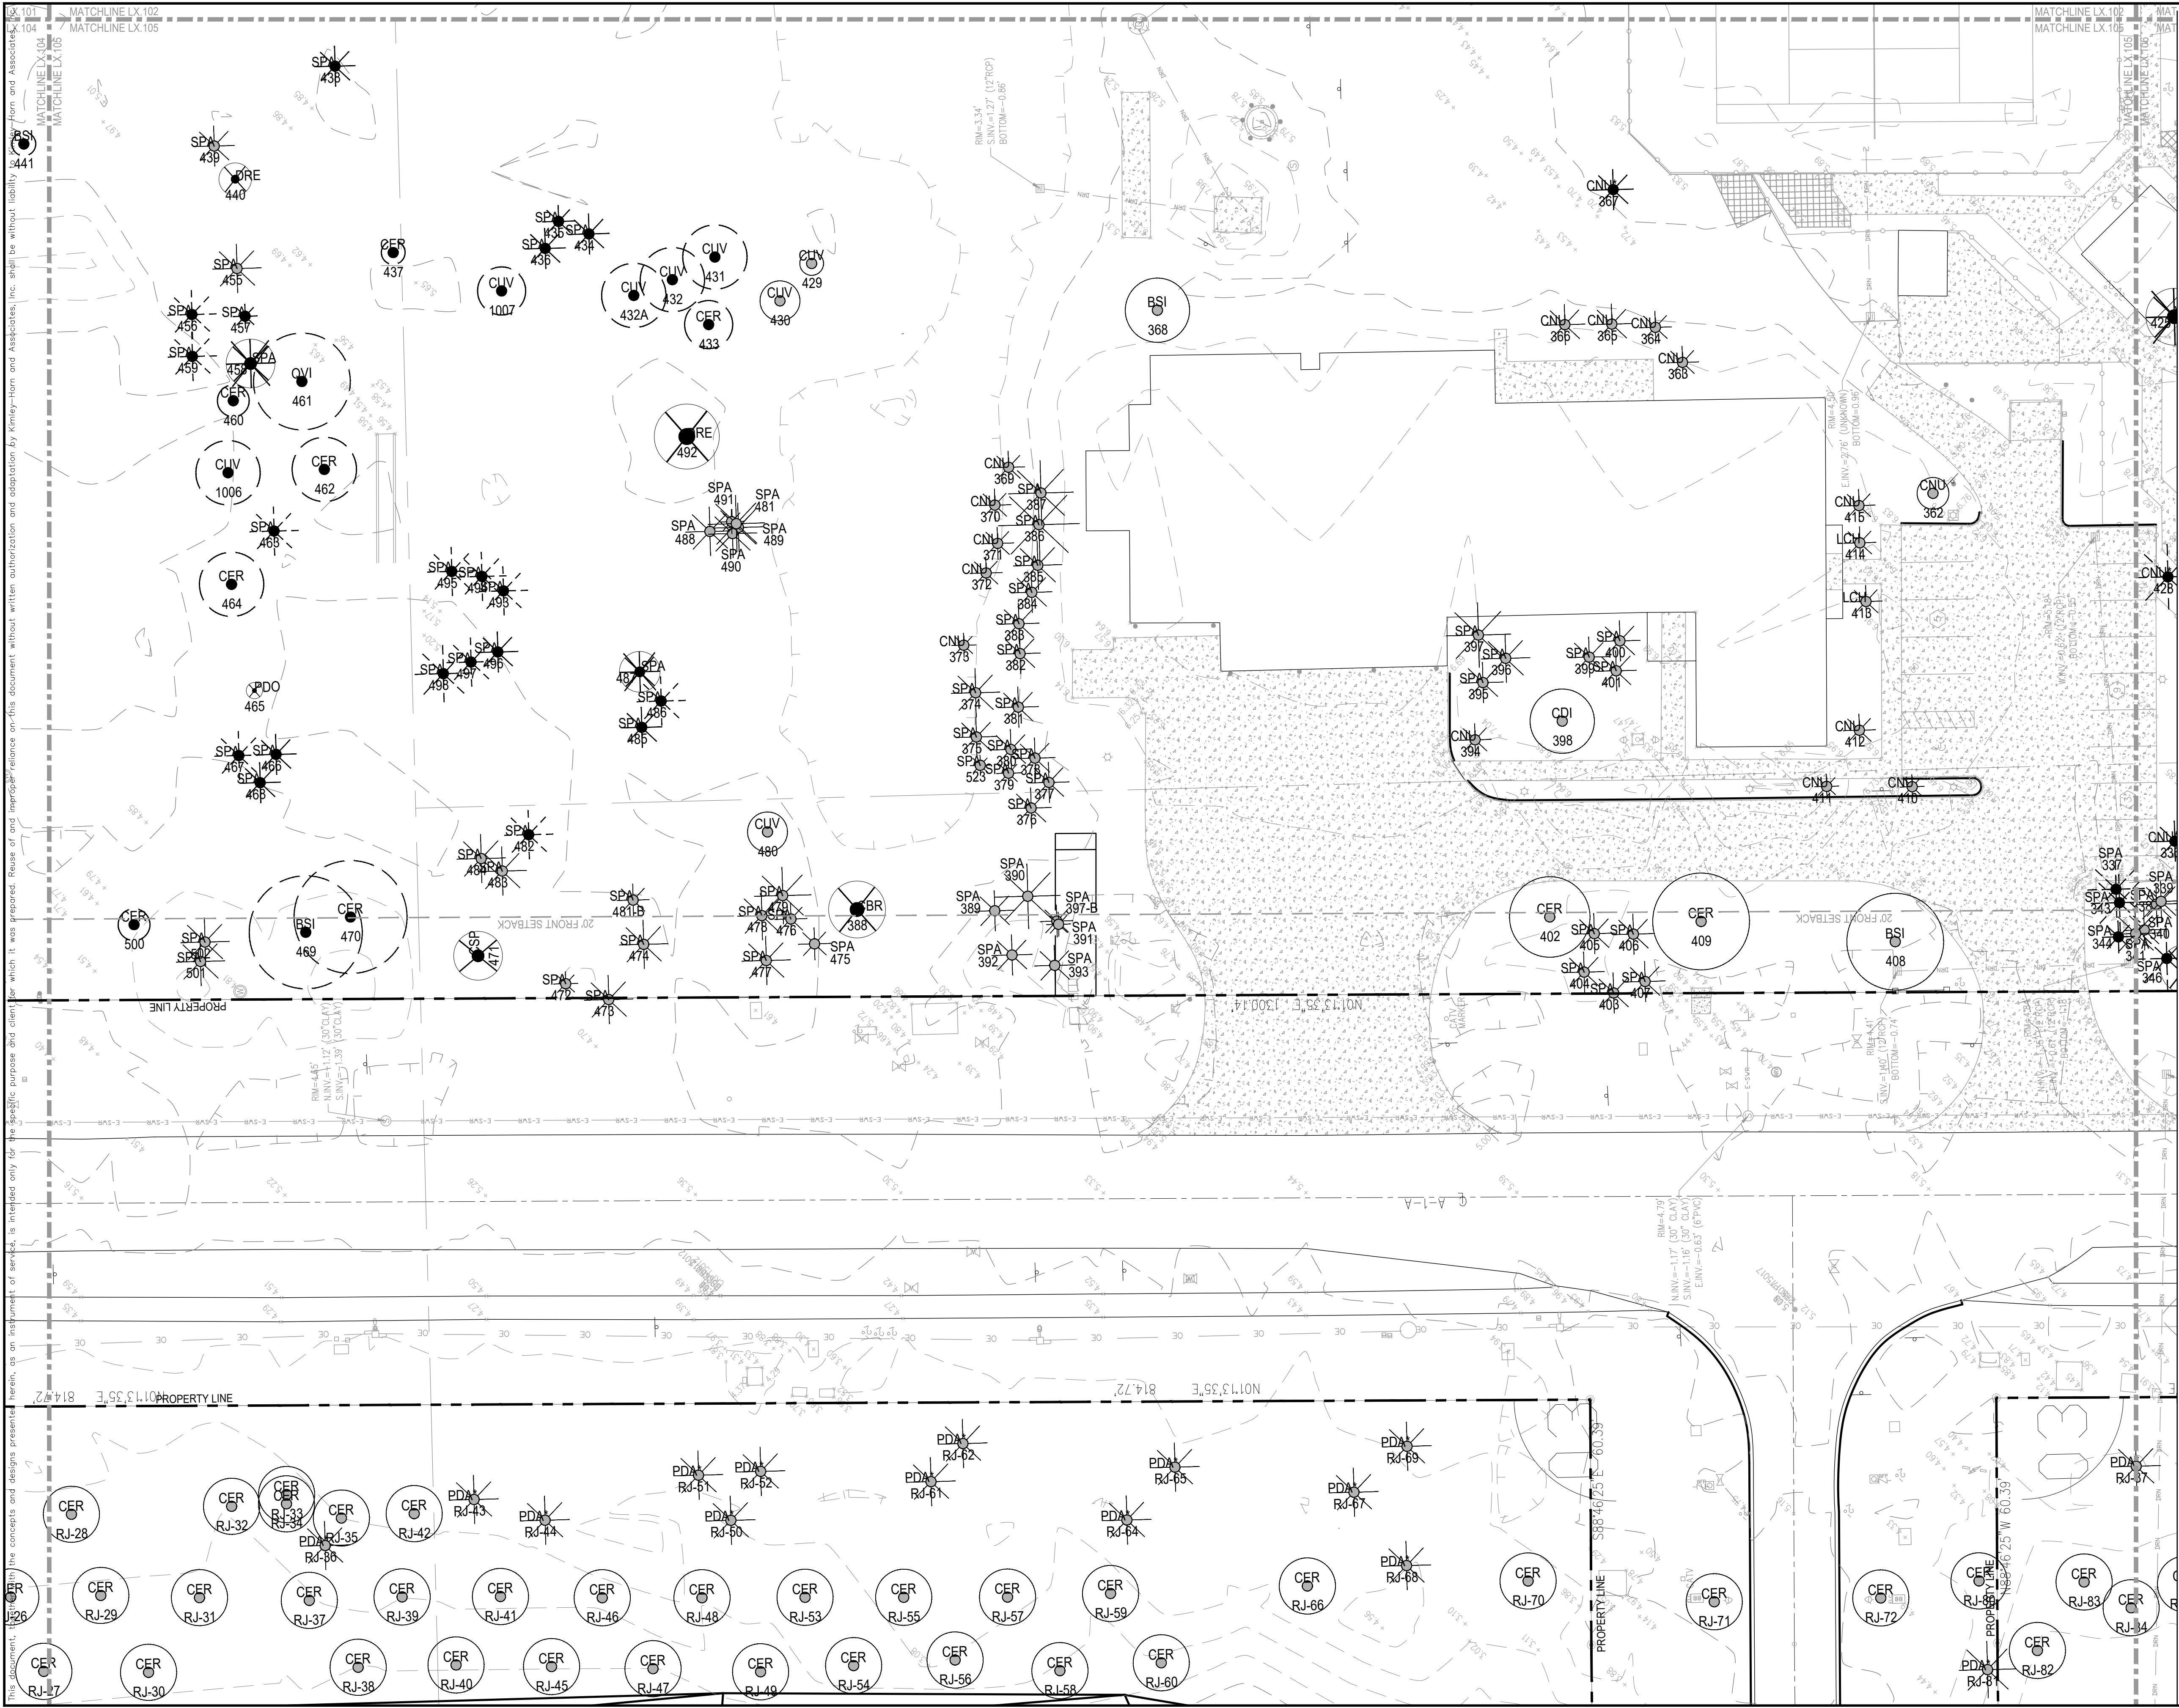


LEGEND

PROPERTY LINE
SETBACK LINE

EXISTING TO REMAIN TREES
PALMS
EXISTING TO BE REMOVED TREES
EXISTING TO BE RELOCATED TREES
EXISTING OFFSITE TO REMAIN TREES

- GENERAL NOTES:
1. TREE SURVEY BASED ON ALL AVAILABLE INFORMATION. CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION. RAYMOND JUNGLES, INC. MAY ASSIST WITH THE TAGGING OF ALL TREES IN THE FIELD.
 2. ALL TREES TO BE RELOCATED SHALL BE ROOT PRUNED 60 DAYS PRIOR TO THEIR RELOCATION. RJ WILL ALSO OVERSEE ANY RECOMMENDATIONS FOR FURTHER MODIFICATIONS TO ANY EXISTING MATERIAL.
 3. ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.
 4. CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON SITE EXCAVATION.
 5. SEE LR.200 FOR TREE DISPOSITION SCHEDULE.
 6. REVIEW ADDITIONAL NOTES AND SPECIFICATIONS ON SHEET LR.201 FOR RELOCATED MATERIAL.



CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT



FAIRFAX & SAMMONS
NEW YORK - PALM BEACH
FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107

No.	REVISIONS	DATE



PROJECT No.

DATE 10/28/2022

SCALE AS SHOWN

DESIGNED BY

DRAWN BY

CHECKED BY


TREE DISPOSITION
PLAN CENTER WEST



**PHIPPS OCEAN
PARK**
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER

LR.105

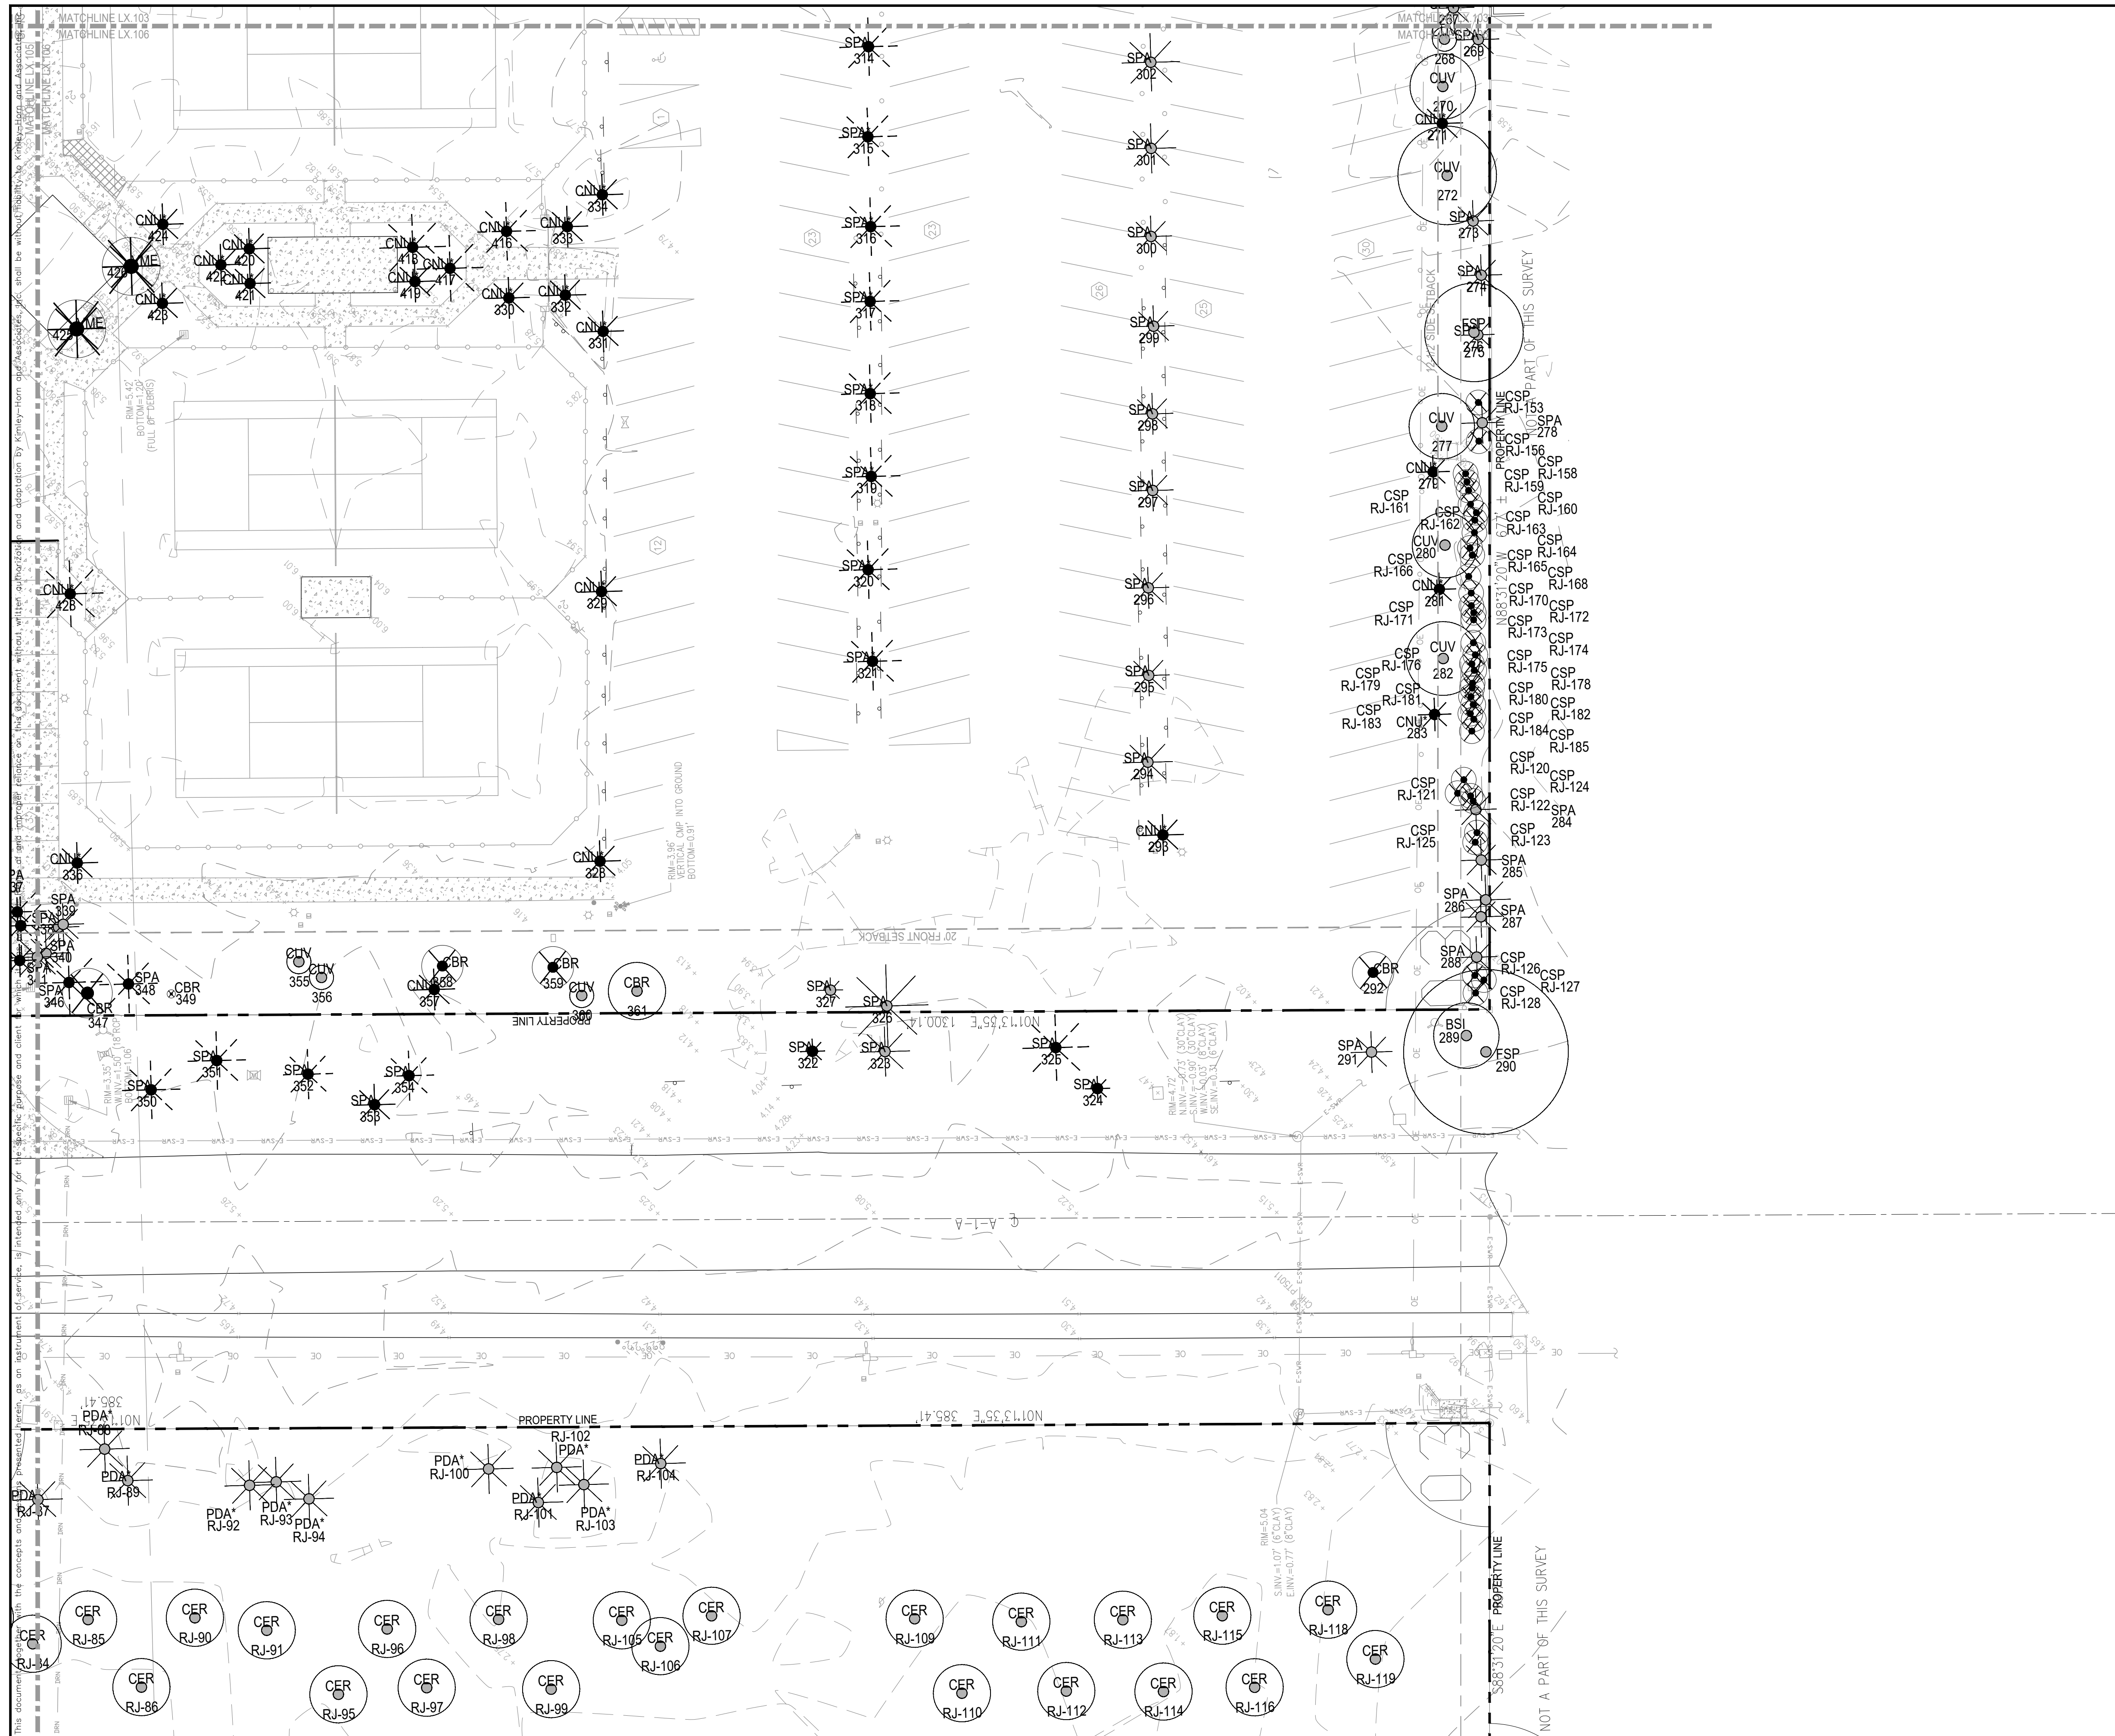

LEGEND

SETBACK LINE

EXISTING TO REMAIN
TREES

 X

EXISTING TO BE REMOVED
TREES PALMS

EXISTING TO BE RELOCATED
TREES PALMS

EXISTING OFFSITE TO REMAIN	
TREES	PALMS
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0
11	0
12	0
13	0
14	0
15	0
16	0
17	0
18	0
19	0
20	0
21	0
22	0
23	0
24	0
25	0
26	0
27	0
28	0
29	0
30	0
31	0
32	0
33	0
34	0
35	0
36	0
37	0
38	0
39	0
40	0
41	0
42	0
43	0
44	0
45	0
46	0
47	0
48	0
49	0
50	0
51	0
52	0
53	0
54	0
55	0
56	0
57	0
58	0
59	0
60	0
61	0
62	0
63	0
64	0
65	0
66	0
67	0
68	0
69	0
70	0
71	0
72	0
73	0
74	0
75	0
76	0
77	0
78	0
79	0
80	0
81	0
82	0
83	0
84	0
85	0
86	0
87	0
88	0
89	0
90	0
91	0
92	0
93	0
94	0
95	0
96	0
97	0
98	0
99	0
100	0

GENERAL NOTES:

1. TREE SURVEY BASED ON ALL AVAILABLE INFORMATION, CONTRACTOR TO REPORT ALL DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW PRIOR TO CONSTRUCTION. RAYMOND JUNGLES, INC. MAY ASSIST WITH THE TAGGING OF ALL TREES IN THE FIELD.
2. ALL TREES TO BE RELOCATED SHALL BE ROOT PRUNED 60 DAYS PRIOR TO THEIR RELOCATION. RJJ WILL ALSO OVERSEE ANY RECOMMENDATIONS FOR FURTHER MODIFICATIONS TO ANY EXISTING MATERIAL.
3. ALL PITS TO BE FILLED THE SAME DAY OF REMOVAL OF TREES. RESTORE SURFACE WITH SOD OR MULCH TO MATCH EXISTING CONDITIONS.
4. CONTRACTOR SHALL VERIFY ALL EXISTING ABOVE AND UNDERGROUND UTILITIES 48 HOURS PRIOR TO ANY ON SITE EXCAVATION.
5. SEE LR 200 FOR TREE DISPOSITION SCHEDULE.
6. REVIEW ADDITIONAL NOTES AND SPECIFICATIONS ON SHEET LR 201 FOR RELOCATED MATERIAL.

CIVIL ENGINEER

Kimley»Horn

1920 WEKIVA WAY, SUITE 200,
WEST PALM BEACH, FL 33411
PHONE: 561-845-0665
FAX: 561-863-8175
WWW.KIMLEY-HORN.COM
REGISTRY NO. 35106

ARCHITECT

**FAIRFAX & SAMMONS**

FAIRFAX, SAMMONS & PARTNERS, LLC
214 BRAZILIAN AVENUE
PALM BEACH, FL 33480
PHONE: (561) 805-8591

LANDSCAPE ARCHITECT

jungles

RAYMOND JUNGLES, INC.
2964 AVIATION AVENUE
MIAMI, FL 33133
PHONE: (305) 858-6777

COA: 22-037
ZON: 22-107



PROJECT No.

DATE	10/28/2022
------	------------

SCALE AS SHOWN

DRAWN BY

CHECKED BY _____

--	--


TREE DISPOSITION
PLAN SOUTHWEST



PHIPPS OCEAN
PARK
PREPARED FOR
TOWN OF PALM
BEACH

SHEET NUMBER

LR.106



This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.

jungles

Phioss Ocean Park - Master Plan - Tree Disposition List
9/23/2022

Iden.	Symbol	Scientific Name	Common Name	Disposition	DBH	SPREAD
1	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
2	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
3	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
4	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
5	GDI	Guapira discolor	Blolly	Remain	22"	36'
6	FSP	Ficus aurea	Strangler Fig	Relocate	50"	06'
7	SPA	Sabal palmetto	Sabal Palm	Relocate	20"	06'
8	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
9	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
10	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
11	CNU	Cocos nucifera	Coconut Palm	Relocate	4"	06'
12	CNU	Cocos nucifera	Coconut Palm	Remove	4"	06'
13	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
14	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	20'
15	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	20'
16	SPA	Sabal palmetto	Sabal Palm	Relocate	18"	12'
17	CUV	Coccoloba uvifera	Seagrape	Relocate	7-8"	14'
18	CUV	Coccoloba uvifera	Seagrape	Relocate	3-16"	10'
19	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	06'
20	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
21	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
22	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
23	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
24	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
25	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
26	GDI	Guapira discolor	Blolly	Remain	16"	06'
27	FSP	Ficus aurea	Strangler Fig	Remain	8X12"	08'
28	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	06'
29	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
30	FSP	Ficus aurea	Strangler Fig	Remain	4-5.5"	08'
31	BSI	Bursera simaruba	Gumbo Limbo	Relocate	20"	06'
32	GDI	Guapira discolor	Blolly	Remain	20"	24'
33	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	18'
34	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
35	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	18'
36	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
37	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
38	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	20'
39	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	18'
40	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	20'
41	SPA	Sabal palmetto	Sabal Palm	Remain	12"	20'
42	SPA	Sabal palmetto	Sabal Palm	Remain	12"	06'
43	SPA	Sabal palmetto	Sabal Palm	Remain	14"	08'
44	CUV	Coccoloba uvifera	Seagrape	Remain	6"	10'
45	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	12'
46	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	12'
47	SPA	Sabal palmetto	Sabal Palm	Remain	12"	20'
48	SPA	Sabal palmetto	Sabal Palm	Remain	18"	08'
49	SPA	Sabal palmetto	Sabal Palm	Remain	22"	20'
50	SPA	Sabal palmetto	Sabal Palm	Remain	18"	08'
51	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	10'
52	SPA	Sabal palmetto	Sabal Palm	Remain	20"	20'
53	SPA	Sabal palmetto	Sabal Palm	Remain	16"	06'
54	SPA	Sabal palmetto	Sabal Palm	Remain	14"	20'
55	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	10'
56	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
57	CUV	Coccoloba uvifera	Seagrape	Remain	6-8"	06'
58	SPA	Sabal palmetto	Sabal Palm	Remain	16"	08'
59	SPA	Sabal palmetto	Sabal Palm	Remain	18"	08'
60	SPA	Sabal palmetto	Sabal Palm	Remain	18"	20'
61	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
62	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
63	SPA	Sabal palmetto	Sabal Palm	Relocate	20"	08'
64	SPA	Sabal palmetto	Sabal Palm	Relocate	18"	08'
65	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
66	CUV	Coccoloba uvifera	Seagrape	Remain	9-8"	06'
67	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
68	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
69	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
70	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
71	FSP	Ficus aurea	Strangler Fig	Relocate	40"	24'
72	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
73	BSI	Bursera simaruba	Gumbo Limbo	Relocate	6"	06'
74	BSI	Bursera simaruba	Gumbo Limbo	Relocate	10"	16'
75	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
76	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
77	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
78	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
79	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	18'
80	SPA	Sabal palmetto	Sabal Palm	Remain	14"	08'
81	SPA	Sabal palmetto	Sabal Palm	Remain	16"	08'
82	SPA	Sabal palmetto	Sabal Palm	Relocate	6"	08'
83	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
84	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
85	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
86	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
87	SPA	Sabal palmetto	Sabal Palm	Relocate	22"	08'
88	SPA	Sabal palmetto	Sabal Palm	Relocate	22"	08'
89	SPA	Sabal palmetto	Sabal Palm	Relocate	18"	08'
90	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
91	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
92	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
93	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
94	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
95	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
96	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
97	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
98	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
99	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
100	CUV	Coccoloba uvifera	Seagrape	Relocate	4-8"	06'

jungles

Phioss Ocean Park - Master Plan - Tree Disposition List
9/23/2022

Iden.	Symbol	Scientific Name	Common Name	Disposition	DBH	SPREAD
101	MFO	Mastichodendron foetidissium	Mastic	Relocate	2-4"	08'
102	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
103	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
104	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
105	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
106	CUV	Coccoloba uvifera	Seagrape	Remain	16"	16'
107	CUV	Coccoloba uvifera	Seagrape	Remain	16"	16'
108	SPA	Sabal palmetto	Sabal Palm	Remain	22"	10'
109	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
110	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
111	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
112	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
113	SPA	Sabal palmetto	Sabal Palm	Remain	8"	08'
114	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
115	CUV	Coccoloba uvifera	Seagrape	Remain	20"	18'
116	MFO	Mastichodendron foetidissium	Mastic	Remain	4"	08'
117	CUV	Coccoloba uvifera	Seagrape	Remain	24"	20'
118	FSP	Ficus aurea	Strangler Fig	Remain	cluster	48'
119	CUV	Coccoloba uvifera	Seagrape	Remain	3-4"	06'
120	FSP	Ficus aurea	Strangler Fig	Remain	120"	24'
121	BSI	Bursera simaruba	Gumbo Limbo	Relocate	8"	06'
122	BSI	Bursera simaruba	Gumbo Limbo	Remain	8"	20'
123	BSI	Bursera simaruba	Gumbo Limbo	Remain	8"	36'
124	BSI	Bursera simaruba	Gumbo Limbo	Remain	10"	06'
125	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
126	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
127	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
128	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
129	SPA	Sabal palmetto	Sabal Palm	Relocate	20"	08'
130	CUV	Coccoloba uvifera	Seagrape	Relocate	8"	10'
131	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
132	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
133	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
134	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
135	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
136	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
137	SPA	Sabal palmetto	Sabal Palm	Remain	8"	08'
138	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
139	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
140	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
141	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
142	SPA	Sabal palmetto	Sabal Palm	Remove	10"	08'
143	CUV	Coccoloba uvifera	Seagrape	Remain	7-3"	10'
144	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
145	SPA	Sabal palmetto	Sabal Palm	Remain	12"	08'
146	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
147	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
148	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
149	SPA	Sabal palmetto	Sabal Palm	Remain	14"	08'
150	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	06'
151	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	06'
152	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	06'
153	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	06'
154	BSI	Bursera simaruba	Gumbo Limbo	Relocate	4"	10'
155	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	06'
156	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	06'
157	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	18'
158	SPA	Sabal palmetto	Sabal Palm	Relocate	22"	06'
159	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
160	SPA	Sabal palmetto	Sabal Palm	Relocate	20"	06'
161	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	06'
162	CUV	Coccoloba uvifera	Seagrape	Relocate	8"	08'
163	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
164	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	08'
165	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
166	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
167	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
168	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
169	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
170	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
171	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
172	SPA	Sabal palmetto	Sabal Palm	Remain	12"	18'
173	BSI	Bursera simaruba	Gumbo Limbo	Relocate	12"	10'
174	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
175	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
176	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
177	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
178	SPA	Sabal palmetto	Sabal Palm	Relocate	6"	03'
179	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
180	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
181	SPA	Sabal palmetto	Sabal Palm	Relocate	8"	08'
182	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	08'
183	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	08'
184	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	20'
185	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	20'
186	CUV	Coccoloba uvifera	Seagrape	Relocate	5"	10'
187	CUV	Coccoloba uvifera	Seagrape	Relocate	34"	10'
188	SPA	Sabal palmetto	Sabal Palm	Relocate	16"	06'
189	SPA	Sabal palmetto	Sabal Palm	Relocate	16"	16'
190	BSI	Bursera simaruba	Gumbo Limbo	Remove	8"	10'
191	SPA	Sabal palmetto	Sabal Palm	Relocate	12"	14'
192	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	10'
193	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
194	SPA	Sabal palmetto	Sabal Palm	Relocate	20"	18'
195	SPA	Sabal palmetto	Sabal Palm	Relocate	14"	48'
196	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
197	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
198	SPA	Sabal palmetto	Sabal Palm	Relocate	24"	14'
199	CUV	Coccoloba uvifera	Seagrape	Remain	6"	14'
200	CUV	Coccoloba uvifera	Seagrape	Remain	6"	06'

jungles

Phioss Ocean Park - Master Plan - Tree Disposition List
9/23/2022

Iden.	Symbol	Scientific Name	Common Name	Disposition	DBH	SPREAD
201	CUV	Coccoloba uvifera	Seagrape	Remain	6"	06'
202	SPA	Sabal palmetto	Sabal Palm	Remain	10"	14'
203	SPA	Sabal palmetto	Sabal Palm	Remain	12"	14'
204	SPA	Sabal palmetto	Sabal Palm	Remain	8"	14'
205	SPA	Sabal palmetto	Sabal Palm	Remain	12"	14'
206	SPA	Sabal palmetto	Sabal Palm	Remain	12"	18'
207	SPA	Sabal palmetto	Sabal Palm	Remain	12"	14'
208	FSP	Ficus aurea	Strangler Fig	Remain	48"	30'
209	FSP	Ficus aurea	Strangler Fig	Remain	72"	40'
210	BSI	Bursera simaruba	Gumbo Limbo	Remain	12"	06'
211	BSI	Bursera simaruba	Gumbo Limbo	Relocate	12"	06'
212	BSI	Bursera simaruba	Gumbo Limbo	Relocate	12"	06'
213	CNU	Cocos nucifera	Coconut Palm	Relocate	10"	06'
214	SPA	Sabal palmetto	Sabal Palm	Relocate	10"	14'
215	CNU	Cocos nucifera	Coconut Palm	Relocate	10"	06'
216	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
217	SPA	Sabal palmetto	Sabal Palm	Remain	16"	14'
218	SPA	Sabal palmetto	Sabal Palm	Remain	14"	14'
219	SPA	Sabal palmetto	Sabal Palm	Remain	10"	14'
220	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
221	SPA	Sabal palmetto	Sabal Palm	Remain	10"	08'
222	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	10'
223	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	06'
224	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
225	SPA	Sabal palmetto	Sabal Palm	Remain	16"	10'
226	SPA	Sabal palmetto	Sabal Palm	Remain	22"	10'
227	CUV	Coccoloba uvifera	Seagrape	Remain	5-8"	06'
228	CUV	Coccoloba uvifera	Seagrape	Remain	5-5"	10'
229	CUV	Coccoloba uvifera	Seagrape	Remain	2-8"	10'
230	CUV	Coccoloba uvifera	Seagrape	Remain	2-8"	06'
231	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
232	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
233	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
234	CNU	Cocos nucifera	Coconut Palm	Relocate	12"	06'
235	CUV	Coccoloba uvifera	Seagrape	Remain	2-9"	06'
236	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
237	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
238	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
239	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
240	CUV	Coccoloba uvifera	Seagrape	Remain	14"	16'
241	CUV	Coccoloba uvifera	Seagrape	Remain	6"	10'
242	CUV	Coccoloba uvifera	Seagrape	Remain	6"	10'
243	SPA	Sabal palmetto	Sabal Palm	Remain	8"	10'
244	CUV	Coccoloba uvifera	Seagrape	Remain	6"	06'
245	SPA	Sabal palmetto	Sabal Palm	Remain	6"	10'
246	CUV	Coccoloba uvifera	Seagrape	Remain	18"	20'
247	CBR	Calophyllum brasiliense	Brazil Beauty Leaf	Remove	1"	
248	CUV	Coccoloba uvifera	Seagrape	Remain	30"	30'
249	CUV	Coccoloba uvifera	Seagrape	Remain	24"	28'
250	CBR	Calophyllum brasiliense	Brazil Beauty Leaf	Remove	2"	
251	CRO	Clusia rosea	Pitch Apple	Remain	6"	06'
252	CNU	Cocos nucifera	Coconut Palm	Relocate	12"	08'
253	DMA	Dracena marginata	Red Edged Dracenia	Remove	4"	
254	CNU	Cocos nucifera	Coconut Palm	Relocate	6"	06'
255	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	08'
256	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	08'
257	CNU	Cocos nucifera	Coconut Palm	Relocate	14"	08'
258	CUV	Coccoloba uvifera	Seagrape	Remain	48"	06'
259	CNU	Cocos nucifera	Coconut Palm	Relocate	10"	08'
260	CUV	Coccoloba uvifera	Seagrape	Remain	18"	12'
261	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
262	SPA	Sabal palmetto	Sabal Palm	Remain	10"	14'
263	CUV	Coccoloba uvifera	Seagrape	Remain	18"	12'
264	CNU	Cocos nucifera	Coconut Palm	Relocate	12"	08'
265	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
266	CUV	Coccoloba uvifera	Seagrape	Remain	20"	06'
267	SPA	Sabal palmetto	Sabal Palm	Remain	14"	10'
268	CUV	Coccoloba uvifera	Seagrape	Remain	20"	06'
269	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
270	CUV	Coccoloba uvifera	Seagrape	Remain	10"	16'
271	CNU	Cocos nucifera	Coconut Palm	Relocate	10"	08'
272	CUV	Coccoloba uvifera	Seagrape	Remain	24"	24'
273	SPA	Sabal palmetto	Sabal Palm	Remain	14"	10'
274	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
275	FSP	Ficus aurea	Strangler Fig	Remain	18"	08'
276	SPA	Sabal palmetto	Sabal Palm	Remain	18"	24'
277	CUV	Coccoloba uvifera	Seagrape	Remain	12"	16'
278	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
279	CNU	Cocos nucifera	Coconut Palm	Relocate	12"	08'
280	CUV	Coccoloba uvifera	Seagrape	Remain	28"	16'
281	CNU	Cocos nucifera	Coconut Palm	Relocate	8"	08'
282	CUV	Coccoloba uvifera	Seagrape	Remain	18"	18'
283	CNU	Cocos nucifera	Coconut Palm	Relocate	14"	08'
284	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
285	SPA	Sabal palmetto	Sabal Palm	Remain	14"	10'
286	SPA	Sabal palmetto	Sabal Palm	Remain	16"	12'
287	SPA	Sabal palmetto	Sabal Palm	Remain	16"	10'
288	SPA	Sabal palmetto	Sabal Palm	Remain	18"	10'
289	BSI	Bursera simaruba	Gumbo Limbo	Remain	8"	16'
290	FSP	Ficus aurea	Strangler Fig	Remain	72"	40'
291	SPA	Sabal palmetto	Sabal Palm	Remain	12"	10'
292	CBR	Calophyllum brasiliense	Brazil Beauty Leaf	Remove	10"	
293	CNU	Cocos nucifera	Coconut Palm	Relocate	10"	08'
294	SPA	Sabal palmetto	Sabal Palm	Remain	10"	12'
295	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
296	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
297	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
298	SPA	Sabal palmetto	Sabal Palm	Remain	11"	10'
299	SPA	Sabal palmetto	Sabal Palm	Remain	10"	10'
300	SPA	Sabal palmetto	Sabal Palm	Remain	10"	16'

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kimley-Horn and Associates, Inc. shall be without liability to Kimley-Horn and Associates, Inc.

jungles						
Phipps Ocean Park - Master Plan - Tree Disposition List 9/23/2022						
Iden.	Symbol	Scientific Name	Common Name	Disposition	DBH	SPREAD
301	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	14'
302	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	11"	14'
303	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	14'
304	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	14'
305	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	05'
306	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	05'
307	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	7"	08'
308	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	10"	08'
309	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	08'
310	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	14'
311	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	14'
312	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
313	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	8"	12'
314	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
315	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	9"	12'
316	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	11"	12'
317	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
318	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	9"	12'
319	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	9"	12'
320	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	8"	06'
321	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	11"	06'
322	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	15"	06'
323	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	15"	12'
324	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	06'
325	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	15"	20'
326	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	20'
327	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	06'
328	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	10'
329	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	08'
330	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	06'
331	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	06'
332	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	06'
333	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
334	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
335	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
336	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	08'
337	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	18"	12'
338	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
339	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	8"	10'
340	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
341	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	12'
343	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	10'
344	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	14"	08'
345	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	16"	16'
346	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	14"	16'
347	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remove	10"	
348	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
349	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remove	12"	
350	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
351	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
352	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	16"	12'
353	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	10'
354	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	10'
355	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	8"	06'
356	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	8"	06'
357	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	10"	08'
358	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remove	18"	
359	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remove	8"	
360	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	10"	06'
361	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remain	12"	14'
362	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	24"	08'
363	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	08'
364	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	14"	08'
365	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	10'
366	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	10'
367	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
368	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Remain	14"	16'
369	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	08'
370	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	08'
371	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	14"	08'
372	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	08'
373	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	12"	06'
374	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	12'
375	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
376	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
377	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	10'
378	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
379	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	16"	06'
380	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
381	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
382	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
383	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	16"	10'
384	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	10'
385	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	12'
386	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	20'
387	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	16'
388	CBR	<i>Calophyllum brasiliense</i>	Brazil Beauty Leaf	Remove	30"	14'
389	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
390	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	16'
391	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	06'
392	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
393	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
394	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	10"	08'
395	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	10'
396	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	12'
397	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	16'
397-B	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	08'
398	CDI	<i>Coccoloba diversifolia</i>	Pigeon Plum	Remain	14"	16'
399	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
400	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	8"	10'

jungles						
Phippos Ocean Park - Master Plan - Tree Disposition List 9/23/2022						
Iden.	Symbol	Scientific Name	Common Name	Disposition	DBH	SPREAD
401	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
402	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Remain	22"	20'
403	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	10'
404	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
405	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	10'
406	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	10'
407	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	10'
408	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Remain	24"	24'
409	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Remain	30"	24'
410	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	8"	06'
411	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	8"	06'
412	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	6"	08'
413	LCH	<i>Livistonia chinensis</i>	Chinese Fan Palm	Remain	3-6"	08'
414	LCH	<i>Livistonia chinensis</i>	Chinese Fan Palm	Remain	3-6"	08'
415	CNU	<i>Cocos nucifera</i>	Coconut Palm	Remain	8"	08'
416	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	20'
417	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	10"	20'
418	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	20'
419	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
420	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	08'
421	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	08'
422	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
423	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	6"	08'
424	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	10"	08'
425	VME	<i>Veitchia meirillii</i>	Christmas Palm	Remove	6"	14'
426	VME	<i>Veitchia meirillii</i>	Christmas Palm	Remove	3-6"	14'
428	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	20'
429	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	16"	06'
430	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	16"	10'
431	CUV	<i>Coccoloba uvifera</i>	Seagrape	Relocate	16"	16'
432	CUV	<i>Coccoloba uvifera</i>	Seagrape	Relocate	12"	16'
432A	CUV	<i>Coccoloba uvifera</i>	Seagrape	Relocate	12"	16'
433	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	4"	18'
434	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	10'
435	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	08'
436	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	10'
437	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	12"	06'
438	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	24"	10'
439	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	24"	10'
440	DRE	<i>Delonix regia</i>	Royal Poinciana	Remove	4"	
441	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	6"	3'
442	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	6"	3'
443	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	6"	3'
444	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	4"	3'
445	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	6"	3'
446	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	4"	8'
447	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	10'
448	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remove	14"	12'
449	CNU	<i>Cocos nucifera</i>	Coconut Palm	Relocate	8"	08'
450	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
451	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
452	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
453	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
454	VME	<i>Veitchia meirillii</i>	Christmas Palm	Remove	5"	14'
455	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	12'
456	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
457	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	05'
458	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remove	10"	12'
459	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
460	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	6"	08'
461	QVI	<i>Quercus virginiana</i>	Live Oak	Relocate	14"	24'
462	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	12"	16'
463	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
464	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	10"	16'
465	PDO	<i>Prunus domestica</i>	Plum Tree	Remove	2"	24'
466	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
467	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
468	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	14"	12'
469	BSI	<i>Bursera simaruba</i>	Gumbo Limbo	Relocate	22"	30'
470	CER	<i>Conocarpus erectus</i>	Green Buttonwood	Relocate	28"	30'
471	CSP	<i>Casuarina spp.</i>	Australian Pine	Remove	20"	20'
472	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	06'
473	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	12'
474	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	12'
475	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	08'
476	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	08'
477	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	12'
478	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	12'
479	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	12"	14'
480	CUV	<i>Coccoloba uvifera</i>	Seagrape	Remain	10"	10'
481	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	18"	14'
481-B	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	10"	08'
482	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	14"	14'
483	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	14"	12'
484	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	16"	12'
485	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
486	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	14'
487	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remove	16"	08'
488	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	18"	12'
489	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	16"	12'
490	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	16"	12'
491	SPA	<i>Sabal palmetto</i>	Sabal Palm	Remain	22"	06'
492	DRE	<i>Delonix regia</i>	Royal Poinciana	Remove	2"	
493	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
494	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
495	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	12'
496	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
497	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	10"	12'
498	SPA	<i>Sabal palmetto</i>	Sabal Palm	Relocate	12"	20'
499	CUV	<i>Coccoloba uvifera</i>	Seagrape	Relocate	12"	12'